


Photologic® Slotted Optical Switches Types OPB900L, OPB910L "Wide Gap" Series

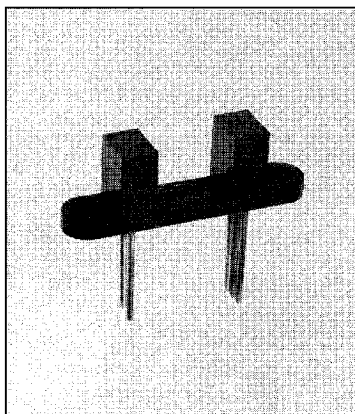


Features

- 0.375" (9.53 mm) wide gap
- Choice of output configuration
- Choice of opaque or IR transmissive shell material
- Data rates to 250 kBaud
- 0.570" (14.48 mm) lead spacing

Description

The OPB900L and OPB910L series of Photologic® Photo Integrated Circuit Switches provide optimum flexibility for the design engineer. Building from a standard housing with a 0.375" (9.53 mm) wide slot, the user can specify (1) type and polarity of TTL output and (2) discrete shell material. Available with wire leads as OPB900W/OPB910W series.

The electrical output can be specified as either TTL totem pole or TTL open collector. Either may be supplied with inverter or buffer output polarity. All have added stability of a built-in hysteresis amplifier.

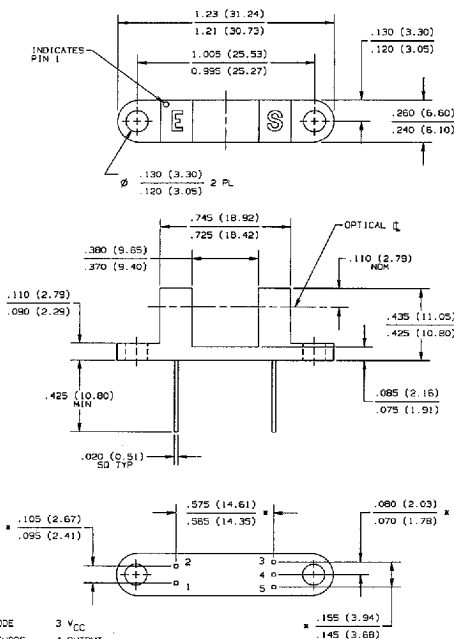

Absolute Maximum Ratings (T_A = 25° C unless otherwise noted)

Supply Voltage, V _{CC} (Not to exceed 3 sec.)	10 V
Storage Temperature Range	-40° C to +85° C
Operating Temperature Range	-40° C to +70° C
Lead Soldering Temperature [1/16 inch (1.6 mm) from case for 5 sec. with soldering iron]	240° C ⁽¹⁾
Input Diode Power Dissipation	100 mW ⁽²⁾
Output Photologic® Power Dissipation	200 mW ⁽³⁾
Total Device Power Dissipation	300 mW ⁽⁴⁾
Voltage at Output Lead (Open Collector Output)	35 V
Diode Forward D.C. Current	40 mA
Diode Reverse D.C. Voltage	2 V

Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering.
- (2) Derate linearly 2.22 mW/° C above 25° C.
- (3) Derate linearly 4.44 mW/° C above 25° C.
- (4) Derate linearly 6.66 mW/° C above 25° C.
- (5) The OPB900L/OPB910L series are terminated with 0.020" square leads designed for printed circuit board mounting.
- (6) Normal application would be with light source blocked, simulated by I_F = 0 mA.
- (7) All parameters tested using pulse technique.
- (8) Methanol or isopropanol are recommended as cleaning agents. Plastic housings are soluble in chlorinated hydrocarbons and ketones.

Types OPB900L, OPB910L Series

Electrical Characteristics (T_A = -40° C to +70° C unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Input Diode						
V _F	Forward Voltage			1.7	V	I _F = 20 mA, T _A = 25° C
I _R	Reverse Current			100	μA	V _R = 2 V, T _A = 25° C
Output Photologic[®] Sensor						
V _{CC}	Operating D.C. Supply Voltage	4.75		5.25	V	
I _{CC} L	Low Level Supply Current: Buffered Totem-Pole Output Buffered Open-Collector Output			15	mA	V _{CC} = 5.25 V, I _F = 0 mA ⁽⁶⁾
	Inverted Totem-Pole Output Inverted Open-Collector Output			15	mA	V _{CC} = 5.25 V, I _F = 20 mA
I _{CC} H	High Level Supply Current: Buffered Totem-Pole Output Buffered Open-Collector Output			15	mA	V _{CC} = 5.25 V, I _F = 20 mA
	Inverted Totem-Pole Output Inverted Open-Collector Output			15	mA	V _{CC} = 5.25 V, I _F = 0 mA ⁽⁶⁾
V _{OL}	Low Level Output Voltage: Buffered Totem-Pole Output Buffered Open-Collector Output			0.4	V	V _{CC} = 4.75 V, I _{OL} = 12.8 mA I _F = 0 mA ⁽⁶⁾
	Inverted Totem-Pole Output Inverted Open-Collector Output			0.4	V	V _{CC} = 4.75 V, I _{OL} = 12.8 mA I _F = 20 mA
V _{OH}	High Level Output Voltage: Buffered Totem-Pole Output	2.4			V	V _{CC} = 4.75 V, I _{OH} = -800 μA I _F = 20 mA
	Inverted Totem-Pole Output	2.4			V	V _{CC} = 4.75V, I _{OH} = -800 μA I _F = 0 mA ⁽⁶⁾
I _{OH}	High Level Output Current: Buffered Open-Collector Output			100	μA	V _{CC} = 4.75 V, V _{OH} = 30 V I _F = 20 mA, T _A = 25° C
	Inverted Open-Collector Output			100	μA	V _{CC} = 4.75 V, V _{OH} = 30 V I _F = 0 mA, T _A = 25° C
I _{F(+)}	LED Positive-Going Threshold Current			20	mA	V _{CC} = 5 V, T _A = 25° C
I _{F(+)} /I _{F(-)}	Hysteresis		2.0			V _{CC} = 5 V
I _{OS}	Short Circuit Output Current: Buffered Totem-Pole Output	-30		-100	mA	V _{CC} = 5.25 V, I _F = 20 mA Output = GND
	Inverted Totem-Pole Output	-30		-100	mA	V _{CC} = 5.25 V, I _F = 0 mA Output = GND
t _r , t _f	Output Rise Time, Output Fall Time		70		ns	V _{CC} = 5 V, T _A = 25° C
t _{PLH} , t _{PHL}	Propagation Delay Low-High & High Low		5.0		μs	I _F = 0 or 20 mA R _L = 8 TTL Loads (Totem-Pole) R _L = 360 Ω (Open-Collector)

SLOTTED
OPTICAL
SWITCHES

Housing

All housings are an opaque grade of injection-molded plastic to minimize the assembly's sensitivity to ambient radiation, both visible and near-infrared. Discrete shells (exposed on the parallel faces inside the device throat) are either IR transmissive plastic for applications where aperture contamination may occur or opaque plastic for maximum protection against ambient light.

■ 6798580 0003103 5TT ■


Optek reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Optek Technology, Inc. 1215 W. Crosby Road Carrollton, Texas 75006 (972)323-2200 Fax (972)323-2396

Types OPB900L, OPB910L Series

PART NUMBER GUIDE

OPB 9 X X X X X

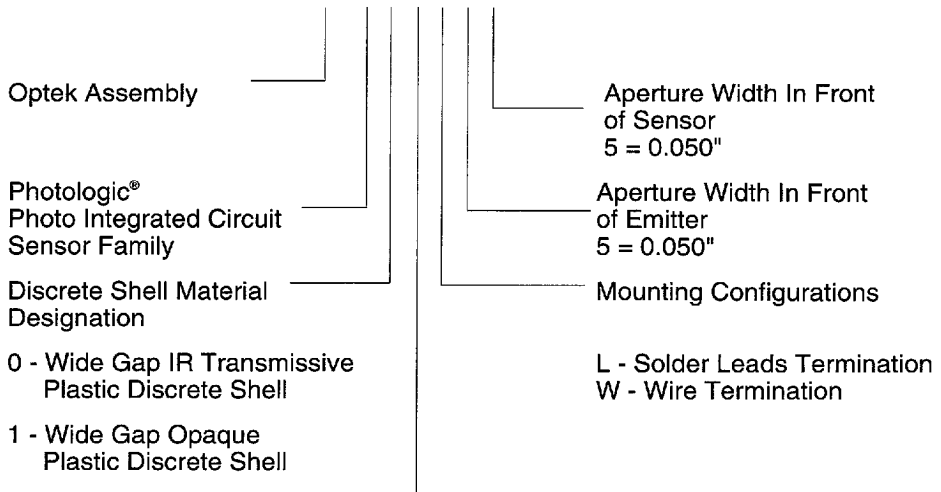


Electrical Specification Variations


- 0 - Buffered Totem-Pole Output
- 1 - Buffered Open-Collector Output
- 2 - Inverted Totem-Pole Output
- 3 - Inverted Open-Collector Output

Schematics


**OPB900/OPB910
(Totem-Pole Output)
Buffer**




**OPB901/OPB911
(Open-Collector Output)
Buffer**



**OPB902/OPB912
(Totem-Pole Output)
Inverter**




**OPB903/OPB913
(Open-Collector Output)
Inverter**





■ 6798580 0003104 436 ■




Typical Performance Curves

Output Voltage
vs Ambient Temperature


OPB900L, OPB902L, OPB910L, OPB912L

Short Circuit Output Current
vs Ambient TemperatureAll Assemblies
Propagation Time
vs Ambient TemperatureSLOTTED
OPTICAL
SWITCHES



OPB901L, OPB903L, OPB911L, OPB913L

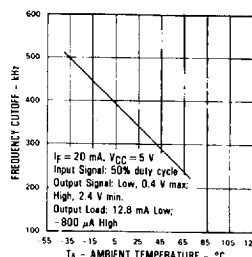Output Current (High)
vs Ambient TemperatureRise Time and Fall Time
vs Ambient TemperatureAll Assemblies
Data Rate
vs Ambient Temperature


OPB902L, OPB903L, OPB912L, OPB913L

Normalized Supply Current
vs Ambient Temperature


OPB900L, OPB901L, OPB910L, OPB911L

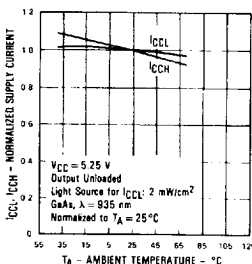Normalized Supply Current
vs Ambient TemperatureAll Assemblies
Trigger Current
vs Ambient Temperature

Switching Test Curve for Buffers



Switching Test Curve for Inverters



Optek reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Optek Technology, Inc.

1215 W. Crosby Road

Carrollton, Texas 75006

(972)323-2200

Fax (972)323-2396