

## Glass Passivated Standard Recovery Diodes (Stud Version), 70A

### FEATURES

- Glass passivated chips
- High surge current capability
- Stud cathode and stud anode version
- Wide current range
- Voltage up to 1600V  $V_{RRM}$
- RoHS compliant

### TYPICAL APPLICATIONS

- Battery charges
- Converters
- Power supplies
- Machine tool controls
- Welder



DO-203AB(DO-5)

PRODUCT SUMMARY	
$I_{F(AV)}$	70A

MAJOR RATINGS AND CHARACTERISTICS				
PARAMETER	TEST CONDITIONS	70D(R)		UNIT
		02 TO 12	16	
$I_{F(AV)}$	$T_C$	70	70	A
		140	110	°C
$I_{F(RMS)}$		110		A
$I_{FSM}$	50 HZ	1200		A
	60 HZ	1250		
$I^2t$	50 HZ	7200		A <sup>2</sup> s
	60 HZ	6540		
$V_{RRM}$	Range	200 to 1200	1600	V
$T_J$		-65 to 180	-65 to 150	°C

### ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS					
TYPE NUMBER	VOLTAGE CODE	$V_{RRM}$ , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	$V_{RSM}$ , MAXIMUM NON-REPETITIVE PEAK VOLTAGE V	$V_{R(BR)}$ , MINIMUM AVALANCHE VOLTAGE V <sup>(1)</sup>	$V_{RRM}$ , MAXIMUM AT $T_J=175^\circ\text{C}$ mA
75D(R)	02	200	300	300	15
	04	400	500	500	
	06	600	720	725	
	08	800	960	950	9
	10	1000	1200	1150	
	12	1200	1440	1350	
	16	1600	1900	1750	
					4.5

FORWARD CONDUCTION							
PARAMETER	SYMBOL	TEST CONDITIONS			70D(R)		UNIT
					02 TO 12	16	
Maximum average forward current at case temperature	$I_{F(AV)}$	180° conduction, half sine wave			70	70	A
					140	110	°C
Maximum RMS forward current	$I_{F(RMS)}$				110		A
Maximum peak, one-cycle forward, non-repetitive surge current	$I_{FSM}$	t = 10ms	No voltage reappplied	Sinusoidal half wave, initial $T_J = T_J$ maximum	1200		A
		t = 8.3ms			1250		
		t = 10ms	100% $V_{RRM}$ reappplied		1000		
		t = 8.3ms			1050		
Maximum $I^2t$ for fusing	$I^2t$	t = 10ms	No voltage reappplied		7200		$A^2s$
		t = 8.3ms			6540		
		t = 10ms	100% $V_{RRM}$ reappplied		5070		
		t = 8.3ms			4610		
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	t = 0.1 to 10 ms, no voltage reappplied			72000		$A^2\sqrt{s}$
Maximum forward voltage drop	$V_{FM}$	$I_{pk} = 220A, T_J = 25^\circ C, t_p = 400\mu s$ rectangular wave			1.35	1.46	V

THERMAL AND MECHANICAL SPECIFICATIONS							
PARAMETER	SYMBOL	TEST CONDITIONS			70D(R)		UNIT
					02 TO 12	16	
Maximum junction operating and storage temperature range	$T_J, T_{stg}$				- 65 to 180	- 65 to 150	°C
Maximum thermal resistance, junction to case	$R_{thJC}$	DC operation			0.45		K/W
Maximum thermal resistance case to heatsink	$R_{thCS}$	Mounting surface, smooth, flat and greased			0.25		
Maximum allowable mounting torque (+0% , -10%)		Not lubricated thread ,tighting on nut <sup>(1)</sup>			3.4(30)		N · m (lbf · in)
		Lubricated thread ,tighting on nut <sup>(1)</sup>			2.3(20)		
		Not lubricated thread ,tighting on hexagon <sup>(2)</sup>			4.2(37)		N · m (lbf · in)
		Lubricated thread ,tighting on hexagon <sup>(2)</sup>			3.2(28)		
Approximate weight					15		g
					0.53		oz.
Case style		See dimensions - link at the end of datasheet			DO-203AB (DO-5)		

**Note**


- (1) Recommended for pass-through holes.
- (2) Recommended for holed threaded heatsinks.

$\Delta R_{thJC}$ CONDUCTION					
CONDUCTION ANGEL	SINUSOIDAL CONDUCTION	RECTANGULAR CONDUCTION	TEST CONDUCTIONS		UNITS
180°	0.08	0.06	$T_J = T_J$ maximum		K/W
120°	0.10	0.11			
90°	0.13	0.14			
60°	0.19	0.20			
30°	0.30	0.30			


**Note**

- The table above shows the increment of thermal resistance  $R_{thJC}$  when devices operate at different conduction angles than DC


**Fig.1 Current Ratings Characteristics**

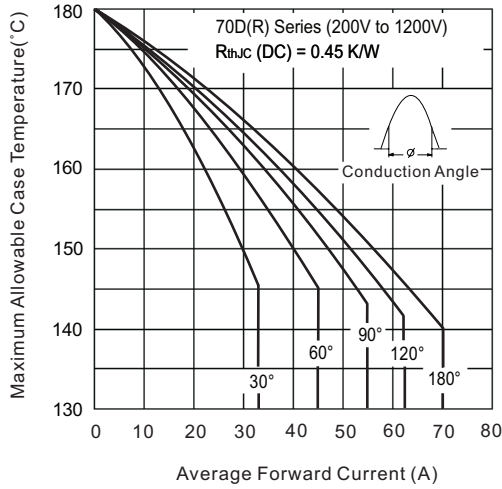


**Fig.2 Current Ratings Characteristics**

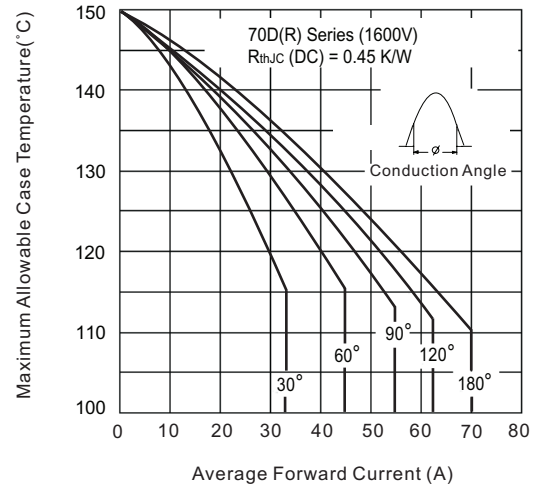


**Fig.3 Current Ratings Characteristics**

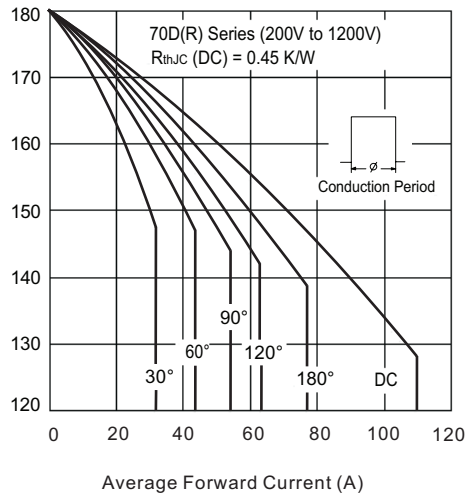


**Fig.4 Current Ratings Characteristics**

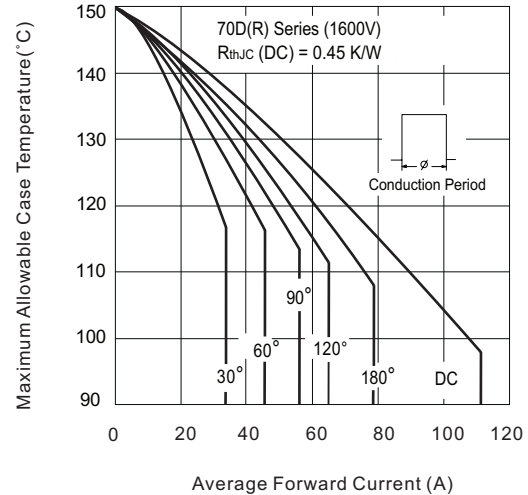


**Fig.5 Forward Power Loss Characteristics**

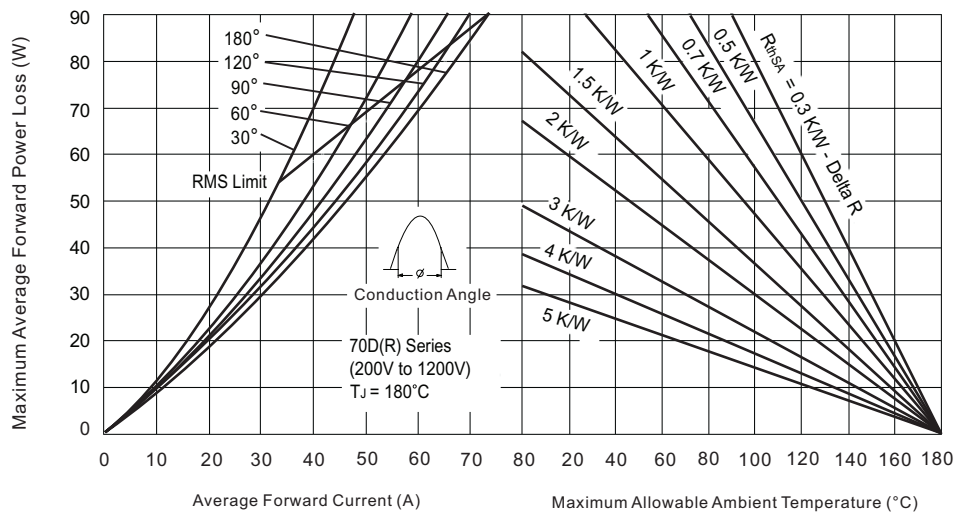


**Fig.6 Forward Power Loss Characteristics**

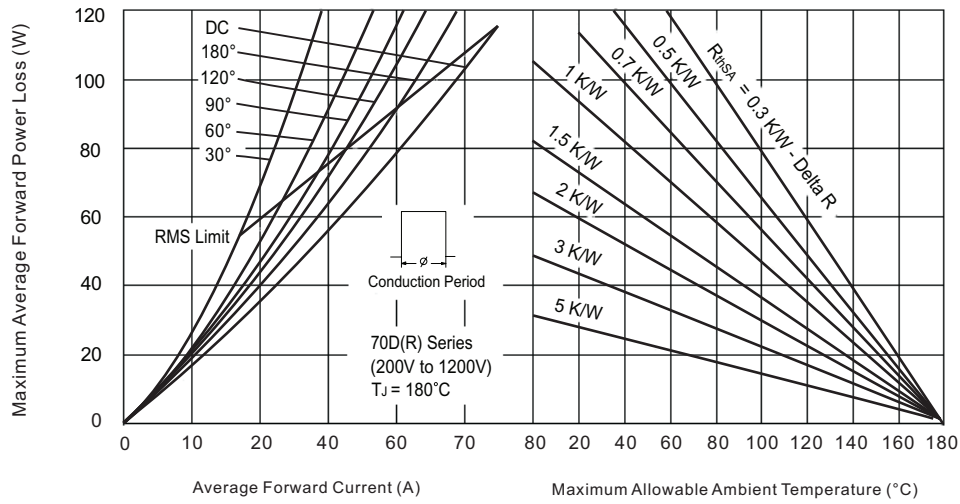


**Fig.7 Forward Power Loss Characteristics**

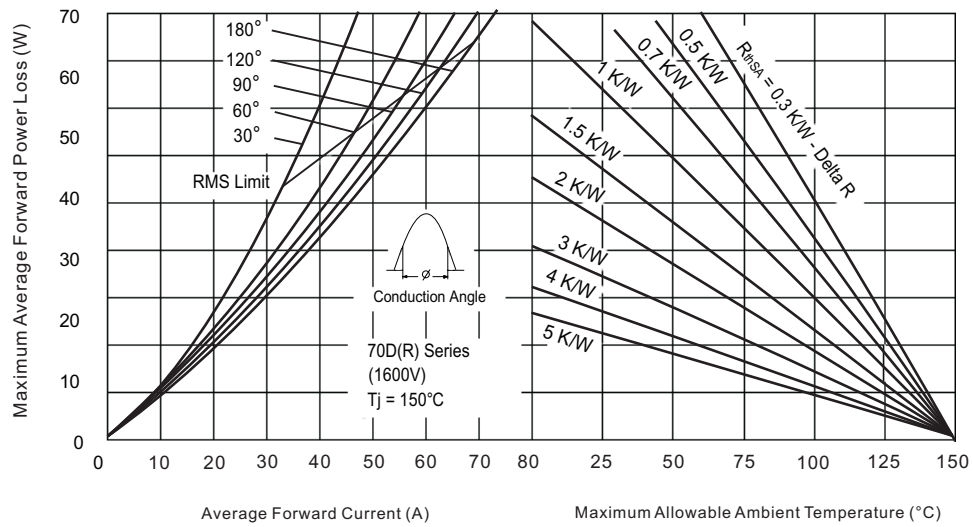


**Fig.8 Forward Power Loss Characteristics**

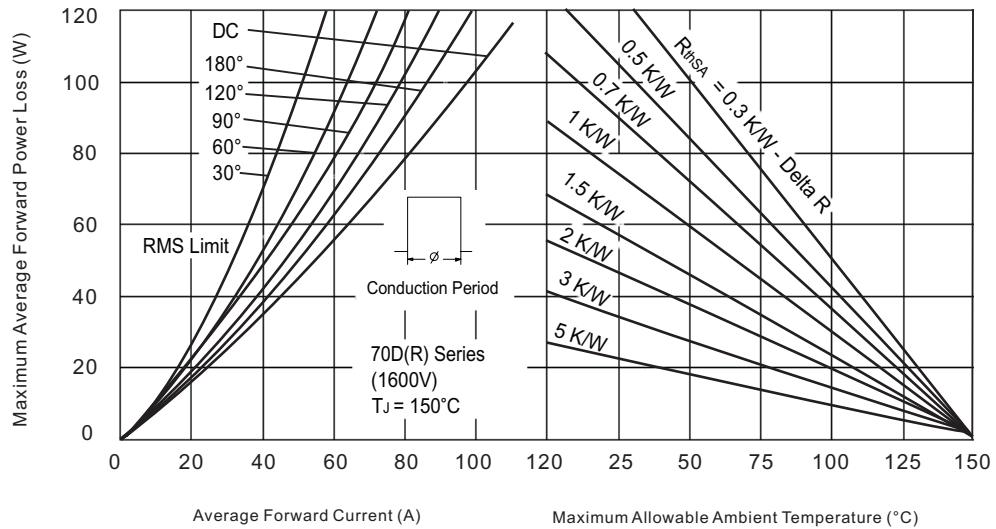


**Fig.10 Maximum Non-Repetitive Surge Current**

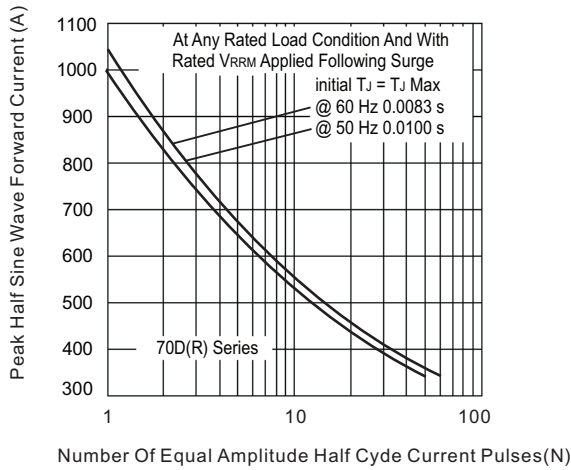


**Fig.10 Forward Voltage Drop Characteristics**

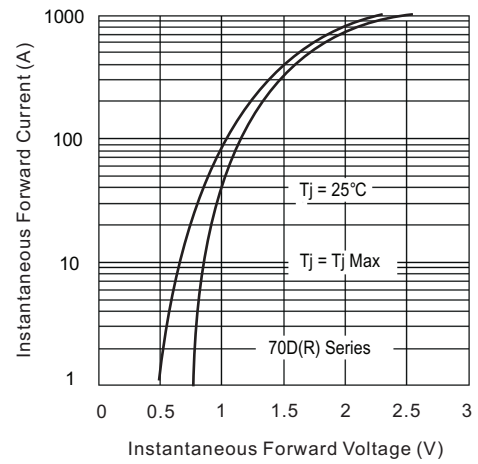


**Fig.11 maximum Non-Repetitive Surge Current**

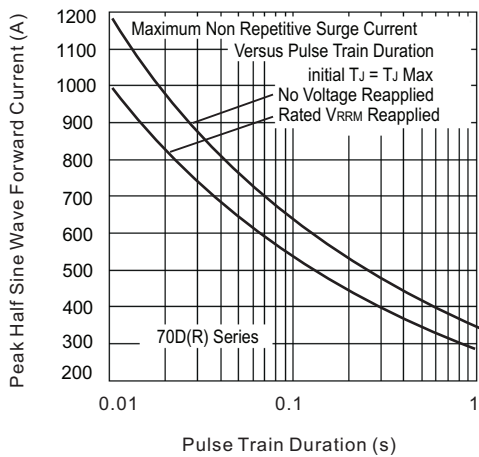

**Fig.12 Thermal Impedance  $Z_{thJC}$  Characteristics**

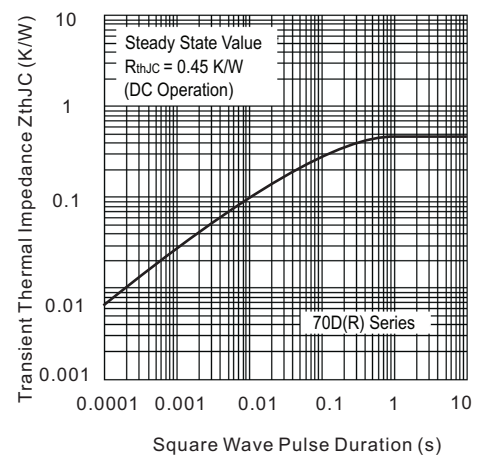

**Fig.13 Forward Voltage Drop Characteristics**

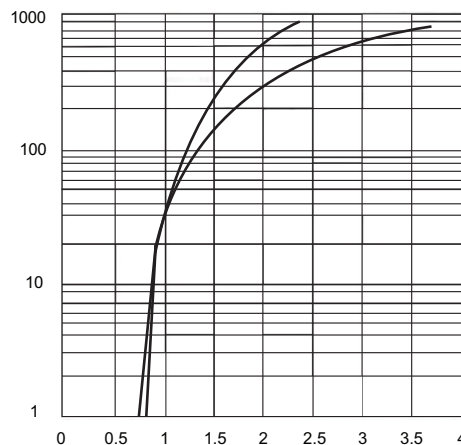

### ORDERING INFORMATION TABLE

Device code	<b>70</b>	<b>D</b>	<b>R</b>	<b>12</b>	<b>M</b>
	①	②	③	④	⑤

- ① - Current rating: Code =  $I_{F(AV)}$
- ② - D = Standard recovery device
- ③ - None = Stud normal polarity (cathode to stud)  
R = Stud reverse polarity (anode to stud)
- ④ - Voltage code 100 =  $V_{RRM}$  (see Voltage Ratings table)
- ⑤ - None = Stud base DO-203AB (DO-5) 1/4"-28 UNF-2A  
M = Stud base DO-230AB (DO-5) M6 1

