

D8LD20U

200V 8A

FEATURES

- Low noise
- trr35ns
- Fully Isolated Molding

APPLICATION

- Switching power supply
- Free Wheel
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

RATINGS


●Absolute Maximum Ratings (If not specified Tc=25°C)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T stg		-40~150	°C
Operating Junction Temperature	T j		150	°C
Maximum Reverse Voltage	V RM		200	V
Average Rectified Forward Current	I o	50Hz sine wave, R-load, Rating for each diode I o/2, T c=122°C	8	A
Peak Surge Forward Current	I FSM	50Hz sine wave, Non-repetitive 1 cycle peak value, T j=25°C	60	A
Dielectric Strength	V dis	Terminals to case, AC 1 minute	1.5	kV
Mounting Torque	T OR	(Recommended torque: 0.3N·m)	0.5	N·m

●Electrical Characteristics (If not specified Tc=25°C)


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V F	I F=4A, Pulse measurement, Rating of per diode	Max 0.98	V
Reverse Current	I R	V R=V RM, Pulse measurement, Rating of per diode	Max 10	μ A
Reverse Recovery Time	trr	I F=0.5A, I R=1A, Rating of per diode	Max 35	ns
Thermal Resistance	θ jc	junction to case	Max 3.3	°C/W
	θ jf	junction to heatsink (Reference value)	Max 4.8	

OUTLINE DIMENSIONS

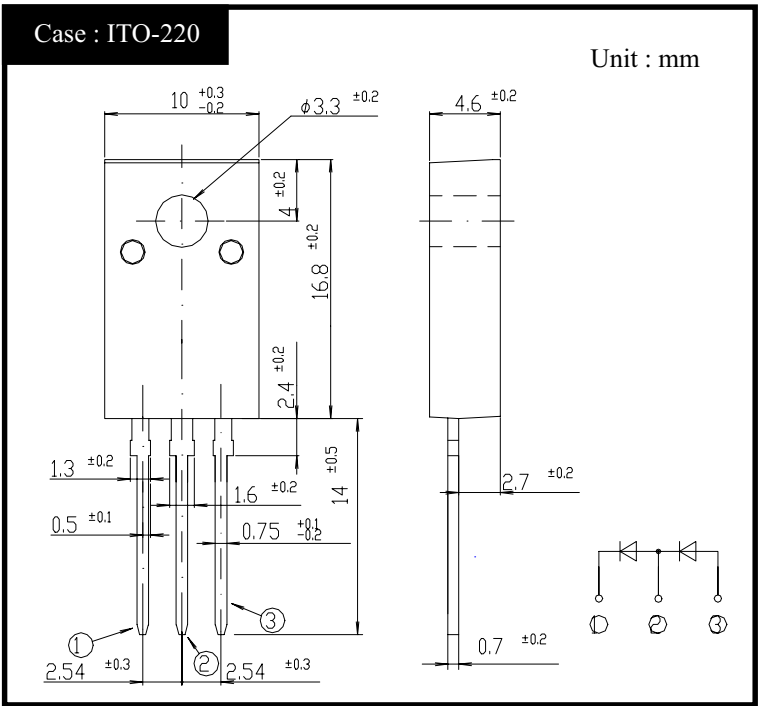


D8LD20U

Forward Voltage

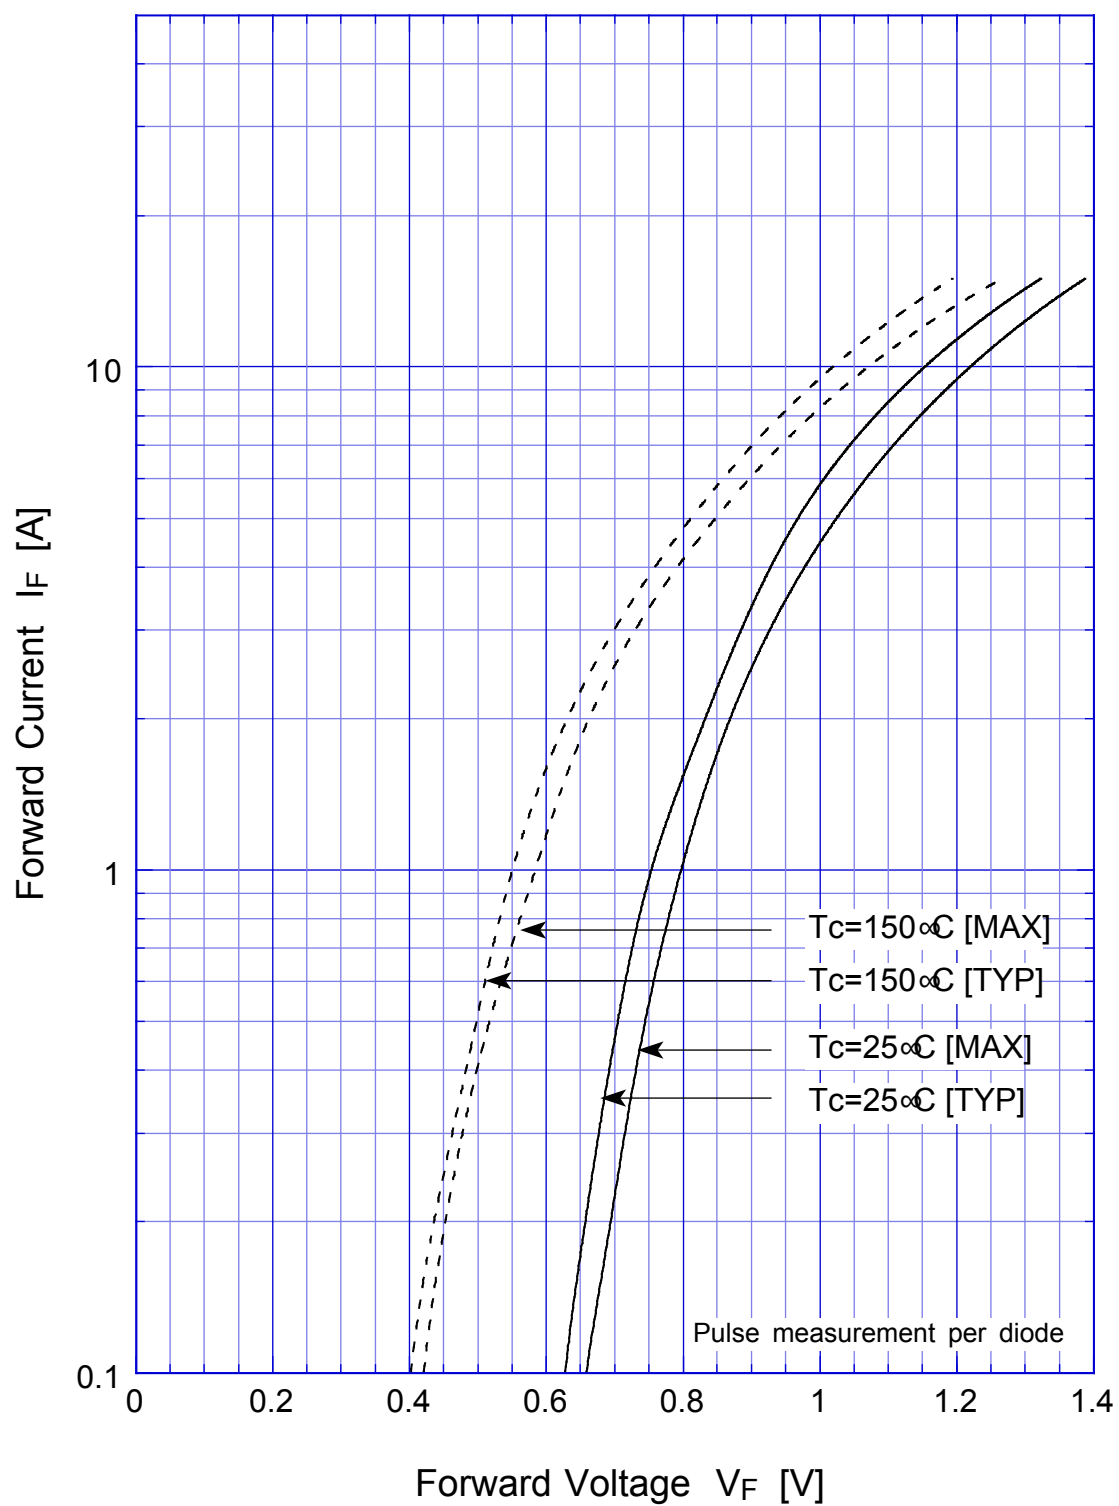


D8LD20U

Forward Power Dissipation

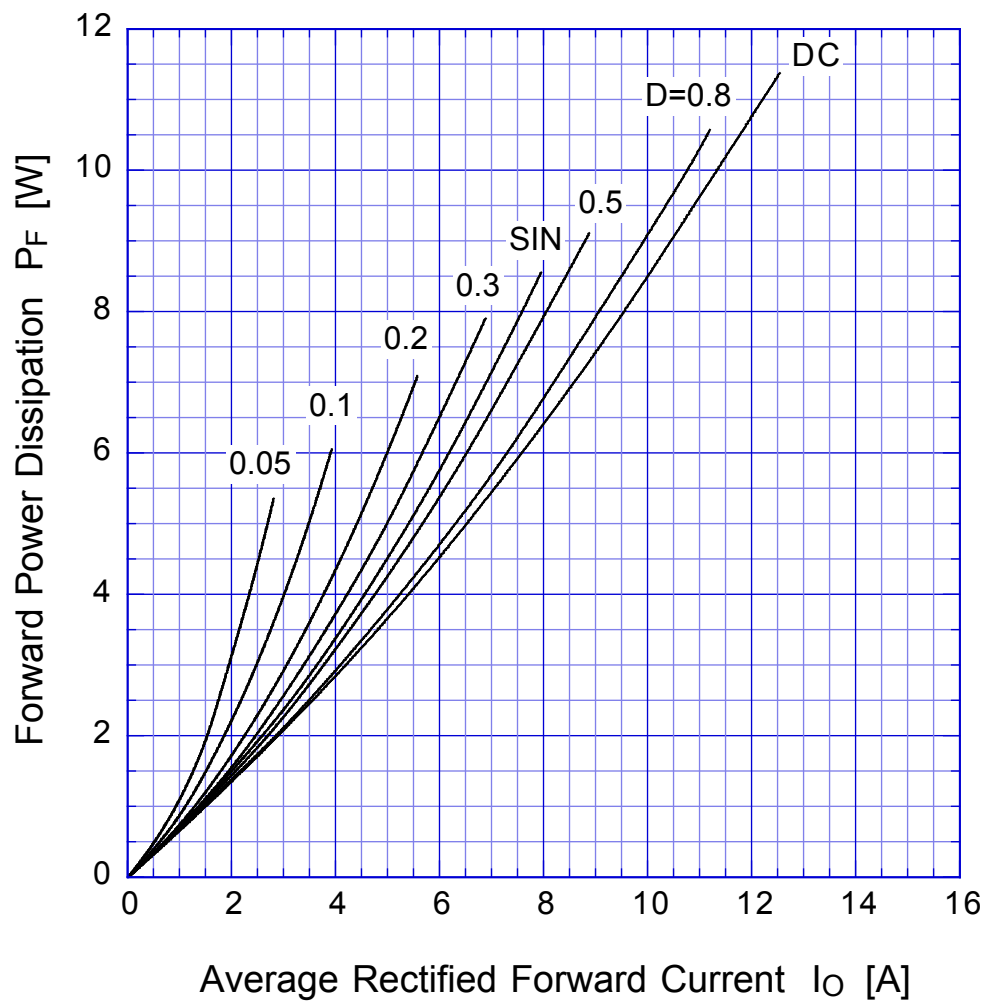


$T_j = T_{jmax}$

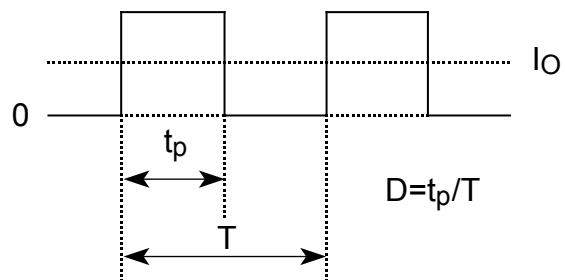


D8LD20U

Derating Curve

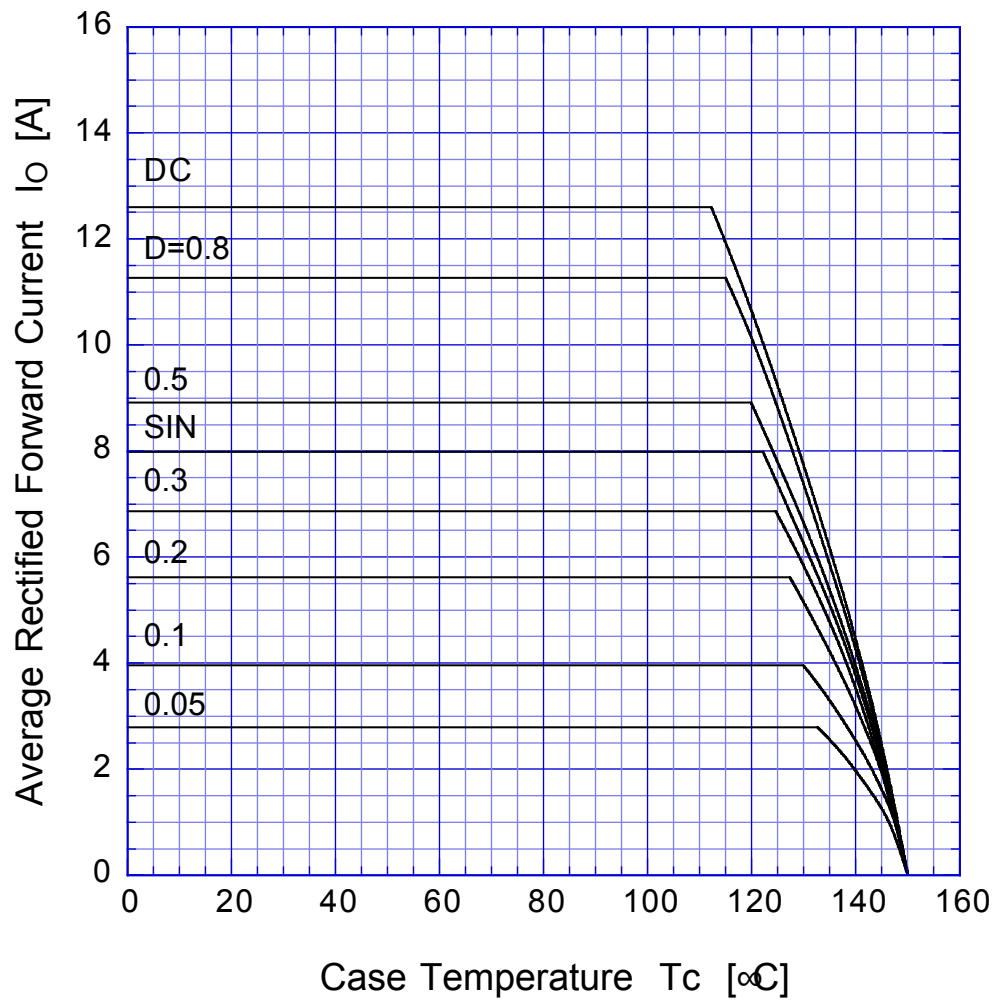


$$V_R = V_{RM}$$

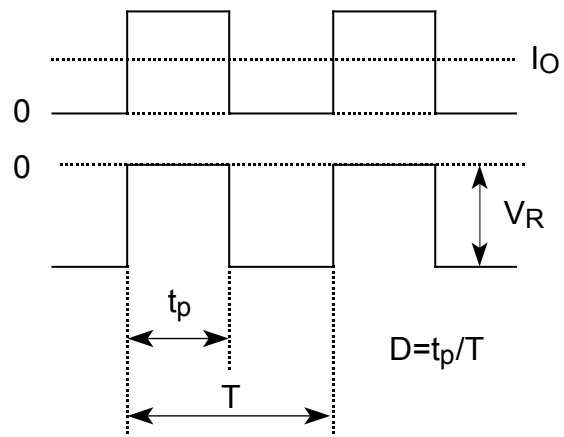

D8LD20U

Peak Surge Forward Capability

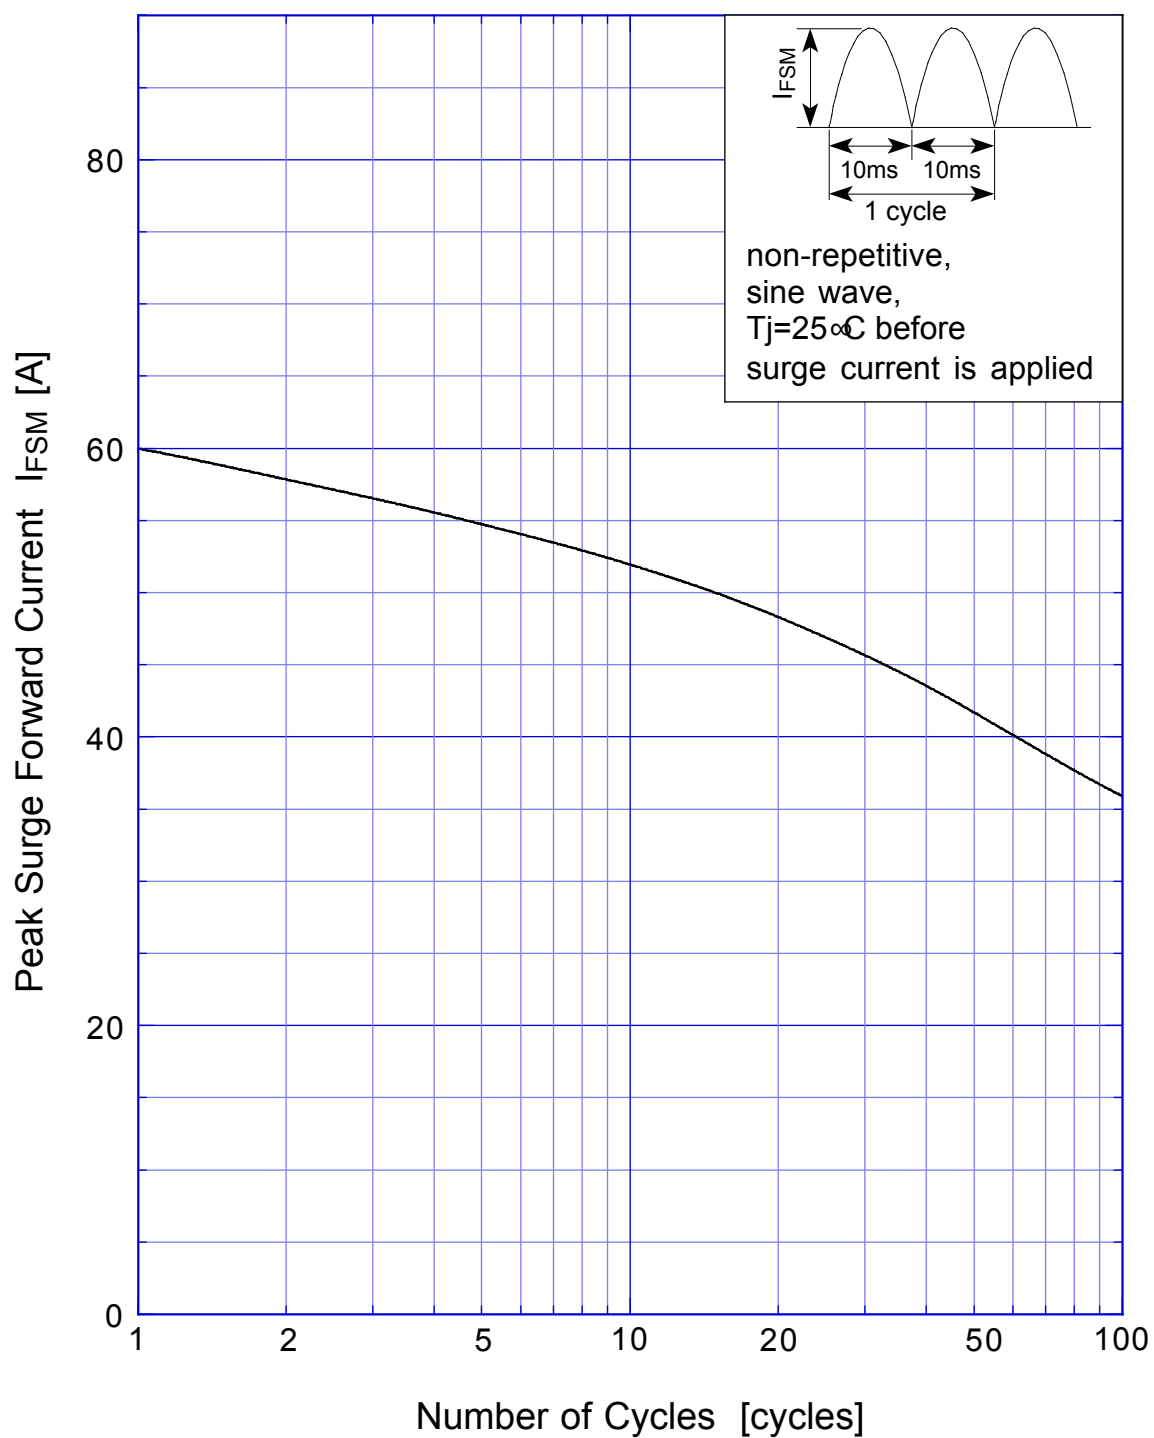

D8LD20U Junction Capacitance

