



U74LVC373

CMOS IC

OCTAL TRANSPARENT D-TYPE LATCHES WITH 3-STATE OUTPUTS

■ DESCRIPTION


The UTC **U74LVC373** is a octal transparent D-type latch with 3-state outputs, and it has 8 channels.


■ FEATURES

- * Operate from 1.65V to 3.6V
- * Inputs accept voltages to 5.5V
- * Max t_{pd} of 6.8ns @ 3.3V
- * Typical $V_{OL} < 0.8V$ @ $V_{CC} = 3.3V$, $T_a = 25^\circ C$
- * Typical $V_{OH} > 2.0V$ @ $V_{CC} = 3.3V$, $T_a = 25^\circ C$
- * Support mixed-mode signal operation on all ports (5V input/output voltage with 3.3V V_{CC})
- * I off supports partial-power-down mode operation
- * Halogen Free


■ ORDERING INFORMATION

Ordering Number	Package	Packing
U74LVC373G-P20-R	TSSOP-20	Tape Reel
U74LVC373G-R20-R	SSOP-20	Tape Reel

U74LVC373G-P20-R 	(1)Packing Type (2)Package Type (3)Lead Plating	(1) R: Tape Reel (2) P20: TSSOP-20, R20: SSOP-20 (3) G: Halogen Free
---	---	--




TSSOP-20



SSOP-20

■ PIN CONFIGURATION

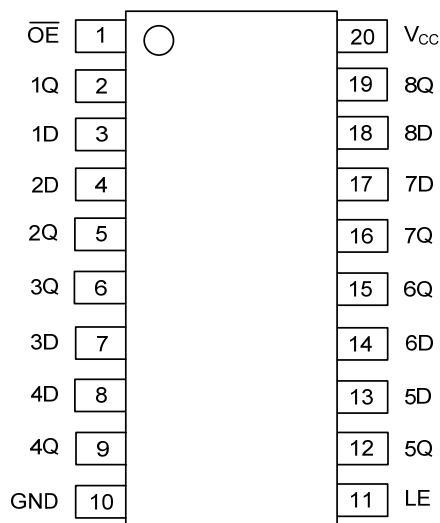


■ FUNCTION TABLE


INPUTS(\overline{OE})	INPUTS(LE)	INPUTS(D)	OUTPUT(Q)
L	H	H	H
L	H	L	L
L	L	X	Q0
H	X	X	Z

Note: H: HIGH voltage level; L: LOW voltage level.

■ LOGIC SYMBOL

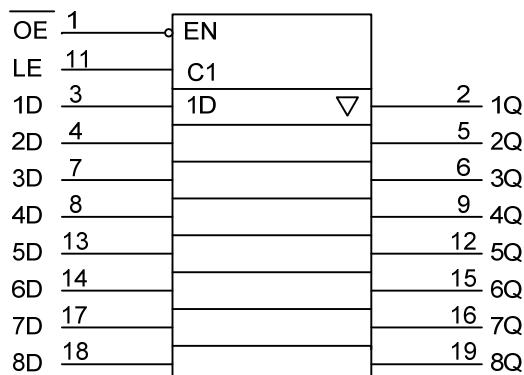

■ LOGIC DIAGRAM

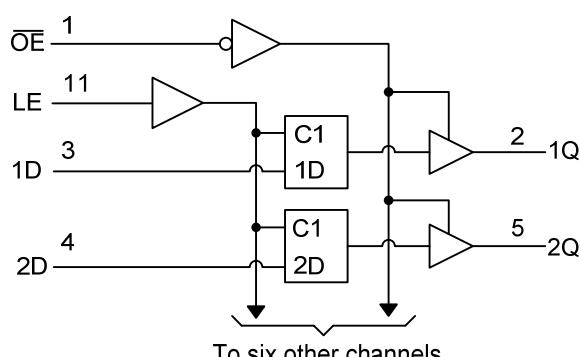

■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V _{CC}	-0.5 ~ 6.5	V
Input Voltage	V _{IN}	-0.5 ~ 6.5	V
Output Voltage	V _{OUT}	-0.5 ~ 6.5 (Note 2)	V
		-0.5 ~ V _{CC} +0.5 (Note 3)	
V _{CC} or GND Current	I _{CC}	±100	mA
Output Current	I _{OUT}	±50	mA
Input Clamp Current	I _{IK}	-50	mA
Output Clamp Current	I _{OK}	-50	mA
Operating Temperature	T _{OPR}	-40 ~ + 85	°C
Storage Temperature	T _{STG}	-65 ~ + 150	°C

Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Voltage range applied to any output in the high-impedance or power-off state.

3. Voltage range applied to any output in the high or low state, and V_{CC} is provided in the recommended operating conditions table.

■ THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Junction-to-Ambient	θ _{JA}			115	°C/W

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V _{CC}	Operating	1.65		3.6	V
		Data retention only	1.5			
High-level Input Voltage	V _{IH}	V _{CC} =1.65V to 1.95V	0.65×V _{CC}			V
		V _{CC} =2.3V to 2.7V	1.7			
		V _{CC} =2.7V to 3.6V	2			
Low-level Input Voltage	V _{IL}	V _{CC} =1.65V to 1.95V			0.35×V _{CC}	V
		V _{CC} =2.3V to 2.7V			0.7	
		V _{CC} =2.7V to 3.6V			0.8	
Input Voltage	V _{IN}		0		5.5	V
Output Voltage	V _{OUT}	High or low state	0		V _{CC}	V
		3 state	0		5.5	
High-level Output Current	I _{OH}	V _{CC} =1.65V			-4	mA
		V _{CC} =2.3V			-8	
		V _{CC} =2.7V			-12	
		V _{CC} =3V			-24	
Low-level Output Current	I _{OL}	V _{CC} =1.65V			4	mA
		V _{CC} =2.3V			8	
		V _{CC} =2.7V			12	
		V _{CC} =3V			24	
Input Rise or Fall Times	t _R , t _F		0		10	ns/V

■ ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP (Note 1)	MAX	UNIT
Output Voltage High-Level	V_{OH}	$V_{CC}=1.65\sim 3.6V, I_{OH}=-100\mu A$	$V_{CC}-0.2$			V
		$V_{CC}=1.65V, I_{OH}=-4mA$	1.2			
		$V_{CC}=2.3V, I_{OH}=-8mA$	1.7			
		$V_{CC}=2.7V, I_{OH}=-12mA$	2.2			
		$V_{CC}=3V, I_{OH}=-12mA$	2.4			
		$V_{CC}=3V, I_{OH}=-24mA$	2.2			
Output Voltage Low-Level	V_{OL}	$V_{CC}=1.65\sim 3.6V, I_{OL}=100\mu A$		0.2		V
		$V_{CC}=1.65V, I_{OL}=4mA$		0.45		
		$V_{CC}=2.3V, I_{OL}=8mA$		0.7		
		$V_{CC}=2.7V, I_{OL}=12mA$		0.4		
		$V_{CC}=3V, I_{OL}=24mA$		0.55		
Input Leakage Current	$I_{I(LEAK)}$	$V_{CC}=3.6V, V_{IN}=0$ to $5.5V$		± 5	μA	
Power OFF Leakage Current	I_{OFF}	$V_{CC}=0V, V_{IN}$ or $V_{OUT}=5.5V$		± 10	μA	
Disable Output Leakage Current	I_{OZ}	$V_{CC}=3.6V, V_{OUT}=0$ to $5.5V$		± 10	μA	
Quiescent Supply Current	I_Q	$V_{CC}=3.6V, V_{IN}=V_{CC}$ or GND, $I_{OUT}=0$		10	μA	
		$V_{CC}=3.6V, 3.6V \leq V_{IN} \leq 5.5V$, $I_{OUT}=0$ (Note 2)		10	μA	
Additional Quiescent Supply Current	ΔI_Q	$V_{CC}=2.7\sim 3.6V$, One input at $V_{CC}-0.6V$, Other inputs at V_{CC} or GND			500	μA
Input Capacitance	C_I	$V_{CC}=3.3V, V_{IN}=V_{CC}$ or GND		4		pF
Output Capacitance	C_O	$V_{CC}=3.3V, V_{OUT}=V_{CC}$ or GND		5.5		pF

Note: 1. $V_{CC}=3.3V$, $T_a=25^\circ C$

2. This applies in the disabled state only.


■ SWITCHING CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
From D to Q	t_{PLH}/t_{PHL}	$V_{CC}=2.7V$			7.8	ns
		$V_{CC}=3.3V \pm 0.3V$	1.5		6.8	
From LE to Q		$V_{CC}=2.7V$			8.2	
		$V_{CC}=3.3V \pm 0.3V$	2		7.6	
From \overline{OE} to Q	t_{PZL}/t_{PZH}	$V_{CC}=2.7V$			8.7	ns
		$V_{CC}=3.3V \pm 0.3V$	1.5		7.7	
From \overline{OE} to Q	t_{PLZ}/t_{PHZ}	$V_{CC}=2.7V$			7.6	ns
		$V_{CC}=3.3V \pm 0.3V$	1.5		7	
Pulse Width	t_W	$V_{CC}=2.7V$	3.3			ns
		$V_{CC}=3.3V \pm 0.3V$	3.3			
Setup Time	t_{SU}	$V_{CC}=2.7V$	2			ns
		$V_{CC}=3.3V \pm 0.3V$	2			
Hold Time	t_h	$V_{CC}=2.7V$	1.5			ns
		$V_{CC}=3.3V \pm 0.3V$	1.5			

■ OPERATING CHARACTERISTICS($T_a=25^\circ C$)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C_{pd}	$OE=0, f=10MHz, V_{CC}=3.3V \pm 0.3V$		46		pF
		$OE=1, f=10MHz, V_{CC}=3.3V \pm 0.3V$		3		

■ TEST CIRCUIT AND WAVEFORMS

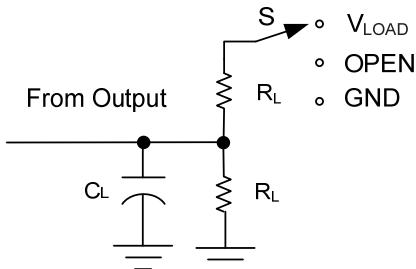


TEST CIRCUIT


V_{CC}	V_{IN}	t_{PLZ}/t_{PZL} (V_{LOAD})	t_{PLH}/t_{PHL}	t_{PHZ}/t_{PZH}	C_L	R_L (Note 1)	ΔV
$1.8V \pm 0.15V$	V_{CC}	$2 \times V_{CC}$	OPEN	OPEN	$30pF$	$1k\Omega$	$0.15V$
$2.5V \pm 0.2V$	V_{CC}	$2 \times V_{CC}$	OPEN	GND	$30pF$	500Ω	$0.15V$
$2.7V$	$2.7V$	$6V$	OPEN	GND	$50pF$	500Ω	$0.3V$
$3.3V \pm 0.3V$	$2.7V$	$6V$	OPEN	GND	$50pF$	500Ω	$0.3V$

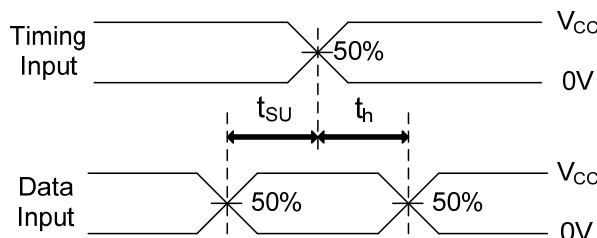


SETUP TIME AND HOLD TIME

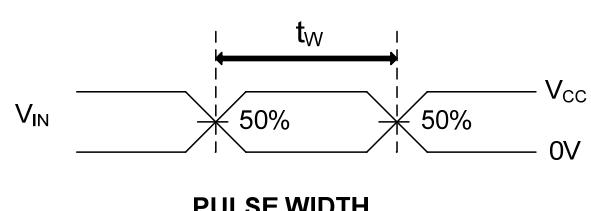

PULSE WIDTH

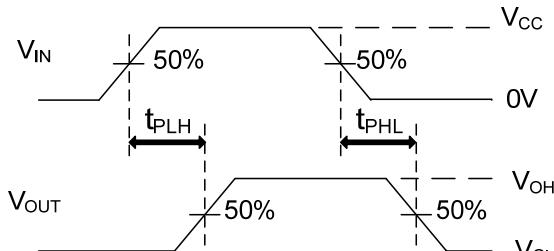

PROPAGATION DELAY TIMES

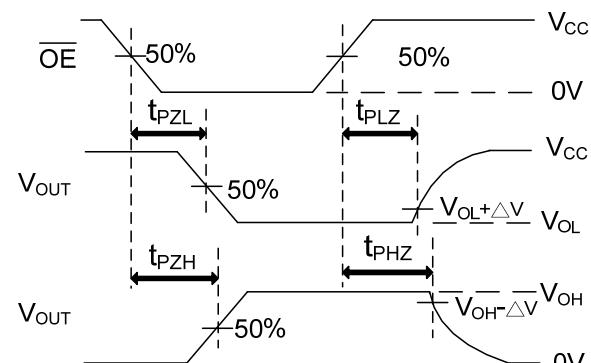

ENABLE AND DISABLE TIMES

Note: 1. C_L includes probe and jig capacitance.
2. PRR \leq 10MHz, $Z_0=50\Omega$, $t_{THL}\leq 2ns$, $t_{TLH}\leq 2ns$.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.