


Electrical Specifications at 25°C


Parameter			Units
Impedance	PRI.	600	$\Omega$
	SEC.	600	$\Omega$
Direct Current in Pri. (DCI)	maximum	0	mA
DC Resistance	PRI. Typ.	55	$\Omega$
	SEC. Typ.	68	$\Omega$
Insertion Loss	max., ref. 1 kHz	1.5	dB
Return Loss	min., 20 Hz	13	dB
Frequency Response	20 Hz to 20 kHz	$\pm 0.5$	dB
T.H.D.	typ. 20 Hz, 0 dBm	-55	dB
Isolation	minimum	2000	V <sub>DC</sub>
Longitudinal Balance		60	dB
Insulation Resistance	>100M $\Omega$ @500 VDC		

# AUDIO Transformer

## Schematic Diagram

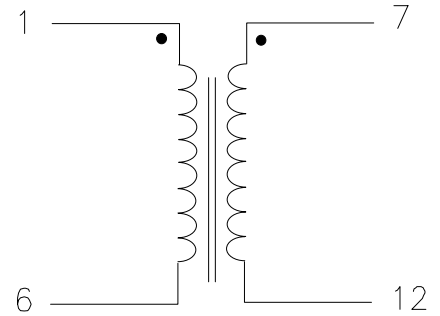

## Physical Dimensions inches (mm)

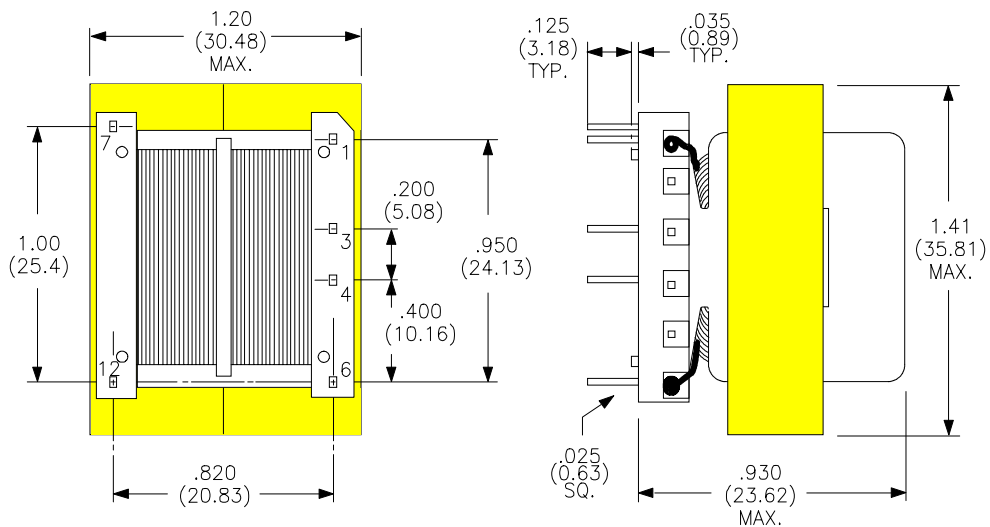

Unused pins omitted

RHOMBUS P/N: **T-931**

CUST P/N:

NAME:

DATE: **05/06/97**

SHEET: 1 of 1