


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

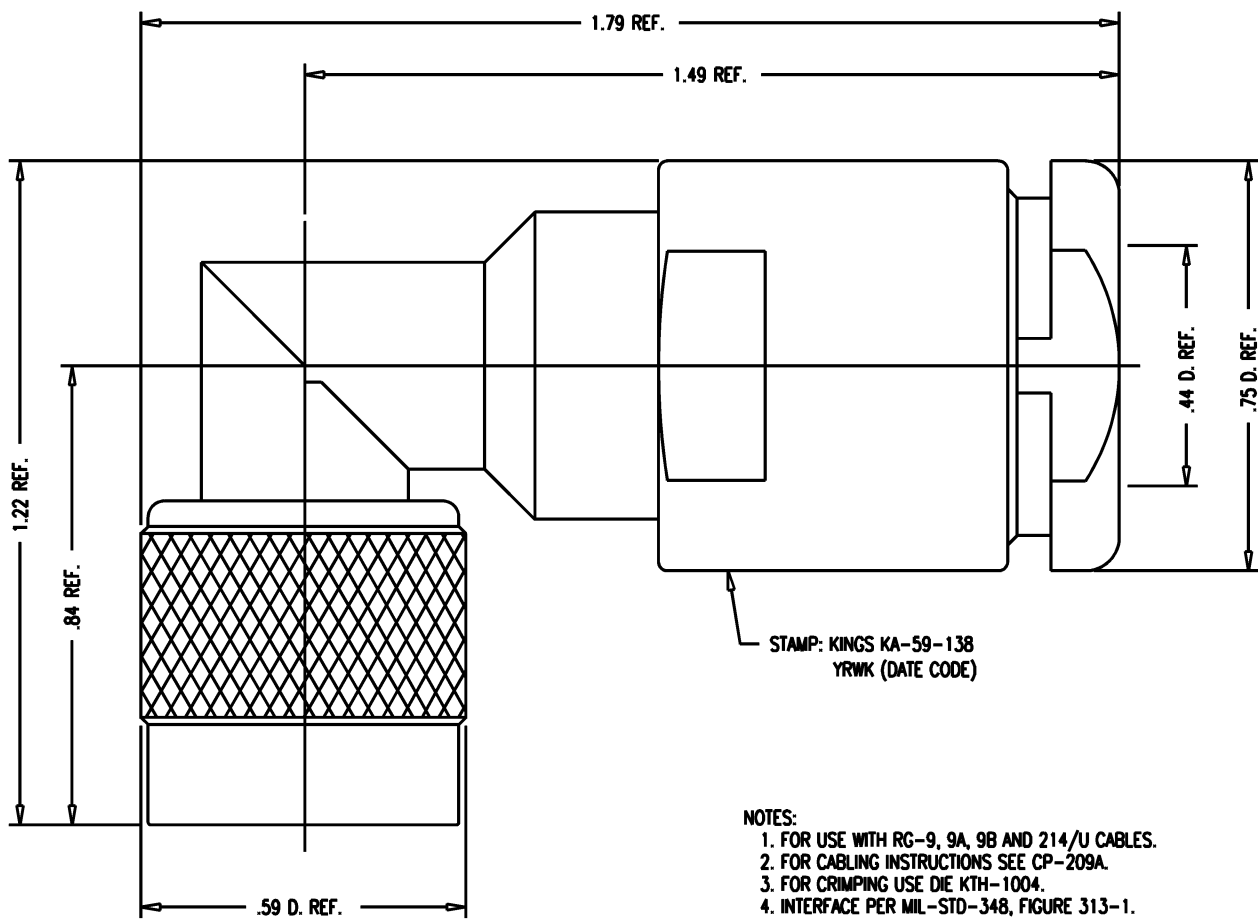

STAMP: KINGS KA-59-138  
YRWK (DATE CODE)

- NOTES:
1. FOR USE WITH RG-9, 9A, 9B AND 214/U CABLES.
  2. FOR CABLING INSTRUCTIONS SEE CP-209A.
  3. FOR CRIMPING USE DIE KTH-1004.
  4. INTERFACE PER MIL-STD-348, FIGURE 313-1.
  5. MATERIAL:  
INSULATORS: TEFLON, ASTM-D-4894  
GASKETS: SILICONE RUBBER, ZZ-R-765  
C-RING: PHOSPHOR BRONZE, ASTM-B-103  
WASHER: BER. COPPER, ASTM-B-194  
OUTER AND ANGLE CONTACT: BER. COPPER, ASTM-B-196  
ALL OTHER PARTS: BRASS, ASTM-B16
  6. FINISH:  
ALL METAL PARTS: SILVER PLATE PER QQ-S-365
  7. ELECTRICAL CHARACTERISTICS:  
NOMINAL IMPEDANCE: 50~W  
FREQUENCY RANGE: DC TO 11 GHz  
VOLTAGE RATING: 500 VOLTS RMS

# GSD

KA-59-138

REVISIONS	
ISSUE	CHANGES
5	CN 20549 C KOR 05/09/80
6	CN 38243 C BDH 03/05/01

QGS0441

SCALE:	4:1
APPROX SURFACE AREA	
USED ON	
REF:	
PLUG, TNC, ANGLE	
DRAWN	ME 08/18/95
DESIGN	MJB 08/19/95
APPR.	DATE

**KINGS**  
ELECTRONICS CO., INC.  
ROCK HILL, SOUTH CAROLINA 29730

KA-59-138

# GSD