



1. Dimensions:

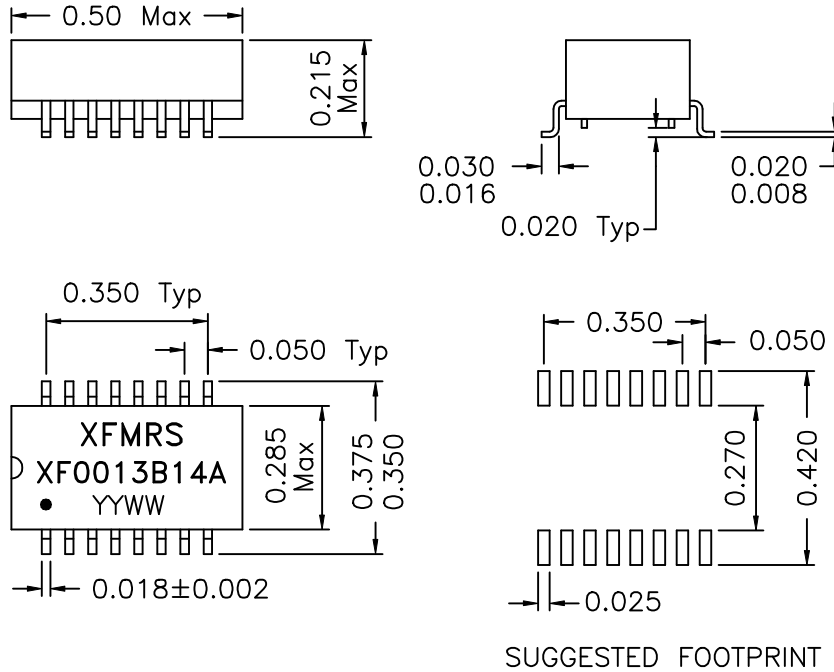

2. Schematic:

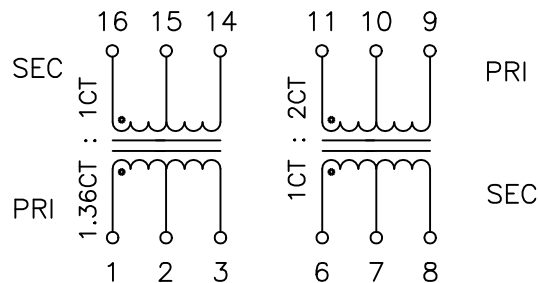

3. Electrical Specifications: @25°C

Isolation Voltage: 1500 Vrms

Turns Ratio: (16-14):(1-2-3)=1CT:1.36CT ±3%

(6-8):(11-10-9)=1CT:2CT ±3%

PRI OCL: Pins 1-3 & 11-9 1.2mH MIN. @100KHz 100mV

Cw/w: Pins 1-16 & 6-11 25pF MAX. @100KHz 100mV

PRI LL: 0.5uH MAX. @100KHz 100mV (SEC Shorted)

DC Res.: 0.700 Ohms Max (each wdg)

Long. Bal.: 35dB Min @1.544MHz

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Designed to meet UL1950 construction specifications (Basic).

DOC. REV: A/1

XFMRs Inc	Title: TRANSFORMER	
	UNLESS OTHERWISE SPECIFIED	P/N: XF0013B14A
TOLERANCES:	REV. A	
.xxx ±0.010	DWN. 李清儿	Mar-25-01
Dimensions in Inch	CHK. 孙怡	Mar-25-01
SCALE 2.5:1 SHT 1 OF 1	APP. Joe Huff	Mar-25-01