


Radial Leaded, Epoxy Dipped, Multilayer Ceramic Capacitors



RD Series

MERITEK

MERITEK Radial Leaded, Epoxy Dipped Multilayer Ceramic Capacitors are constructed with a moisture and shock resistant epoxy coating, and can be supplied in bulk or tape and reel packaging for automatic insertion in printed circuit boards. They have a wide range of applications in computers, data processors, telecommunication, industrial controls and instrumentation equipment, etc.

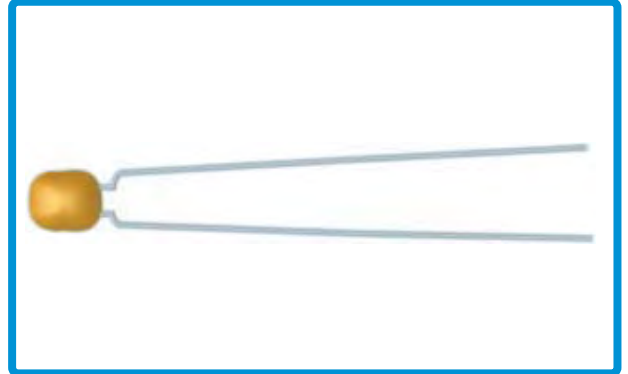

PART NUMBERING SYSTEM

	RD	15	YV	104	Z	500	RR
Meritek Series							
Size							
Dielectric							
CODE	CG	XR	YV				
	NPO	X7R	Y5V				
Capacitance Code							
CODE	101	223	104				
(pF)	100	22000	100000				
(μF)	--	0.022	0.1				
Tolerance							
CODE	J	K	M	Z			
	± 5%	±10%	±20%	+80% to -20%			
Rated Voltage							
CODE	500	101	201				
	50V	100V	200V				
Packaging							
CODE	Blank	RR					
	Bulk	Radial Leaded, Reel Package					

Lead Spacing	Size Code and Dimensions in mm (inches)	
2.5 ± 0.8 (.10 ± 0.032)	<p>RD15</p>	<p>RD20</p>
	<p>RD16</p>	<p>RD21</p>
5.0 ± 0.8 (.20 ± 0.032)	<p>RD30</p>	<p>Lead length can be cut upon customer's request.</p> <p>Standard cut lead lengths are: 3.3 ± 0.8 (.13 ± .03) 6.0 ± 1.0 (.24 ± .04) 10.0 ± 2.0 (.39 ± .08)</p>

Specifications are subject to change without notice.

Special lead styles available upon request.

Radial Leaded, Epoxy Dipped Multilayer Ceramic Capacitors

RD Series

MERITEK

PERFORMANCE SPECIFICATIONS

1.ELECTRICAL

DIELECTRIC CODE	EIA	NPO	X7R	Y5V
Temperature Characteristic		0 ±30ppm /°C, C > 20pF 0 +120/-40ppm /°C, C ≤ 20pF	ΔC ±15% maximum Over -55°C to +125°C	ΔC ±22%/82% maximum Over -30 °C to +85 °C
Operating Temperature Range		-55 °C to + 125 °C	-55 °C to +125 °C	-30 °C to +85 °C
Measuring Conditions for Capacitance and D.F.		1 MHz, 1 Vrms, C < 1000pF	1 KHz, 1 Vrms	1 KHz, 0.5 Vrms
Dissipation Factor (D.F.) and Tangent of Loss Angle (tan δ)		≤ 0.1%	≤ 2.5%	≤ 5.0%
Insulation Resistance (I.R.) after 60 secs, charging at rated voltage, 25°C, 55% RH max.		≥ 100G ohms or ≥ 1000MμF Whichever is less	≥ 100G ohms or ≥ 1000MμF Whichever is less	≥ 10G ohms or ≥ 1000MμF Whichever is less
Voltage Proof 25°C, 1-5 secs		2.5 x Rated Voltage	2.5 x Rated Voltage	2.5 x Rated Voltage
Capacitance Aging		0	2.5% per decade hour	7% per decade hour

2.ENVIROMENTAL

Test	Test Condition	Post-Test Inspection Requirements			
Solderability	Solder 60Sn/40Pb, 235 ±5°C Immersion 2 ±0.5 sec. Depth of Immersion: 1.5 – 2.0mm	At least 95% of leads should be well tinned			
Resistance to Soldering Heat	Immersion in solder bath at 260 ±5°C for 10 ±1 sec. Recovery: 24 ±2 hrs. (NPO) 48 ±4 hrs. (X7R, Y5V)	No visible damage.			
			NPO	X7R	Y5V
		ΔC / °C	≤ ±5%	±10%	±20%
Rapid Change Of Temperature	-55 to +125°C (NPO, X7R) -25 TO +85°C (Y5V) 5 cycles, duration : 30 mins. Recovery: 24 ±2 hrs. (NPO) 48 ±4 hrs. (X7R, Y5V)	No visible damage			
Endurance	1000 hrs. at maximum temperature with 1.5 x rated voltage applied Recovery: 24 ±2 hrs. (NPO) 48 ±4 hrs. (X7R, Y5V)	No visible damage			
			NPO	X7R	Y5V
		ΔC / °C	≤ ±2%	≤ ±20%	≤ ±30%
		DF	≤ 0.3%	≤ 5%	≤ 10%
		IR	R.C > 25S		

3.Capacitance Range

SIZE	NPO	X7R	Y5V
RD15, RD16	10pF to 1000pF	1000pF to 0.1μF	8200pF to 0.1μF
RD20, RD21		0.1μF to 1.0μF	0.15μF to 1μF