


MATERIALS

| | |
|------------------|----------------------------|
| BODY | PASSIVATED STAINLESS STEEL |
| CONTACT | GOLD PLATED |
| INSULATOR | PTFE |
| | |

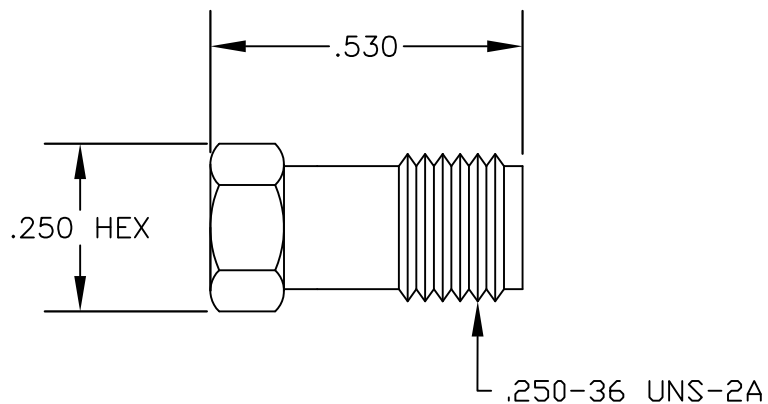

SPECIFICATIONS

IMPEDANCE: 50 OHMS
 WITHOUT CHAIN
 FREQUENCY RANGE: DC TO 12.4 GHz
 POWER HANDLING CAPABILITY: 1/2 WATT
 MAXIMUM VSWR: 1.17



PASTERNAK ENTERPRISES, INC.
 P.O BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451
 WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

| | | | | | |
|---------------|----------------|---|-----------|--------|-----|
| DWG TITLE | | DES. SMA FEMALE TERMINATION DC-12.4 GHz | | | |
| PE6003 | | | | | |
| REV. A | FSCM NO. 53919 | CAD FILE 070610 | SCALE N/A | SIZE A | 127 |

- NOTES:**
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES.