
Speaker Sound Generators - Micro Speaker

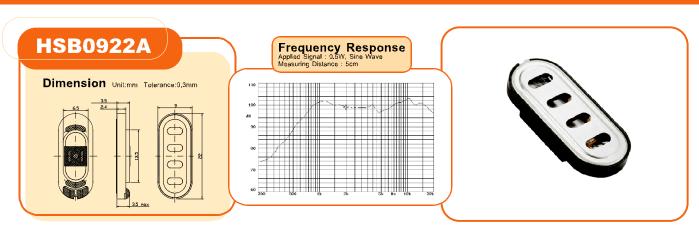


Specification (all data taken at 25°C unless otherwise specified)


Model	Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	★Frequency Range (Hz)	★Sound Output at 1kHz (dB)	Operating Temperature (°C)	Storage Temperature (°C)
HSB0922A-8	8 ± 15%	0.5	1	850 ± 150	850 ~ 20000	99 ± 2	-20 ~ +70	-40 ~ +85

The specifications are only for 8Ω version. Specification for other impedance is available upon request.

★ Value normalized to 0.5W input power and 5cm measuring distance.









Specification (all data taken at 25°C unless otherwise specified)

· · · · · · · · · · · · · · · · · · ·										
Model	Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	★Frequency Range (Hz)	★Sound Output at 1kHz (dB)	Operating Temperature (°C)	Storage Temperature (°C)		
HSB10B-8	8 ± 15%	0.3	0.5	1050 ± 200	1050 ~ 20000	85 ± 3	-30 ~ +70	-40 ~ +85		

The specifications are only for 8Ω version. Specification for other impedance is available upon request. \star Value normalized to 0.3W input power and 10cm measuring distance.







Specification (all data taken at 25°C unless otherwise specified)

Model	Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	★Frequency Range (Hz)	★Sound Output at 1kHz (dB)	Operating Temperature (°C)	Storage Temperature (°C)
HSB1018B-8	8 ± 20%	0.5	0.7	1200 ± 15%	1200 ~ 20000	78 ± 3	-40 ~ +70	-40 ~ +70

The specifications are only for 8Ω version. Specification for other impedance is available upon request. \star Value normalized to 1W input power and 1m measuring distance.