

1T1G - 1T7G

1.0 AMP. Glass Passivated Rectifiers


TS-1

Features

- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability
- ✧ 3mm miniature body
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode.

Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode end
- ✧ High temperature soldering guaranteed: 260°C/10 seconds/.375" (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ✧ Weight: 0.20 grams

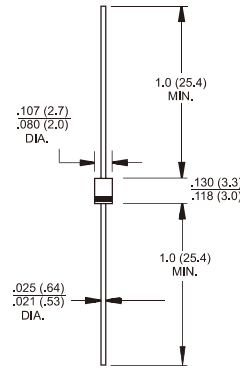

Dimensions in inches and (millimeters)

Marking Diagram



1TXG = Specific Device Code
 G = Green Compound
 Y = Year
 M = Work Month

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

Type Number	Symbol	1T1G	1T2G	1T3G	1T4G	1T5G	1T6G	1T7G	Units
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375 (9.5mm) Lead Length @T _A = 50 °C	I _{F(AV)}	1.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	30							A
Maximum Instantaneous Forward Voltage @ 1.0A	V _F	1.1	1.0					V	
Maximum DC Reverse Current at @ T _A =25 °C Rated DC Blocking Voltage (Note 1) @ T _A =125 °C	I _R	5.0					100		uA uA
Typical Junction Capacitance (Note 3)	C _j	10							pF
Typical Thermal Resistance (Note 2)	R _{θJA}	100							°C/W
Operating Temperature Range	T _J	-65 to +150							°C
Storage Temperature Range	T _{STG}	-65 to +150							°C

Notes: 1. Pulse Test with PW=300 usec,1% Duty Cycle
 2. Mount on Cu-Pad Size 5mm x 5mm on P.C.B.
 3. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.

RATINGS AND CHARACTERISTIC CURVES (1T1G THRU 1T7G)

