


SD

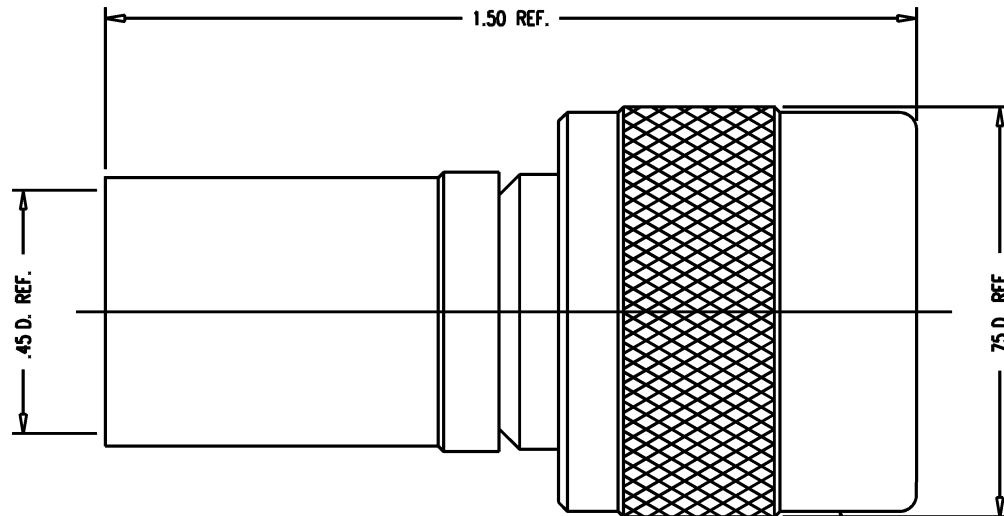

STAMP: KINGS KD-59-180 M06
YRWK (DATE CODE)

NOTES:

1. FOR USE WITH RG-393/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-5402.
3. FOR CRIMPING USE DIE KTH-2105.
4. INTERFACE PER MIL-STD-348, FIG. 302-1.
5. CONTACT TO BE SUPPLIED UNASSEMBLED.
6. MARK PACKAGE: KINGS KD-59-180 M06
YRWK (DATE CODE)
7. MATERIALS:
INSULATOR: TEFLON, ASTM-D-4894
GASKET: SIL. RUB., ZZ-R-765
K-GRIP SLEEVE: COM. BRONZE ASTM-B-140
OUTER CONTACT }
SPRING WASHERS } BER. COP., ASTM-B-196
ALL OTHER PARTS: BRASS, ASTM-B16
8. FINISHES:
CENTER CONTACT: GOLD PLATE PER MIL-G-45204
OUTER CONTACT & SPRING WASHER: SILVER PLATE PER QQ-S-365
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
9. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50Ω
FREQUENCY RANGE: DC TO 11 GHz
VOLTAGE RATING: 1000 VOLTS RMS

SD

KD-59-180 M06

REVISIONS

ISSUE	CHANGES
4	CN 36332 C REDRAWN ME 05/25/95
5	CN 37536 C MRM 01/21/98
6	CN 38005 A TML 05/15/00

KD59180C

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, C

DRAWN	ME	DATE	05/24/95
DESIGN	MJB	DATE	05/26/95
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

KD-59-180 M06