


400 W, C-Band Helix TWT Series

400 Watt, 5.85 - 6.425 GHz, CW traveling wave tube, coaxial input, waveguide output, air cooled.

Custom configurations are also available. These variations in the performance and configuration include: mechanical configuration, electrical and RF connections, and dual-stage depressed collector.

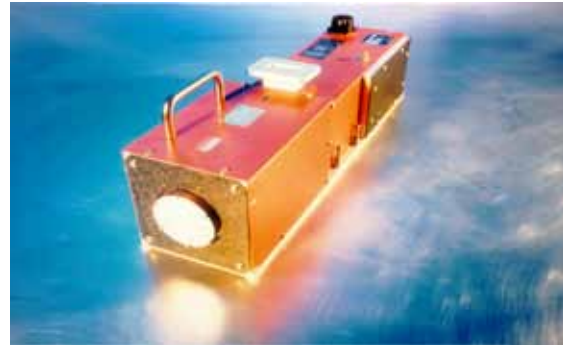

FEATURES

- 400 Watt
- 5.85 GHz - 6.425 GHz
- Coaxial Input
- Waveguide Output
- Weight: 16 lbs.
- Air Cooled

MODEL	FREQUENCY (GHZ)	POWER OUTPUT (MIN)
VTC-6361H1	5.85 - 6.425	400 W

TYPICAL OPERATING PARAMETERS				
	MAXIMUM	MINIMUM	TYPICAL	UNITS
Filament Voltage:	6.6	6.0	---	Vdc
Filament Current:	5.0	---	---	A
Helix Voltage:	9.6	8.6	---	kV
Helix Current:	20.0	---	---	mAdc
Collector Voltage:	6.4	4.6	---	kVdc
Filament Warm-up Time:	---	3.0	---	Minutes
Drive Power:	20	---	---	mW
Load VSWR:	1.7:1	---	---	VSWR
Air Flow:	---	360	---	lb/hr

The values listed above represent specified limits for the product and are subject to change. The data should be used for basic information only. Formal, controlled specifications may be obtained from CPI for use in equipment design.



For information on this and other CPI products, visit our website at: www.cpii.com,

or contact: CPI MPP Division, 607 Hansen Way, Palo Alto, CA 94303

TELEPHONE: 1(800) 414-8823. FAX: (650) 856-0705 | EMAIL: marketing@cpii.com