

FEATURES AND SPECIFICATIONS

Features and Benefits

- LFH™ (Low Force Helix) rugged contacts offer increased cycle life, mechanical reliability and optimal signal integrity
- Supports up to 1.65 Gbps bandwidth per differential pair for a total of 9.9 Gbps
- Fully shielded against RFI/EMI
- Grounding detents on mating shell
- Positive retention jackscrew: thread 4-40 UNC-2A

Reference Information

Product Specification: PS-74320-001

Packaging: Bag

Mates With: 74320 receptacles

Designed In: Millimeters

Electrical

Voltage: 40V

Current: 1.5A

Dielectric Withstanding Voltage: 500V

Insulation Resistance: 1000 MΩ min.

Mechanical

Mating Force: 10.0 lbf (4.5kgf) max.

Unmating Force: 2.2 lbf (1.0kgf) min.


Durability: 100 cycles

molex® **MicroCross™ DVI**


Digital Visual Interface Shielded I/O Cable Assembly

88741

DVI-Digital to DVI-Digital Dual Link

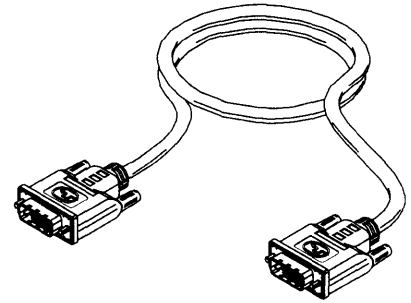

CATALOG DRAWING (FOR REFERENCE ONLY)

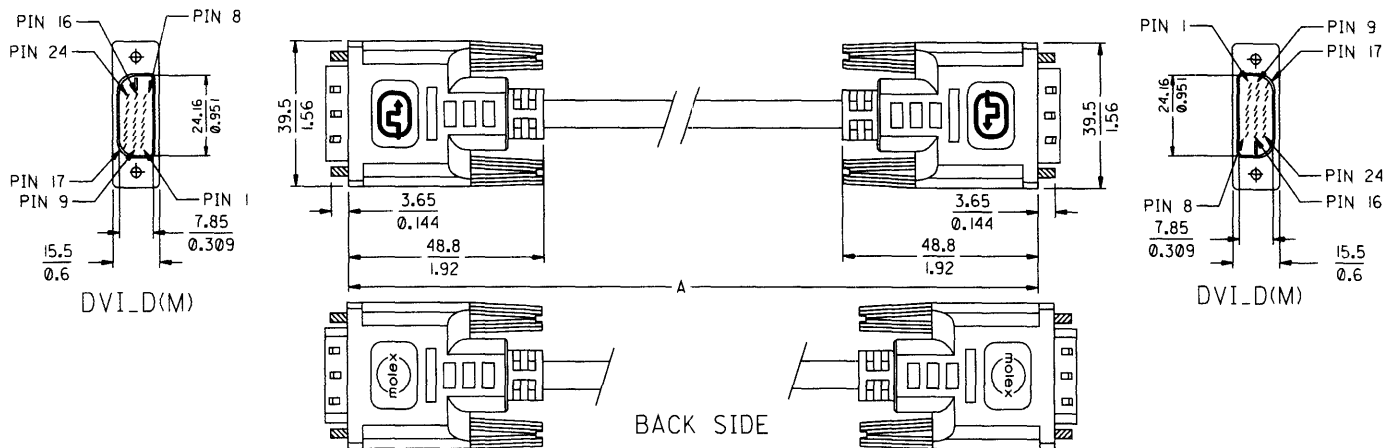

ORDERING INFORMATION AND DIMENSIONS

Order No.	Dimension A	Color
88741-8100	2m (6.56ft)	Black
88741-8110	3m (9.84ft)	Black
88741-8120	5m (16.40ft)	Black
88741-8101	2m (6.56ft)	White
88741-8111	3m (9.84ft)	White
88741-8121	5m (16.40ft)	White