

15x15x4 Ceramic Patch Antenna (Standard)

1. Explanation of Product Number

| | | | | | | | | | | | | | |
|---|---|---|---|-----|-----|-----|-----|-----|-----|---|---|---|---|
| H | 2 | P | 1 | 3 | E | A | C | A | F | 0 | 1 | 0 | 0 |
| | | | | (1) | (2) | (3) | (4) | (5) | (6) | | | | |



Product Code:

(1) Product Categories:

3: ceramic patch antenna

(2) Dimensions and Polarization:

EA: 15x15x04(mm)/right hand circular polarization

(3) Material:

C: MA-FL

(4) Working Frequency:


A: 1575.42MHz

(5) Ground Plane Dimensions:

F: 30x30(mm)

(6) Antenna Series:

01: serial number

| | | | | |
|---|--------------------------|---|-----------------------|------------------|
| Tolerances (Unless otherwise specified) X : ± 1 X.X : ± 0.1 X.XX : ± 0.01 Angle : ± Hole Dia. : ± | |  Unictron Technologies Corporation Website: www.unictron.com | | |
| Scale : | Unit : mm | 2010-08-04 | | |
| Prepared By : Wiliu | Checked By : Chinling | THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION | | |
| Designed By : Chinling | Approved By : Herbert | | | |
| TITLE : 15*15*4 Ceramic Patch Antenna (Standard) | | DOCUMENT NO. | H2P13EACAF0100 | REV. B |

2. Features

- *Stable and reliable in performances
- *Low temperature coefficient of frequency
- *Compact size
- *RoHS compliance

3. Applications

- *Navigation systems or position tracking systems
- *Hand-held devices when GPS function is needed, e.g., PDA, Smart phone, PND.

4. Description

Unictron's patch antenna series are ceramic antennas specially designed for GPS application. This ceramic patch antenna has excellent stability and sensitivity through the use of high performance proprietary ceramic materials and processes.

5. Electrical Specifications (30x30(mm) ground plane)

| Characteristics | | Specifications | Unit |
|--------------------------------------|----------------|-----------------------------|--------|
| Outline Dimensions | | 15×15×4 | mm |
| Ground Plane | | 30×30 | mm |
| Center Frequency* | | 1578±2 | MHz |
| Bandwidth (under -10dB return loss) | | 5 min. | MHz |
| VSWR | | 1.5 max. | |
| Impedance | | 50 | Ω |
| Polarization | | RHCP | |
| Gain | @Zenith | 0.5 (typical) | dBic |
| | @10° Elevation | -5.5 (typical) | |
| Axial Ratio | | 3 (typical) | dB |
| Temperature Coefficient of Frequency | | 0±20 max (@ -20°C ~80°C) | ppm/°C |

*Center frequency will be offset to working frequency according to the conditions of user's ground plane and radome.

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : ± Hole Dia. : ±



Unictron Technologies Corporation
Website: www.unictron.com

Scale : Unit : mm

Prepared By : Wiliu Checked By :
Chinling

Designed By : Chinling Approved By :
Herbert

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION


**TITLE : 15*15*4 Ceramic Patch Antenna
(Standard)**

**DOCUMENT
NO.**

H2P13EACAF0100


**REV.
B**

6. Antenna Dimensions (unit: mm)

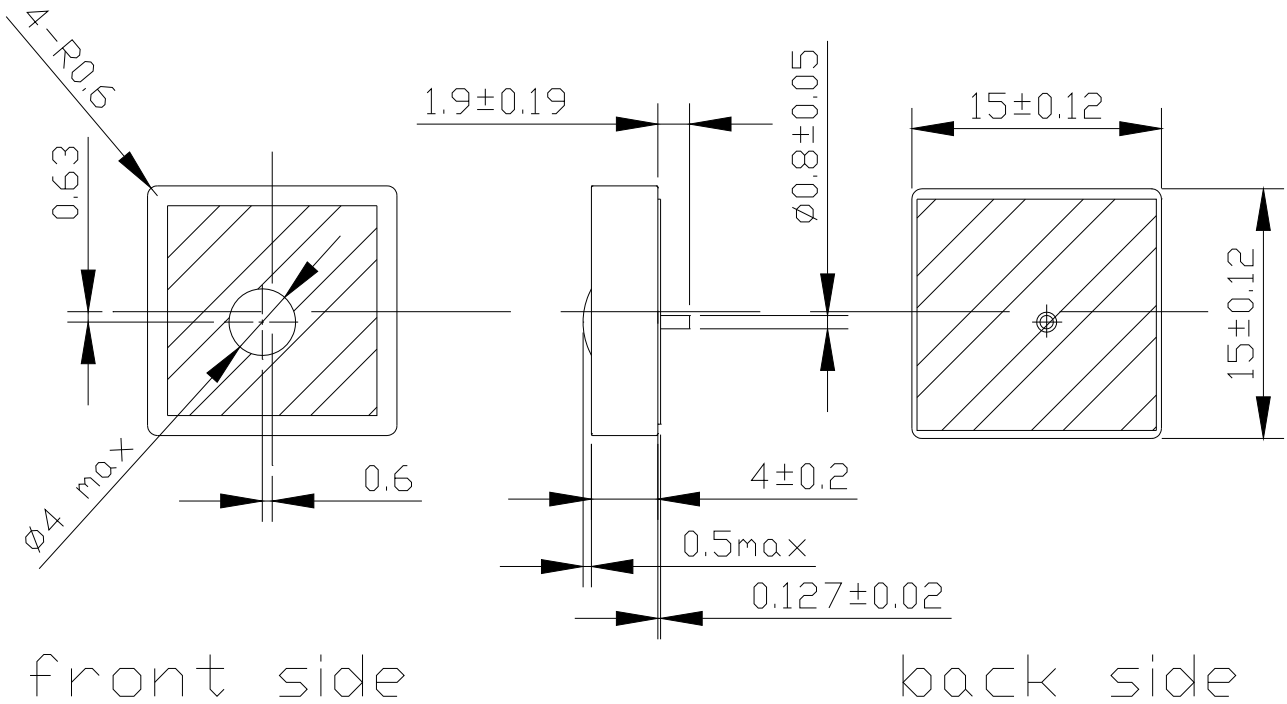


7. Electrical Characteristics (30x30(mm) ground plane)

Return Loss(S_{11})

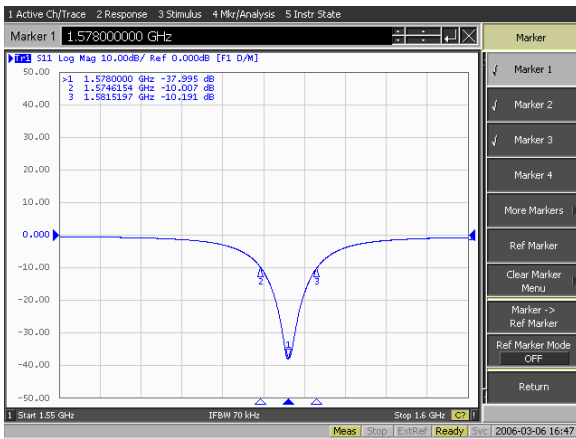

Smith Chart

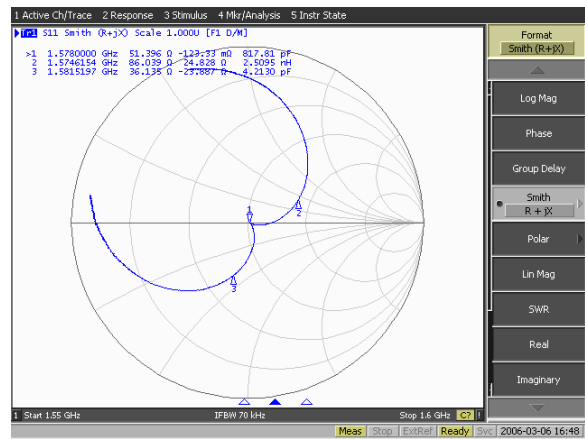

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : \pm Hole Dia. : \pm



Unictron Technologies Corporation
Website: www.unictron.com

Scale : Unit : mm

Prepared By : Wiliu Checked By : Chinling

Designed By : Chinling Approved By : Herbert

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE : 15*15*4 Ceramic Patch Antenna (Standard)


DOCUMENT NO.

H2P13EACAF0100


REV.

B

8. Axial Ratio (30x30(mm) ground plane)

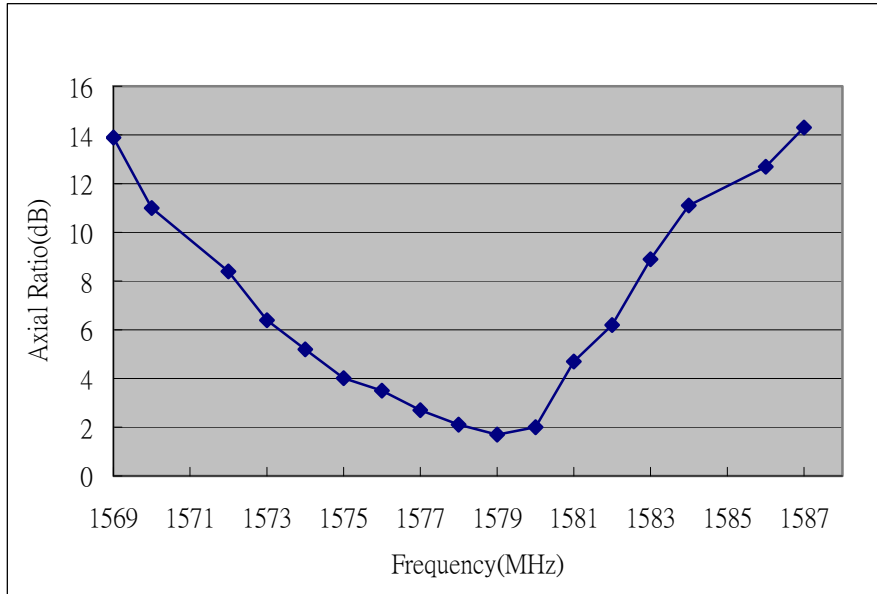

9. Gain vs. Ground Plane Size

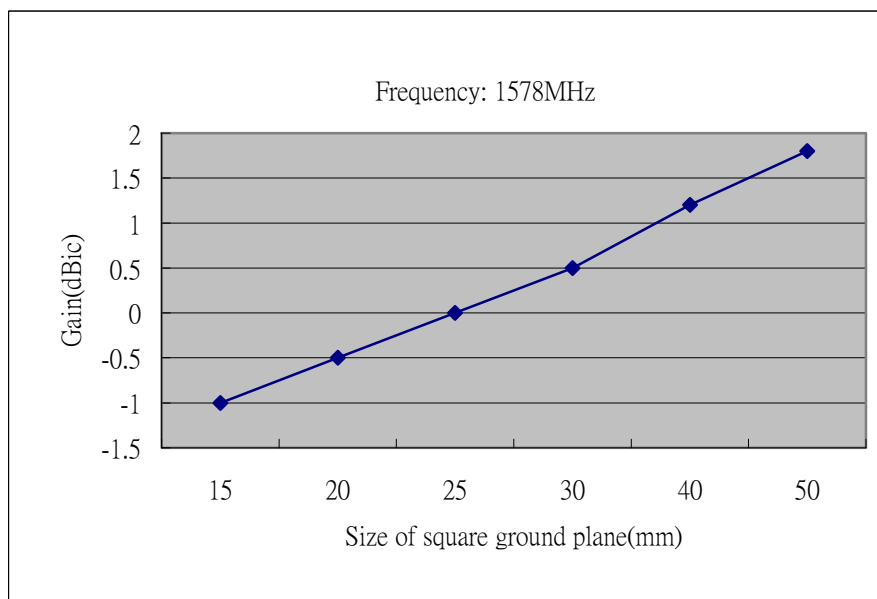

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : ±

Hole Dia. : ±



Unictron Technologies Corporation

Website: www.unictron.com

Scale :

Unit : mm

2010-08-04

Prepared By : Wiliu

Checked By :
Chinling

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

Designed By : Chinling

Approved By :
Herbert

**TITLE : 15*15*4 Ceramic Patch Antenna
(Standard)**

**DOCUMENT
NO.**


H2P13EACAF0100

REV.


B

10. Radiation Pattern (30x30(mm) ground plane)


0°

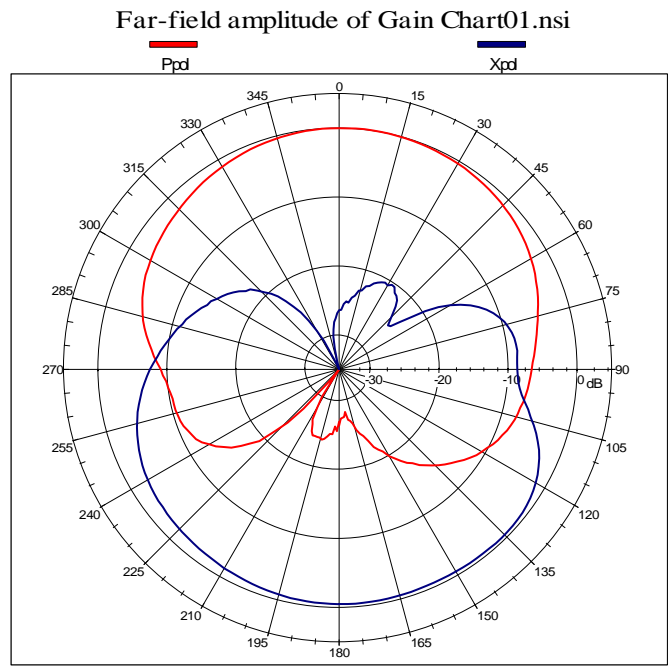

90°

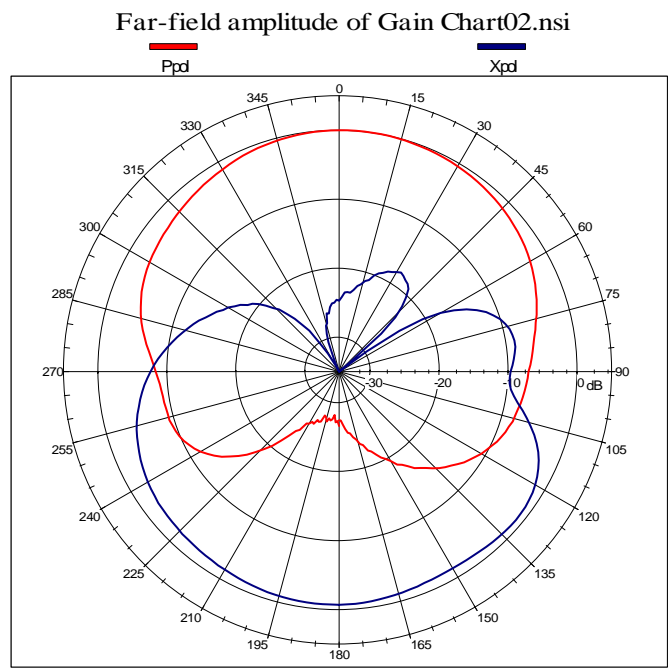

Right hand circular polarized signal $f_0=1578\text{MHz}$

| | | | |
|---|--------------------------|---|--|
| Tolerances (Unless otherwise specified) X : ± 1 X.X : ± 0.1 X.XX : ± 0.01 Angle : ± Hole Dia. : ± | |  Unictron Technologies Corporation Website: www.unictron.com | 2010-08-04 THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION |
| Scale : | Unit : mm | | |
| Prepared By : Wiliu | Checked By : Chinling | | |
| Designed By : Chinling | Approved By : Herbert | | |
| TITLE : 15*15*4 Ceramic Patch Antenna (Standard) | | DOCUMENT NO. | H2P13EACAF0100 |
| | | REV. B | |