

DUAL SCHOTTKY RECTIFIERS

REVERSE VOLTAGE: 20 - 60 V

FORWARD CURRENT: 15 A


FEATURES

- ◇ Metal-Semiconductor junction with guard ring
- ◇ Epitaxial construction
- ◇ For use in low voltage,high frequency inverters free wheeling,and polarity protection applications
- ◇ Low forward voltage drop,low switching losses
- ◇ High surge capability
- ◇ The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

- ◇ Case:JEDEC TO--220AB,molded plastic
- ◇ Terminals: Plated leads, solderable per MIL-STD-202, Method 208
- ◇ Polarity: As marked
- ◇ Weight: 0.08 ounce, 2.24 grams
- ◇ Mounting position: Any

TO-220AB

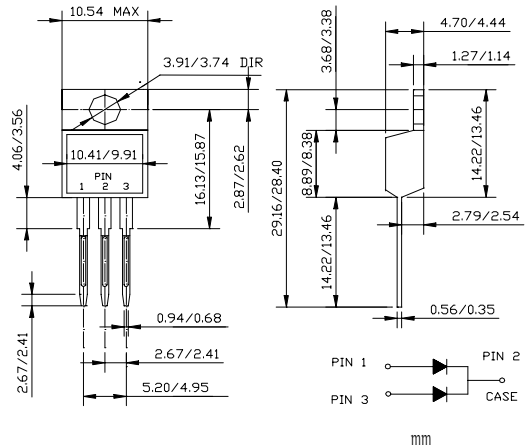

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase,half wave,60 Hz,resistive or inductive load. For capacitive load,derate by 20%.

		SR 1520CT	SR 1530CT	SR 1540CT	SR 1550CT	SR 1560CT	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	20	30	40	50	60	V
Working peak reverse voltage	V _{RMS}	14	21	28	35	42	V
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	V
Maximum average forward rectified current @ T _A =100°C	I _{F(AV)}	15.0					A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method) @T _A =125°C	I _{FSM}	200.0					A
Maximum instantaneous forward voltage per leg @ 7.5A (Note1)	V _F	0.65			0.75		V
Maximum reverse current @T _A =25°C at rated DC blocking voltage @T _A =100°C	I _R	1.0 50.0					mA
Operating junction temperature range	T _J	-55 --- +150					°C
Storage temperature range	T _{STG}	-55 --- +150					°C

Note: 1. Pulse test:300us pulse width,1% duty cycle.

www.galaxycn.com

FIG.1 -- FORWARD CURRENT DERATING CURVE

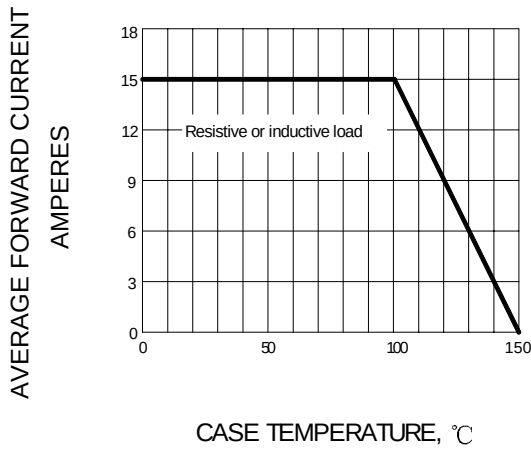


FIG.2 -- TYPICAL REVERSE CHARACTERISTICS PER LEG

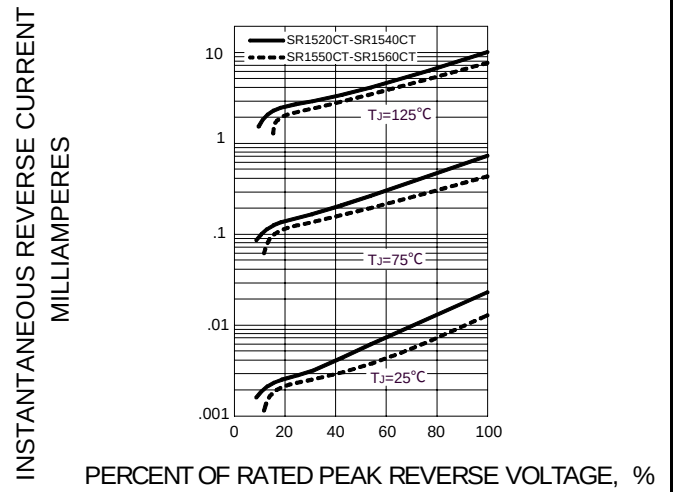


FIG.3 -- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

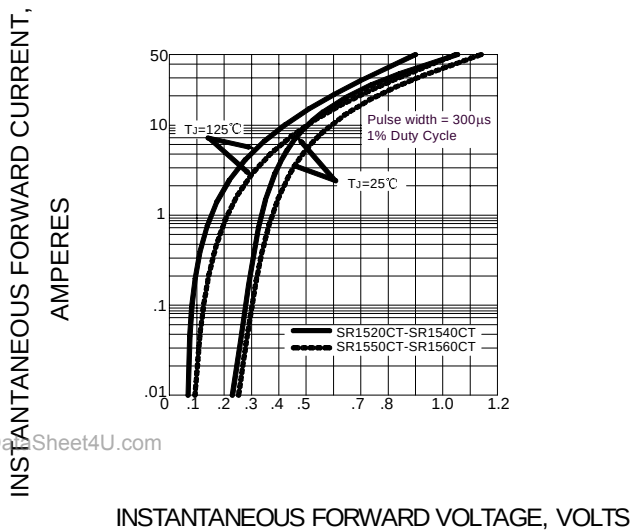


FIG.4 -- PEAK FORWARD SURGE CURRENT

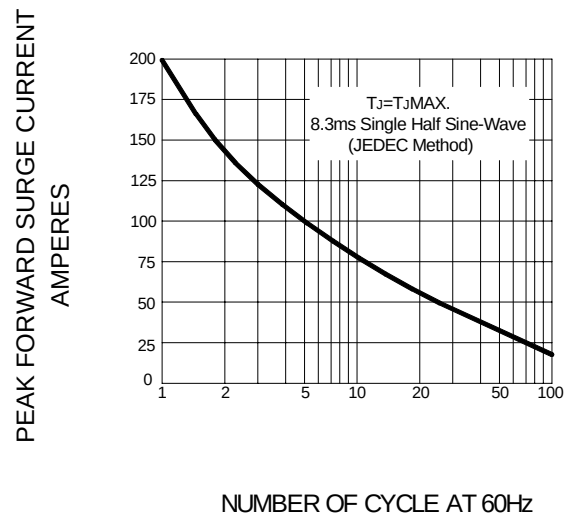


FIG.5 -- TYPICAL JUNCTION CAPACITANCE

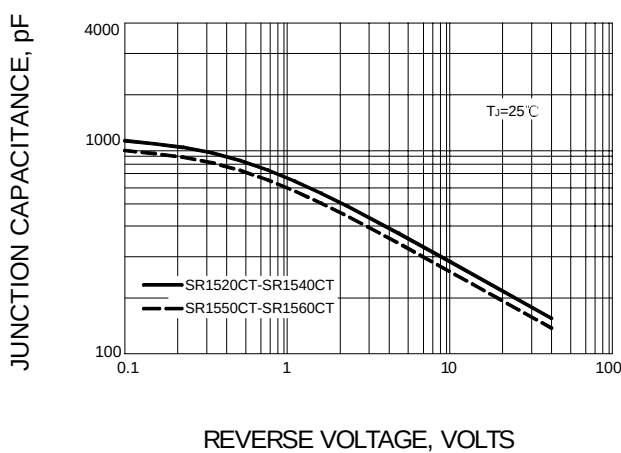


FIG.6 -- TYPICAL TRANSIENT THERMAL IMPEDANCE

