

DL50 • DLM60 • DLV68

MINI THROUGH BEAM SENSOR
with separate amplifier

- ◉ high range
- ◉ high power reserve
- ◉ highly flexible connecting cable
- ◉ robust design



• Ø 5 mm x 13 mm • Stainless steel • f. gluing and clamping fixture	DL50  Actual size
• M6 x 0,5 mm x 13 mm • Nickel-plated brass • f. screw-in fixture	DLM60  Actual size
• 6 mm x 8 mm x 12 mm • Nickel-plated brass • f. screw-in fixture	DLV68  Actual size

GENERAL TECHNICAL DATA




light type	Red 660nm or Infrared 880nm
connection type	PUR-cable with connector
temperature range	-10°C to +55°C
protection class	IP 65

SMALLEST OBJECT and SENSING DISTANCE


sensing distance	4000 mm
smallest object (Ø copper wire)*	0,4 mm

*copper wire of infinite length

DIMENSIONS

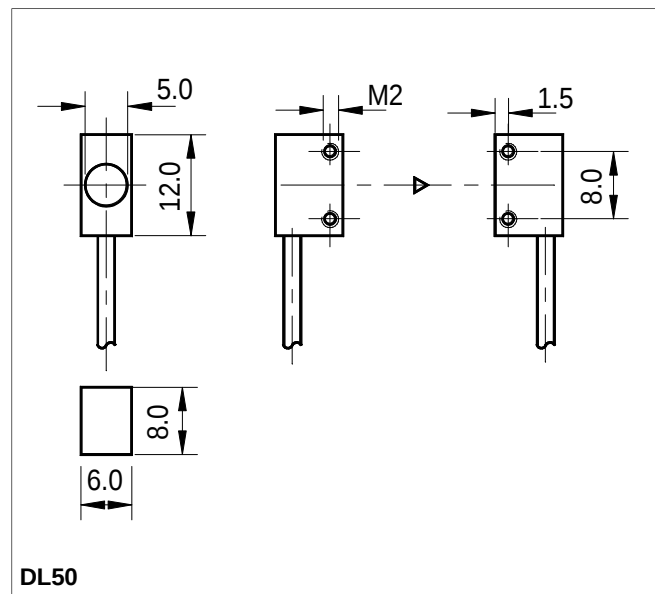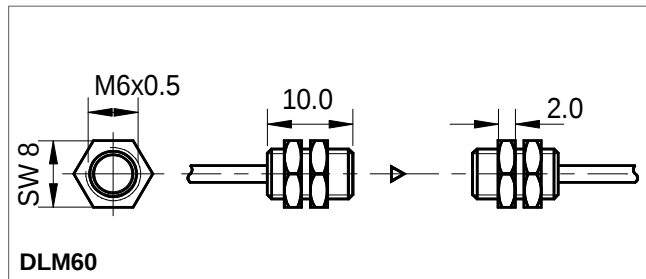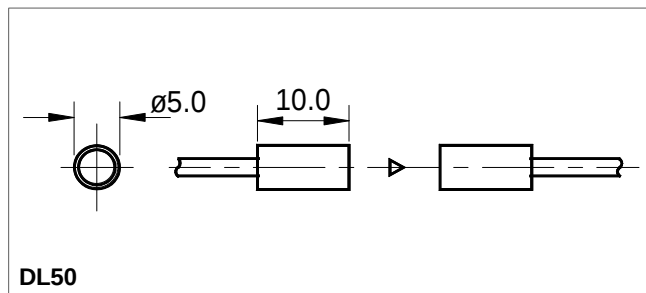

PART DESIGNATION

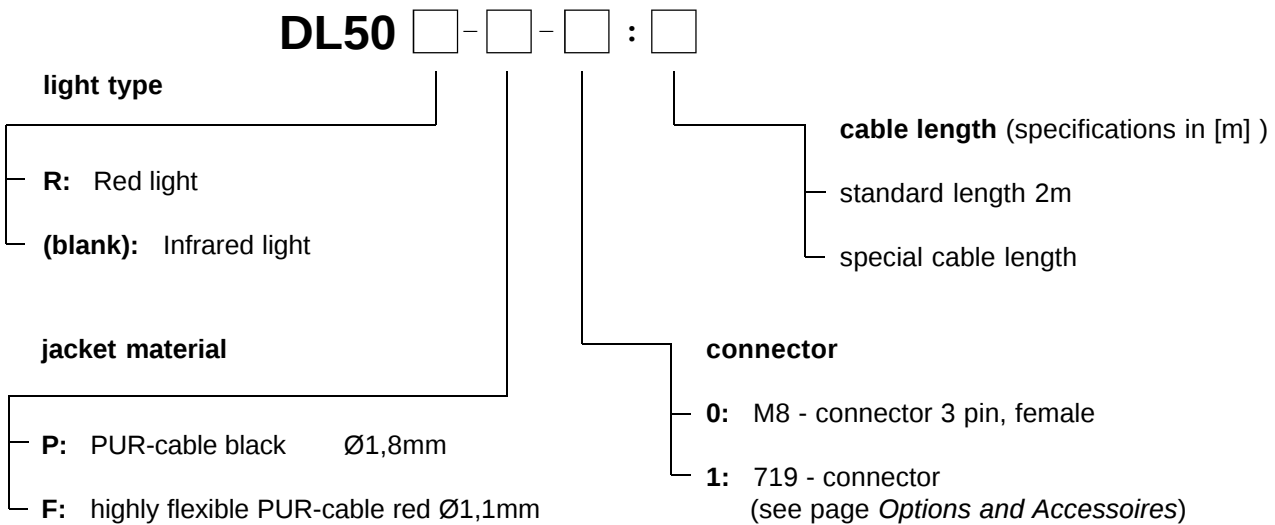

ORDER EXAMPLE:

DL50R-P-0:1m = DL50 Red light - PUR-cable black - M8, 3 pin female: (cable length 2m x 2)

Please remember, for correct operation, a separate amplifier is required.