

**ADJUSTABLE PRECISION  
ZENER SHUNT REGULATOR**  
**ISSUE 3 DECEMBER 1997**

**ZR2431**

**DEVICE DESCRIPTION**

The ZR2431 is a three terminal adjustable shunt regulator offering excellent temperature stability and output current handling capability up to 25mA. The output voltage may be set to any chosen voltage between 1.24 and 15 volts by selection of two external divider resistors.

The devices can be used as a replacement for zener diodes in many applications requiring an improvement in zener performance.

The ZR2431 is particularly used in the feedback control loop of switch mode power supplies. In this application the device 1.24 volt reference enables the generation of low voltage supplies, typically 3.3 volts or 3 volts.


**FEATURES**

- Surface mount SOT23, SOT223, SOT89 and SO8 packages
- TO92 package
- 2.5% and 1% tolerance
- Maximum temperature coefficient 52 ppm/ $^{\circ}\text{C}$
- Temperature compensated for operation over the full temperature range
- Programmable output voltage
- 100 $\mu\text{A}$  to 25mA current sink capability
- Low output noise

**APPLICATIONS**

- Shunt regulator
- Series regulator
- Voltage monitor
- Over voltage/ under voltage protection
- Switch mode power supplies

**SCHEMATIC DIAGRAM**

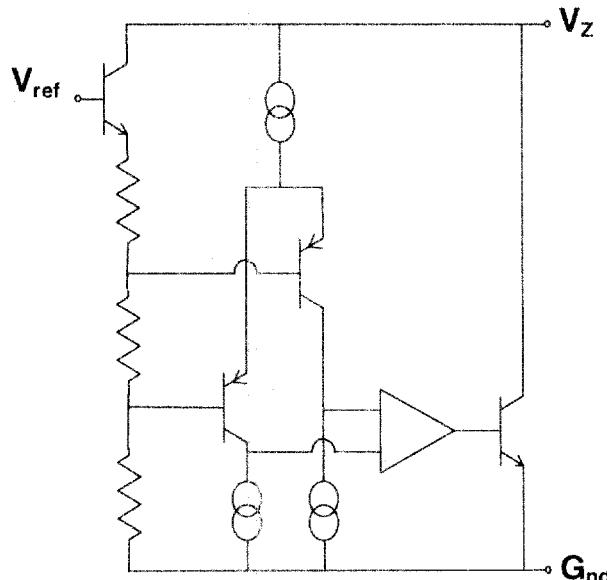

**ZR2431**

### ABSOLUTE MAXIMUM RATING

Cathode Voltage (Vz)	15V
Cathode Current	50mA
Operating Temperature	-40 to 85°C
Storage Temperature	-55 to 125°C
<b>Recommended Operating Conditions</b>	
Min	Max
Cathode Voltage	VREF 15V
Cathode Current	100µA 25mA

### Power Dissipation (T<sub>amb</sub>=25°C, T<sub>jmax</sub>=150°C)

SOT23	330mW
SOT223	2W
SO8	780mW
TO92	780mW
SOT89	1.5W

### ELECTRICAL CHARACTERISTICS

TEST CONDITIONS (Unless otherwise stated): T<sub>amb</sub>=25°C

PARAMETER	SYMBOL	VALUE			UNITS	CONDITIONS
		MIN	TYP	MAX		
Reference Voltage 2.5% 1.0%	V <sub>ref</sub>	1.209 1.228	1.24 1.24	1.271 1.252	V	I <sub>L</sub> =10mA (Fig1), V <sub>Z</sub> =V <sub>ref</sub>
Deviation of Reference Input Voltage over Temperature	V <sub>dev</sub>		4.0	8.0	mV	I <sub>L</sub> =10mA, V <sub>Z</sub> =V <sub>ref</sub> T <sub>a</sub> =full range (Fig1)
Ratio of the change in Reference Voltage to the Change in Cathode Voltage	$\frac{\Delta V_{ref}}{\Delta V_Z}$		0.5	2.0	mV/V	V <sub>Z</sub> from V <sub>ref</sub> to 10V I <sub>Z</sub> =10mA (Fig2)
Reference Input Current	I <sub>ref</sub>	0.02	0.11	0.4	µA	R <sub>1</sub> =10k, R <sub>2</sub> =O/C, I <sub>L</sub> =10mA (Fig2)
Deviation of Reference Input Current over Temperature	$\Delta I_{ref}$		0.02	0.2	µA	R <sub>1</sub> =10k, R <sub>2</sub> =O/C, I <sub>L</sub> =10mA T <sub>a</sub> =full range (Fig2)
Minimum Cathode Current for Regulation	I <sub>Zmin</sub>		30	100	µA	t
Off-state Current	I <sub>Zoff</sub>		10	30	µA	V <sub>Z</sub> =15V, V <sub>ref</sub> =0V (Fig3)
Dynamic Output Impedance	R <sub>Z</sub>		0.25	2	Ω	V <sub>Z</sub> =V <sub>ref</sub> (Fig1), f=0Hz, I <sub>L</sub> =10mA

Deviation of reference input voltage, V<sub>dev</sub>, is defined as the maximum variation of the reference input voltage over the full temperature range.

The average temperature coefficient of the reference input voltage, V<sub>ref</sub>, is defined as:

$$V_{ref} (\text{ppm}/^\circ\text{C}) = \frac{V_{dev} \times 1000000}{V_{ref} (T_1 - T_2)}$$


The dynamic output impedance, R<sub>Z</sub>, is defined as:

$$R_Z = \frac{\Delta V_Z}{\Delta I_Z}$$

When the device is programmed with two external resistors, R<sub>1</sub> and R<sub>2</sub>, (fig 2) , the dynamic output impedance of the overall circuit, R', is defined as:


$$R' = R_Z \left( 1 + \frac{R_1}{R_2} \right)$$

t With a capacitance of greater than 100pF between cathode and anode, minimum cathode current must be 0.2mA.

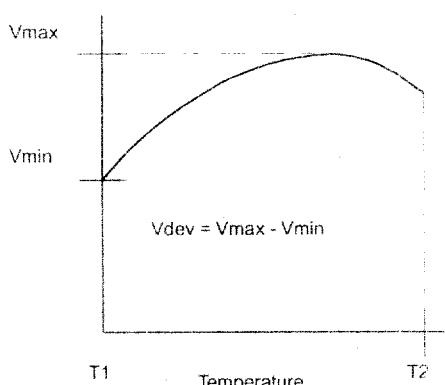


**ZR2431**


## TYPICAL CHARACTERISTICS

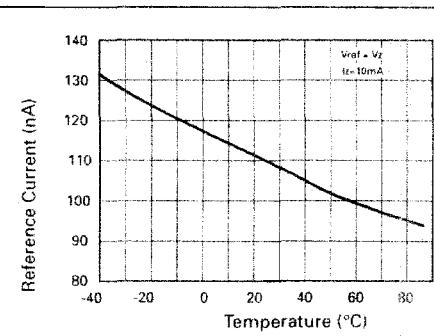


Reference Current v Temperature

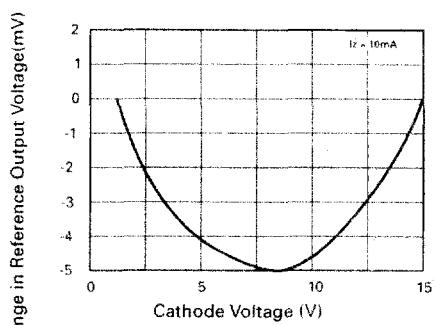


Change in  $V_{ref}$  v Cathode Voltage

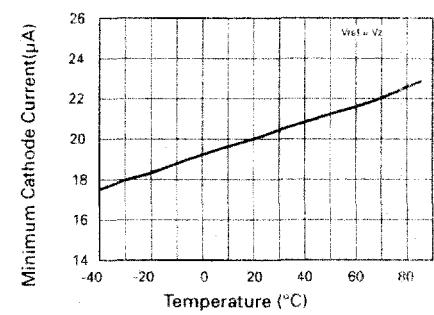


Cathode Current v Temperature

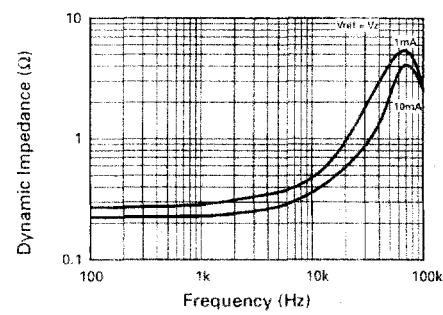

Dynamic Impedance v Frequency

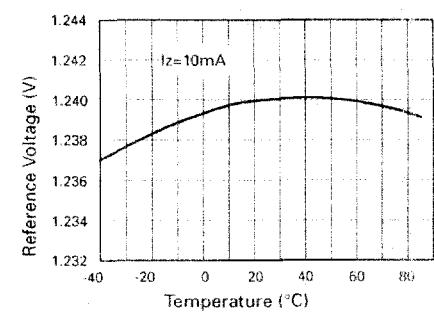


Reference Voltage v Temperature

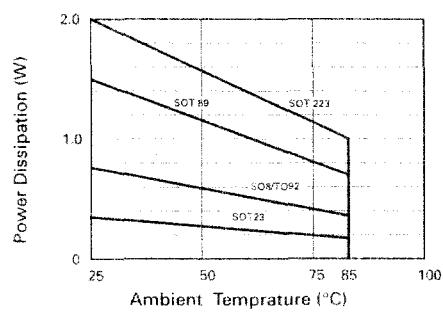


Power Dissipation Derating

**ZR2431**


## TYPICAL CHARACTERISTICS

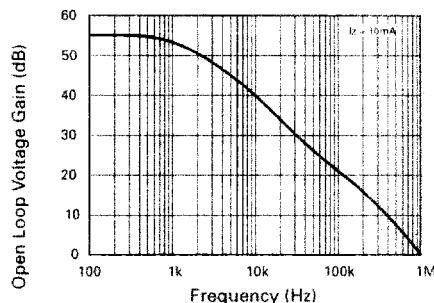


**Gain v Frequency**

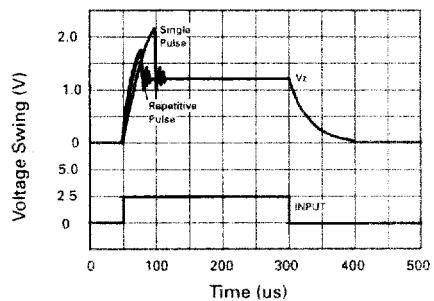

**Pulse Response**

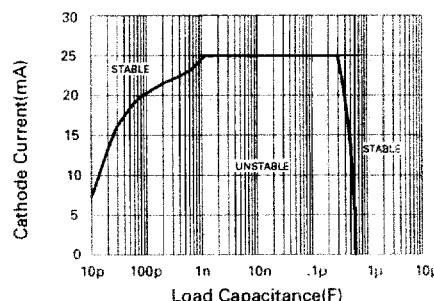


**Stability Boundary Conditions**

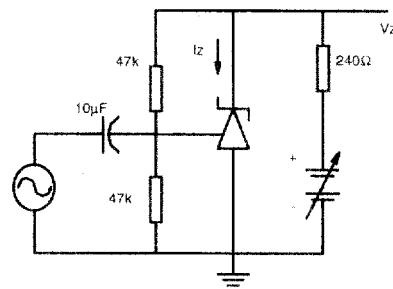


$I_Z = 10\text{mA}$ ,  $T_A = 25^\circ\text{C}$

**Test Circuit for Open Loop Voltage Gain**

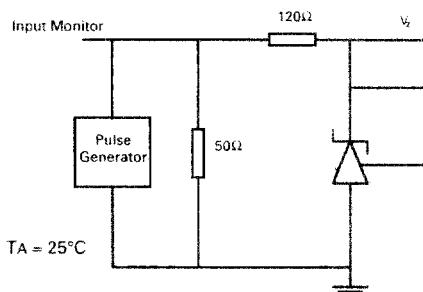

**Test Circuit for Pulse Response**

$V_{ref} < V_Z < 20$ ,  $I_Z = 10\text{mA}$ ,  $T_A = 25^\circ\text{C}$

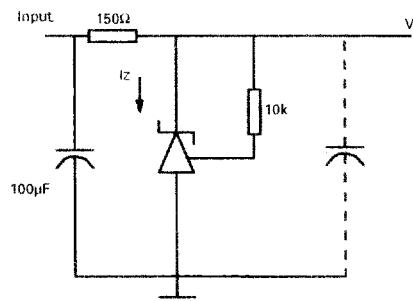

**Test Circuit for Stability Boundary Conditions**

# ZR2431

## DC TEST CIRCUITS








Fig 1 – Test Circuit for  $V_z = V_{ref}$  Fig 2 – Test Circuit for  $V_z > V_{ref}$

Fig 3 – Test Circuit for Off State current


## APPLICATION CIRCUITS

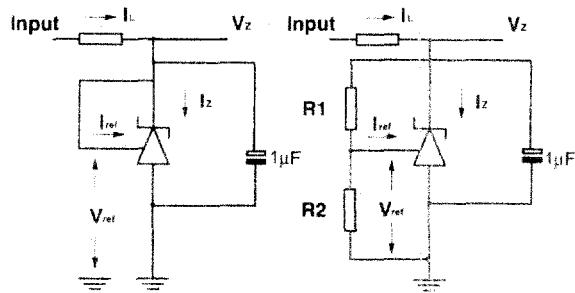


SHUNT REGULATOR



HIGHER CURRENT SHUNT REGULATOR




OUTPUT CONTROL OF A THREE TERMINAL FIXED REGULATOR




$$V_{out} = \left(1 + \frac{R_1}{R_2}\right) V_{ref}$$

SERIES REGULATOR



SINGLE SUPPLY COMPARATOR WITH TEMPERATURE COMPENSATED THRESHOLD

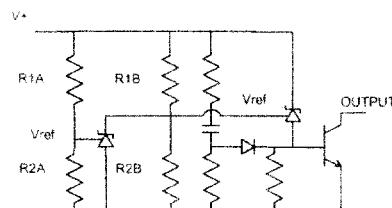

$$\text{Low limit} = \left(1 + \frac{R_{1B}}{R_{2B}}\right) V_{ref}$$


$$\text{High limit} = \left(1 + \frac{R_{1A}}{R_{2A}}\right) V_{ref}$$

OVER VOLTAGE / UNDER VOLTAGE PROTECTION CIRCUIT


# ZR2431

## CONNECTION DIAGRAMS


### SO8 Package Suffix - N8




### SOT223 Package Suffix - G




### SOT23 Package Suffix - F



### TO92 Package Suffix - C



### SOT89 Package Suffix - Z



## ORDERING INFORMATION

Part Number	Package	Tol %	Part Mark
ZR2431N802	SO8	2.5	ZR243102
ZR2431N801	SO8	1	ZR243101
ZR2431G02	SOT223	2.5	ZR243102
ZR2431G01	SOT223	1	ZR243101
ZR2431F02	SOT23	2.5	24D
ZR2431F01	SOT23	1	24E
ZR2431Z02	SOT89	2.5	24D
ZR2431Z01	SOT89	1	24E
ZR2431C02	TO92	2.5	ZR243102
ZR2431C01	TO92	1	ZR243101