



SB2045LCT

LOW VF SCHOTTKY RECTIFIER

VOLTAGE 45 Volts **CURRENT** 20 Amperes

FEATURES


- Low forward voltage drop, low power losses
- High efficiency operation
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

Case : TO-220AB, Plastic

Terminals : Solderable per MIL-STD-750, Method 2026

Weight: 0.0655 ounces, 1.859 grams

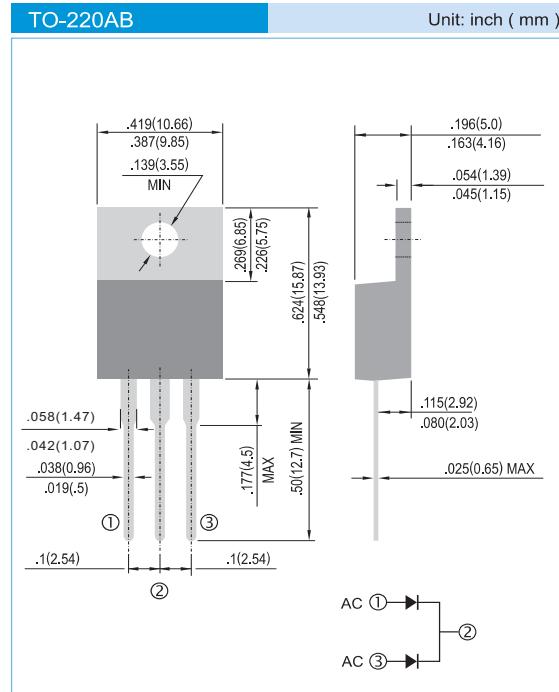

MAXIMUM RATINGS(T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	45	V
Maximum average forward rectified current per device per diode	I _{F(AV)}	20 10	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load per diode	I _{FSM}	145	A
Typical thermal resistance	R _{θJC}	2.5	°C / W
Operating junction	T _J	-55 to + 125	°C
Storage temperature range	T _{STG}	-55 to + 150	°C

ELECTRICAL CHARACTERISTICS(T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Breakdown voltage	V _{BR}	I _R =1mA	50	-	-	V
Instantaneous forward voltage per diode ⁽¹⁾	V _F	I _F =5A I _F =10A T _J =25°C	- -	0.42 0.46	0.46 0.52	V
Reverse current per diode ⁽²⁾	I _R	V _R =45V T _J =25°C T _J =100°C	- -	100 -	500 100	μA mA

Note.1.Pulse test : 300μs pulse width, 1% duty cycle

2Pulse test : pulse width ≤ 40ms



SB2045LCT

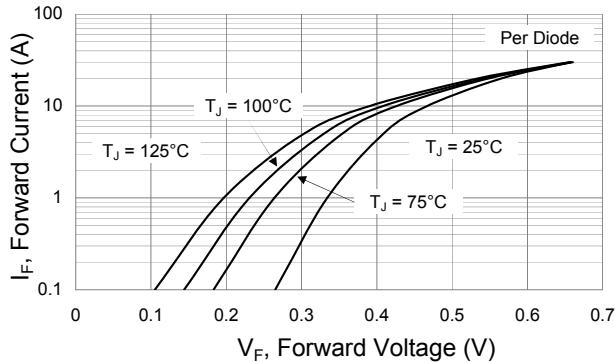


Fig.1 Typical Forward Characteristics

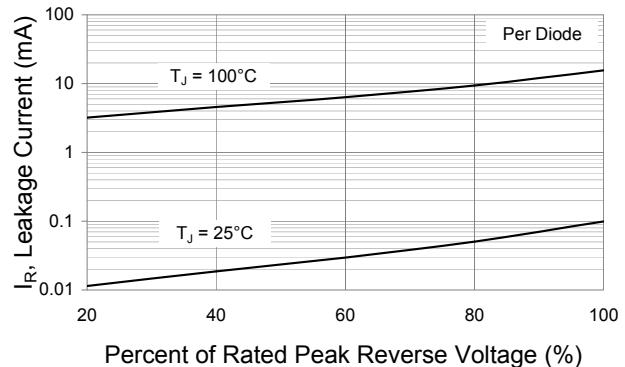


Fig.2 Typical Reverse Characteristics

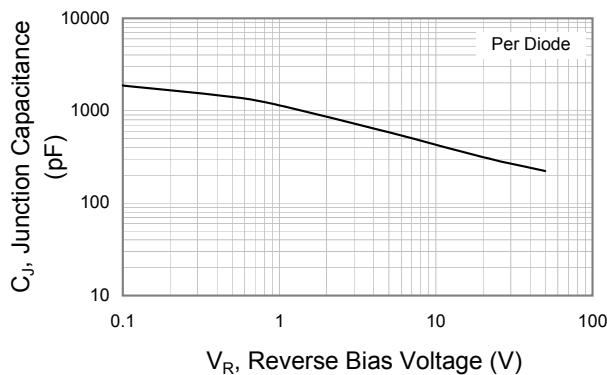


Fig.3 Typical Junction Capacitance

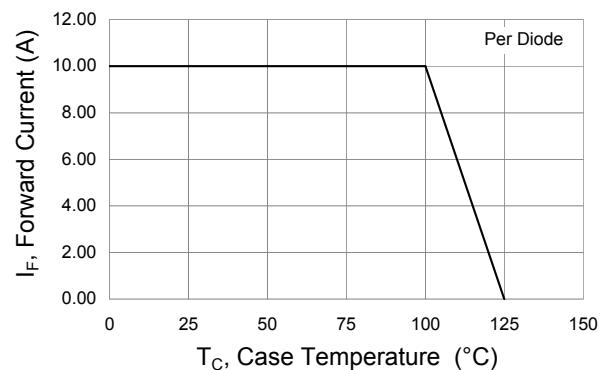


Fig.4 Forward Current Derating Curve