

General Description

The AO4912 uses advanced trench technology to provide excellent $R_{DS(ON)}$ and low gate charge. The two MOSFETs make a compact and efficient switch and synchronous rectifier combination for use in DC-DC converters. A Schottky diode is co-packaged in parallel with the synchronous MOSFET to boost efficiency further. *Standard Product AO4912 is Pb-free (meets ROHS & Sony 259 specifications). AO4912L is a Green Product ordering option. AO4912 and AO4912L are electrically identical.*

Features


Q1

 $V_{DS} (V) = 30V$
 $I_D = 8.5A$
 $R_{DS(ON)} < 17m\Omega$
 $R_{DS(ON)} < 25m\Omega$


Q2

 $V_{DS}(V) = 30V$
 $I_D=7A \quad (V_{GS} = 10V)$
 $<26m\Omega \quad (V_{GS} = 10V)$
 $<31m\Omega \quad (V_{GS} = 4.5V)$


SCHOTTKY

 $V_{DS} (V) = 30V, I_F = 3A, V_F < 0.5V @ 1A$


SOIC-8

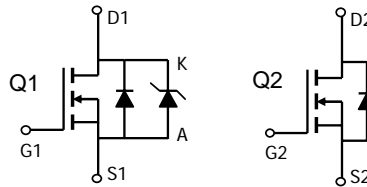

Absolute Maximum Ratings $T_A=25^\circ C$ unless otherwise noted

Parameter	Symbol	Max Q1	Max Q2	Units
Drain-Source Voltage	V_{DS}	30	30	V
Gate-Source Voltage	V_{GS}	± 20	± 12	V
Continuous Drain Current ^A	$T_A=25^\circ C$	8.5	7	A
		$T_A=70^\circ C$	6.8	
Pulsed Drain Current ^B	I_{DM}	40	30	
Power Dissipation	$T_A=25^\circ C$	2	2	W
		$T_A=70^\circ C$	1.28	
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	-55 to 150	$^\circ C$

Parameter	Symbol	Maximum Schottky	Units
Reverse Voltage	V_{DS}	30	V
Continuous Forward Current ^A	$T_A=25^\circ C$	3	A
		$T_A=70^\circ C$	
Pulsed Diode Forward Current ^B	I_{FM}	20	
Power Dissipation ^A	$T_A=25^\circ C$	2	W
		$T_A=70^\circ C$	
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	$^\circ C$

Parameter: Thermal Characteristics MOSFET Q1		Symbol	Typ	Max	Units
Maximum Junction-to-Ambient ^A	t ≤ 10s	R _{θJA}	48	62.5	°C/W
Maximum Junction-to-Ambient ^A	Steady-State		74	110	
Maximum Junction-to-Lead ^C	Steady-State	R _{θJL}	35	40	
Parameter: Thermal Characteristics MOSFET Q2		Symbol	Typ	Max	Units
Maximum Junction-to-Ambient ^A	t ≤ 10s	R _{θJA}	48	62.5	°C/W
Maximum Junction-to-Ambient ^A	Steady-State		74	110	
Maximum Junction-to-Lead ^C	Steady-State	R _{θJL}	35	40	
Thermal Characteristics Schottky					
Maximum Junction-to-Ambient ^A	t ≤ 10s	R _{θJA}	47.5	62.5	°C/W
Maximum Junction-to-Ambient ^A	Steady-State		71	110	
Maximum Junction-to-Lead ^C	Steady-State	R _{θJL}	32	40	

A: The value of R_{θJA} is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The value in any given application depends on the user's specific board design. The current rating is based on the t ≤ 10s thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C: The R_{θJA} is the sum of the thermal impedance from junction to lead R_{θJL} and lead to ambient.

D: The static characteristics in Figures 1 to 6 are obtained using 80 μs pulses, duty cycle 0.5% max.

E: These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The SOA curve provides a single pulse rating.

Rev 4: Aug 2005

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

Q2 Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}$, $V_{GS}=0\text{V}$	30			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=24\text{V}$, $V_{GS}=0\text{V}$ $T_J=55^\circ\text{C}$		0.003	1	μA
I_{GSS}	Gate-Body leakage current	$V_{DS}=0\text{V}$, $V_{GS}=\pm 12\text{V}$			100	nA
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}$, $I_D=250\mu\text{A}$	1	1.5	2	V
$I_{D(ON)}$	On state drain current	$V_{GS}=4.5\text{V}$, $V_{DS}=5\text{V}$	25			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}$, $I_D=7.0\text{A}$ $T_J=125^\circ\text{C}$		20	26	$\text{m}\Omega$
		$V_{GS}=4.5\text{V}$, $I_D=6.0\text{A}$		31.6	38	$\text{m}\Omega$
g_{FS}	Forward Transconductance	$V_{DS}=5\text{V}$, $I_D=7\text{A}$		22		S
V_{SD}	Diode Forward Voltage	$I_S=1\text{A}$		0.78	1	V
I_S	Maximum Body-Diode Continuous Current				3	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	$V_{GS}=0\text{V}$, $V_{DS}=15\text{V}$, $f=1\text{MHz}$		590	710	pF
C_{oss}	Output Capacitance			162		pF
C_{rss}	Reverse Transfer Capacitance			40		pF
R_g	Gate resistance	$V_{GS}=0\text{V}$, $V_{DS}=0\text{V}$, $f=1\text{MHz}$		0.45	0.6	Ω
SWITCHING PARAMETERS						
Q_g	Total Gate Charge	$V_{GS}=4.5\text{V}$, $V_{DS}=15\text{V}$, $I_D=7.0\text{A}$		6.04	7.3	nC
Q_{gs}	Gate Source Charge			1.46		nC
Q_{gd}	Gate Drain Charge			2.56		nC
$t_{D(on)}$	Turn-On DelayTime	$V_{GS}=10\text{V}$, $V_{DS}=15\text{V}$, $R_L=2.2\Omega$, $R_{GEN}=3\Omega$		3.7	5.5	ns
t_r	Turn-On Rise Time			3.5	5.5	ns
$t_{D(off)}$	Turn-Off DelayTime			14.9	22	ns
t_f	Turn-Off Fall Time			2.5	4	ns
t_{rr}	Body Diode Reverse Recovery time	$I_F=7\text{A}$, $dI/dt=100\text{A}/\mu\text{s}$		21.2	26	ns
Q_{rr}	Body Diode Reverse Recovery charge	$I_F=7\text{A}$, $dI/dt=100\text{A}/\mu\text{s}$		14.2	21	nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in^2 FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The value in any given application depends on the user's specific board design. The current rating is based on the $t \leq 10\text{s}$ thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C. The $R_{\theta JA}$ is the sum of the thermal impedance from junction to lead $R_{\theta JL}$ and lead to ambient.

D. The static characteristics in Figures 1 to 6,12,14 are obtained using $80\mu\text{s}$ pulses, duty cycle 0.5% max.

E. These tests are performed with the device mounted on 1in^2 FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The SOA curve provides a single pulse rating.

Rev 4 : Aug 2005

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

Q2 TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

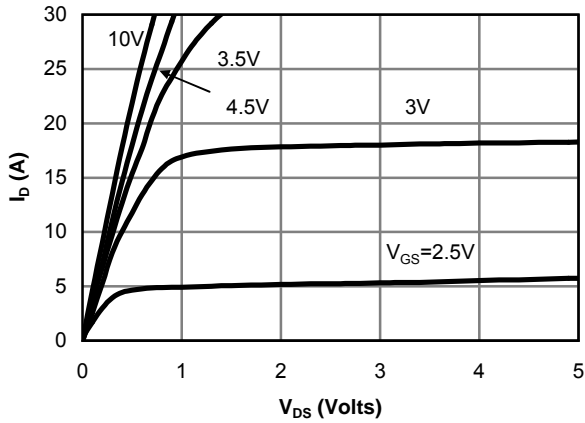


Fig 1: On-Region Characteristics

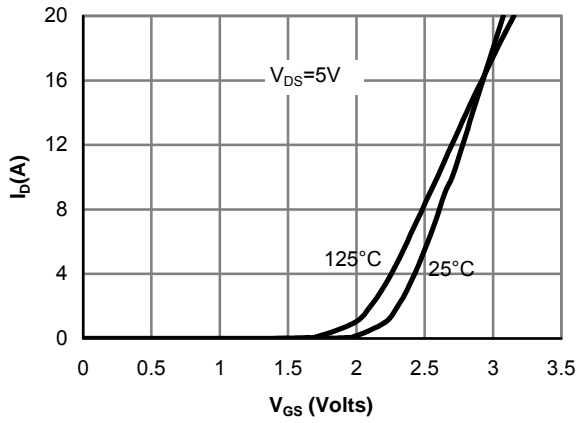


Figure 2: Transfer Characteristics

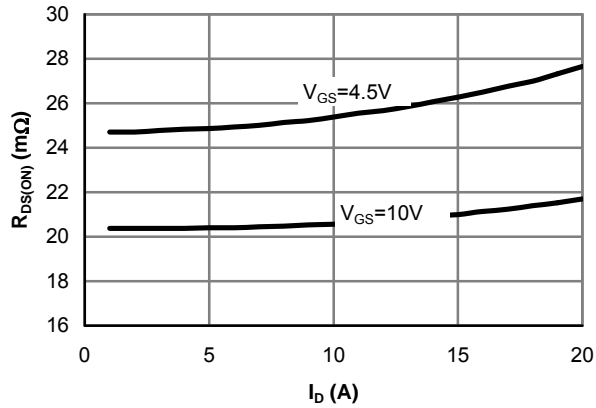


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

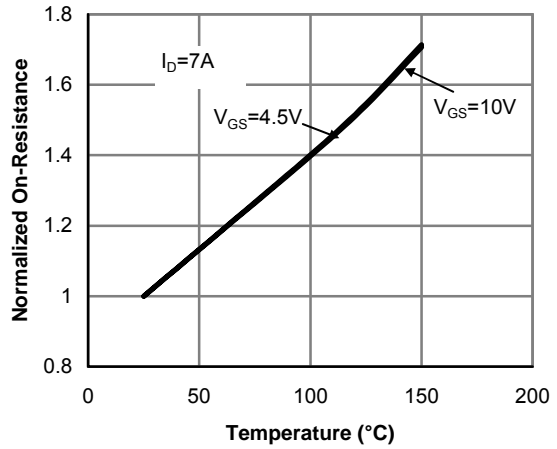


Figure 4: On resistance vs. Junction Temperature

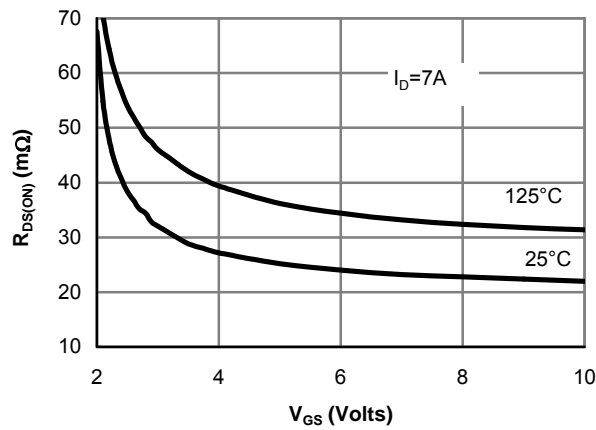


Figure 5: On resistance vs. Gate-Source Voltage

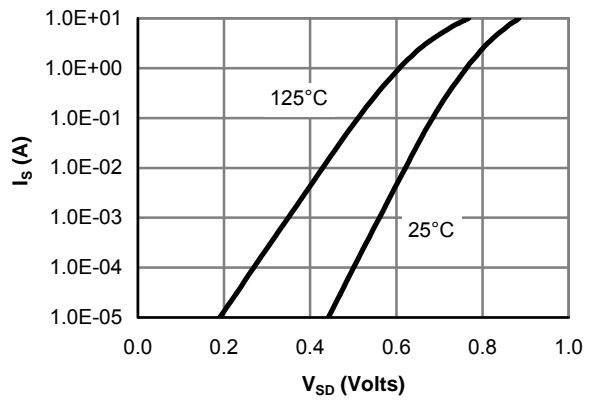


Figure 6: Body-Diode Characteristics

Q2 TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

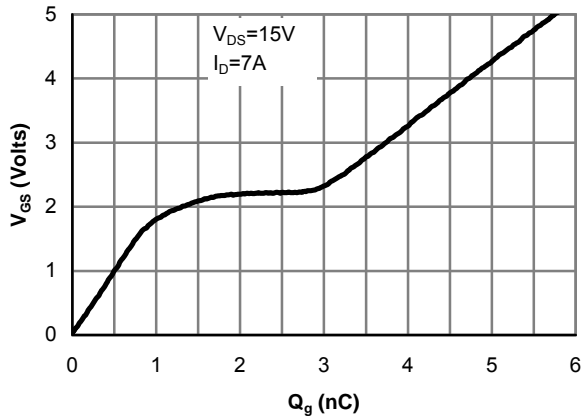


Figure 7: Gate-Charge Characteristics

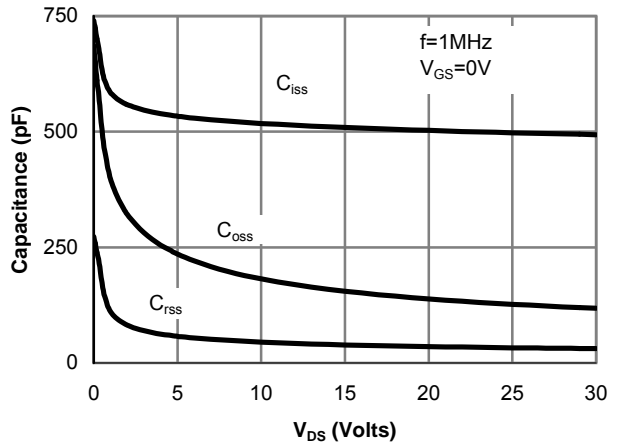


Figure 8: Capacitance Characteristics

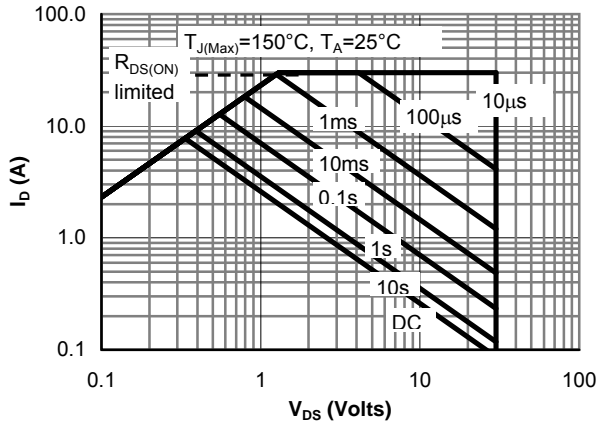


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

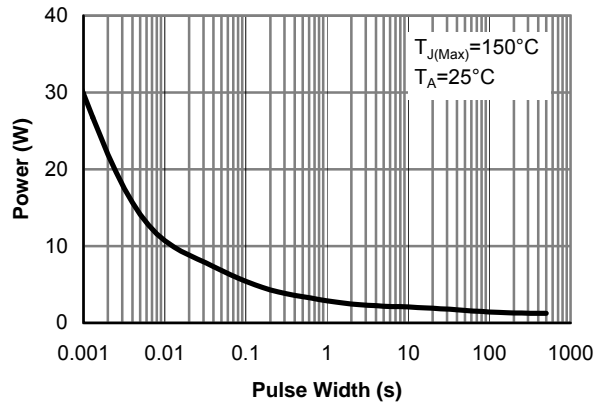


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)

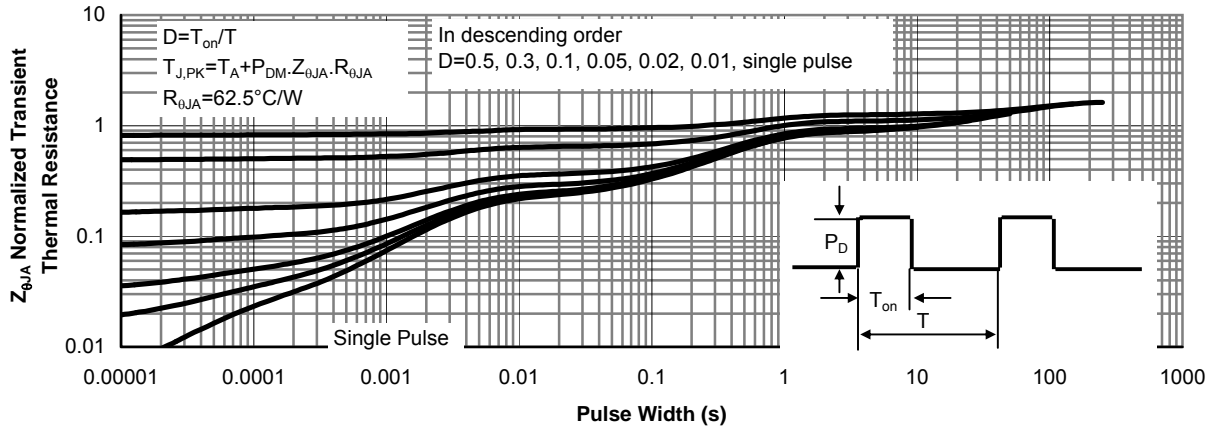


Figure 11: Normalized Maximum Transient Thermal Impedance

Q1 Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV _{DSS}	Drain-Source Breakdown Voltage	I _D =250μA, V _{GS} =0V	30			V
I _{DSS}	Zero Gate Voltage Drain Current. by Schottky leakage)	(Set V _R =30V V _R =30V, T _J =125°C V _R =30V, T _J =150°C		0.007	0.05	mA
				3.2	10	
				12	20	
I _{GSS}	Gate-Body leakage current	V _{DS} =0V, V _{GS} = ±20V			100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} I _D =250μA	1	1.8	3	V
I _{D(ON)}	On state drain current	V _{GS} =4.5V, V _{DS} =5V	30			A
R _{DS(ON)}	Static Drain-Source On-Resistance	V _{GS} =10V, I _D =8.5A T _J =125°C		13.8	17	mΩ
				20	24	
		V _{GS} =4.5V, I _D =7A		19.7	25	mΩ
g _{FS}	Forward Transconductance	V _{DS} =5V, I _D =8.5A		23		S
V _{SD}	Diode+Schottky Forward Voltage	I _S =1A		0.45	0.5	V
I _S	Maximum Body-Diode+Schottky Continuous Current				3.5	A
DYNAMIC PARAMETERS						
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =15V, f=1MHz		971	1165	pF
C _{oss}	Output Capacitance (FET + Schottky)			190		pF
C _{riss}	Reverse Transfer Capacitance			110		pF
R _g	Gate resistance	V _{GS} =0V, V _{DS} =0V, f=1MHz		0.7	0.85	Ω
SWITCHING PARAMETERS						
Q _{g(10V)}	Total Gate Charge	V _{GS} =10V, V _{DS} =15V, I _D =8.5A		19.2	23	nC
Q _g	Total Gate Charge			9.36	11.2	nC
Q _{gs}	Gate Source Charge			2.6		nC
Q _{gd}	Gate Drain Charge			4.2		nC
t _{D(on)}	Turn-On DelayTime	V _{GS} =10V, V _{DS} =15V, R _L =1.8Ω, R _{GEN} =3Ω		5.2	7.5	ns
t _r	Turn-On Rise Time			4.4	6.5	ns
t _{D(off)}	Turn-Off DelayTime			17.3	25	ns
t _f	Turn-Off Fall Time			3.3	5	ns
t _{rr}	Body Diode + Schottky Reverse Recovery Time	I _F =8.5A, dI/dt=100A/μs		19.3	23	ns
Q _{rr}	Body Diode + Schottky Reverse Recovery Charge	I _F =8.5A, dI/dt=100A/μs		9.4	11	nC

A: The value of R_{θJA} is measured with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The value in any given application depends on the user's specific board design. The current rating is based on the t₁₀ ≤ 10s thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C: The R_{θJA} is the sum of the thermal impedance from junction to lead R_{θJL} and lead to ambient.

D: The static characteristics in Figures 1 to 6,12,14 are obtained using 80 μs pulses, duty cycle 0.5% max.

E: These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The SOA curve provides a single pulse rating.

F: The Schottky appears in parallel with the MOSFET body diode, even though it is a separate chip. Therefore, we provide the net forward drop, capacitance and recovery characteristics of the MOSFET and Schottky. However, the thermal resistance is specified for each chip separately.

Rev 4 : Aug 2005

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

Q1 TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

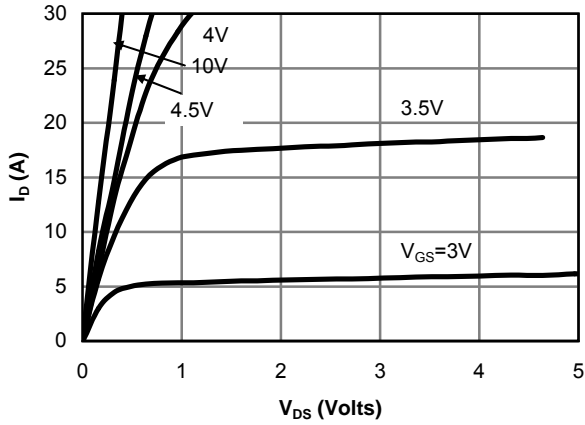


Fig 1: On-Region Characteristics

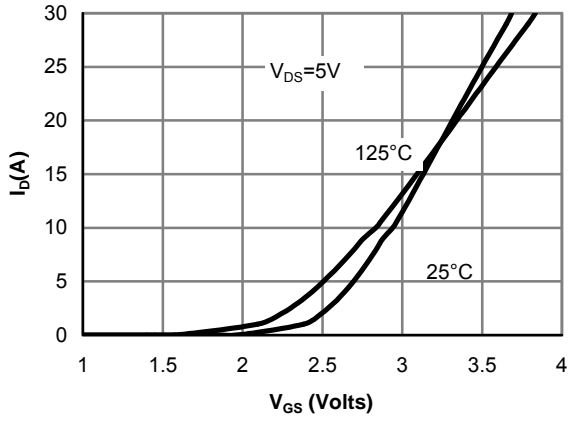


Figure 2: Transfer Characteristics

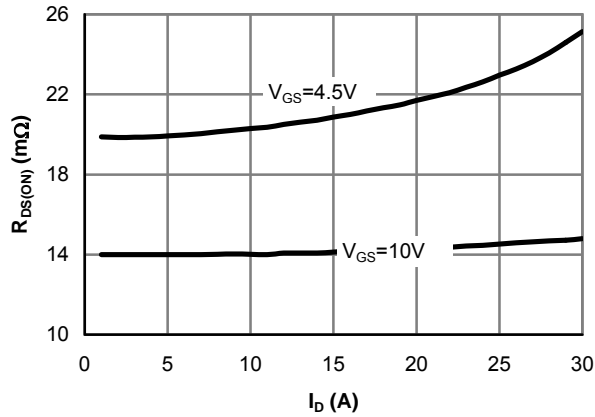


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

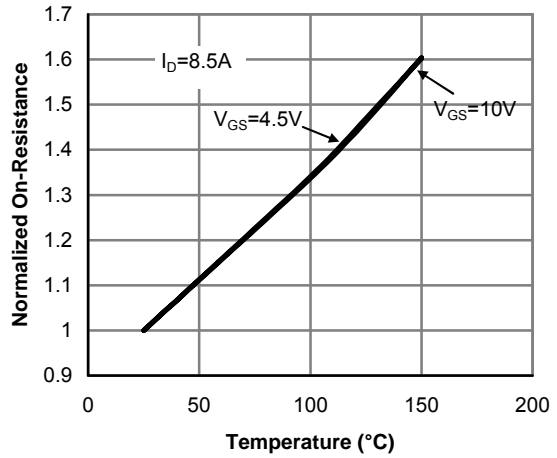


Figure 4: On resistance vs. Junction Temperature

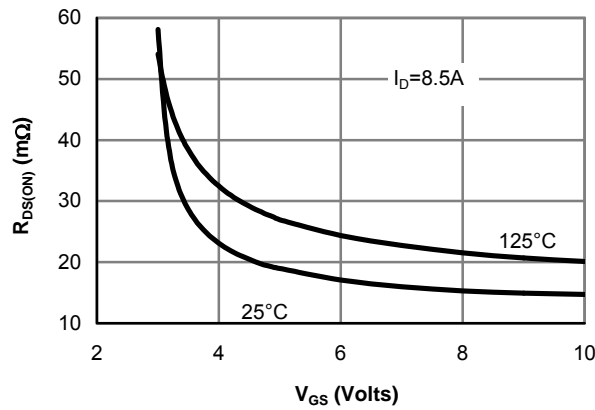


Figure 5: On resistance vs. Gate-Source Voltage

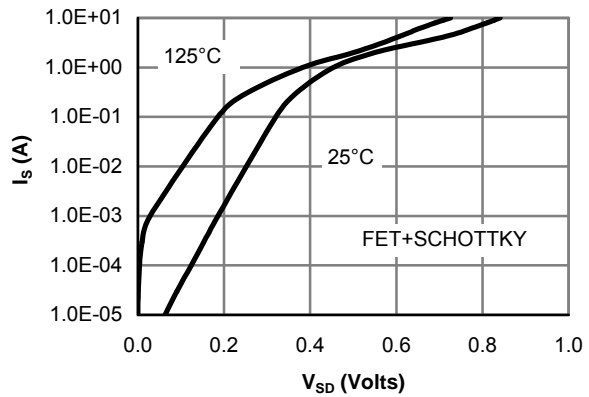


Figure 6: Body-Diode Characteristics (Note F)

Q1 TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

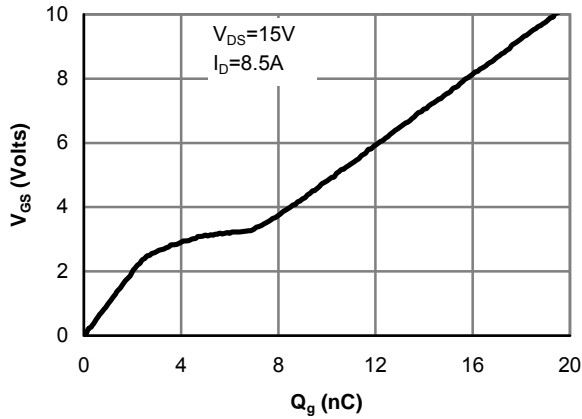


Figure 7: Gate-Charge Characteristics

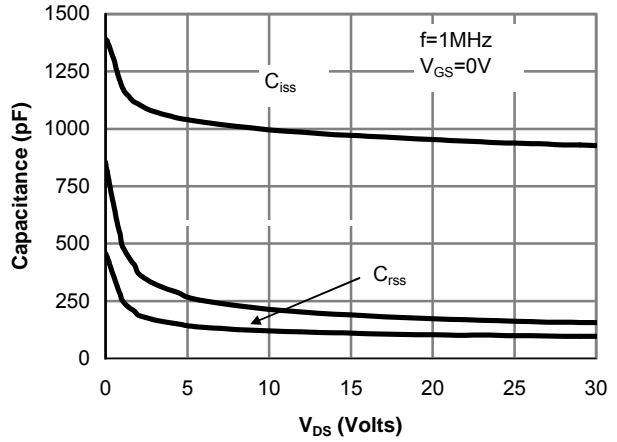


Figure 8: Capacitance Characteristics

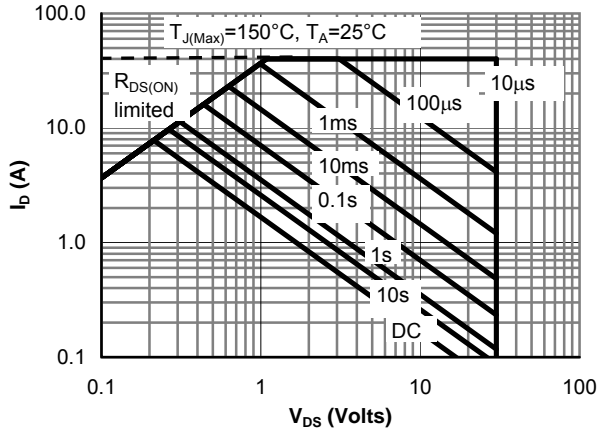


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

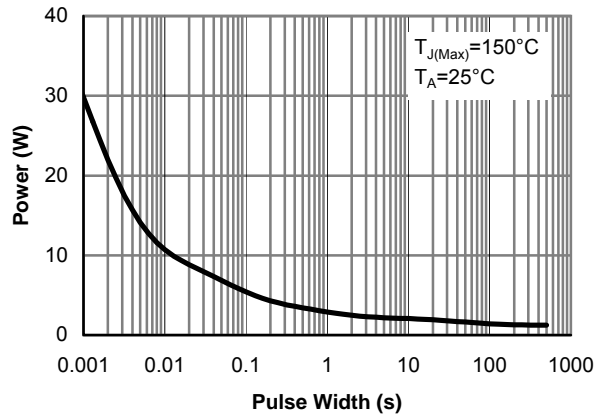


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)

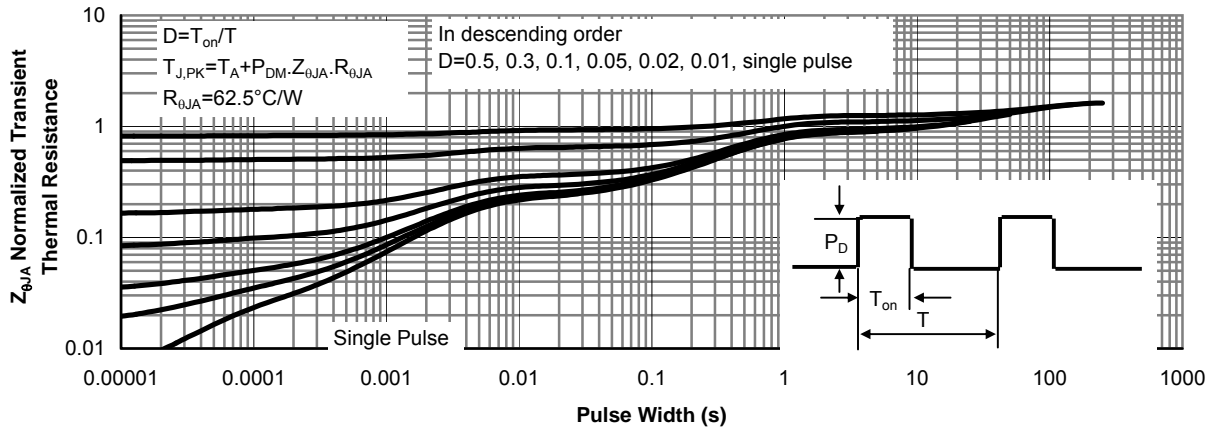


Figure 11: Normalized Maximum Transient Thermal Impedance