



TWO LINE PAIR 4-20mA CONTROL LOOP PROTECTOR

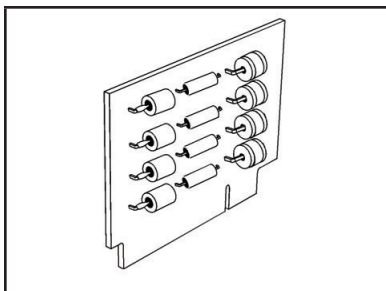

420LB

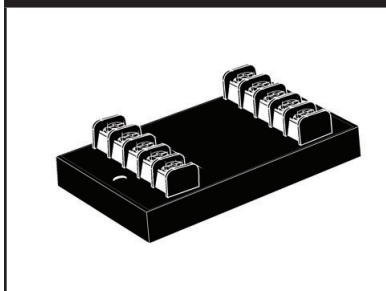

420LE

DESCRIPTION

The 420LE/B series is a two stage transient voltage protector providing primary and secondary protection against lightning, inductive switching and electrostatic discharge (ESD) transient threats. The first stage diverts the transient current through the ground terminal return path and the second stage clamps the voltage to a safe level without interruption of service.

The 420LE/B series is designed to protect data lines from differential (line to line) and common mode (line to ground) transients. Terminals 1 and 2, 3 and 4 for the 420LE and pins 2 and 3, 4, and 5 for the 420LB are designated as line pairs. Each line pair is referenced to ground. A transient voltage suppressor is connected across each line pair for differential mode protection. Each line pair is referenced to ground.

This product can also be used on telephone, signal/data lines, security, timing and control interface circuits. For most applications, the product should be located as close as possible to the equipment being protected. A low impedance grounding system is important to maintain a low voltage clamp between the line-to-ground connection.

FEATURES

- Compatible with IEC 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- Compatible with IEC 61000-4-4 (EFT): 40A - 5/50ns
- Compatible with IEC 61000-4-5 (Surge): 95A, 8/20 μ s, Level 4 (Line-Gnd) & 48A, Level 4 (Line-Line)
- Designed for 4-20mA Current Loops
- Automatic Reset - Does Not Interrupt Service
- Permanent Two-Stage Line Pair Protection
- Common Mode & Differential Mode Protection
- Subnanosecond Response Time
- Effective Against Lightning, Inductive Switching and ESD

MECHANICAL CHARACTERISTICS

- Approximate Weight: 28 grams (420LB) & 142 grams (420LE)
- Flammability Rating UL 94V-0

APPLICATIONS

- Multi-Process Control Loops
- Fire & Security Systems
- Petro-Chemical Plants
- Refineries & Tank Farms

TYPICAL DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Operating Line Current	I_O	100	mA
Transient Source Voltage	-	6	kV
Transient Current - 8/20 μ s waveform	-	10	kA/Wire
Operating Temperature	T_A	-55 to 100	°C
Storage Temperature	T_{STG}	-55 to 100	°C

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER	MAXIMUM OPERATING LINE VOLTAGE V_{OP} \pm VOLTS	MAXIMUM LEAKAGE CURRENT @ V_{OP} I_D μ A	MAXIMUM CLAMPING VOLTAGE (8/20 μ s) @ 2000A V_C VOLTS	MAXIMUM CAPACITANCE @ 0V, 1MHz C pF	MAXIMUM LINE THROUGHPUT RESISTANCE R OHMS
420LB28	28.0	5.0	40	2800	12
420LB35	35.0	5.0	60	1500	12
420LB60	60.0	5.0	85	1000	12
420LE28	28.0	5.0	40	2800	12
420LE35	35.0	5.0	60	1500	12
420LE60	60.0	5.0	85	1000	12

INSTALLATION INSTRUCTIONS

There are five (5) terminals on the LINE SIDE and five (5) terminals on the EQUIPMENT SIDE of the 420LE, 4 data lines and one ground. Both grounds are connected together internally. A single low impedance is ground sufficient. Incoming data lines are cut or disconnected from the equipment to insert the 420LE/B products. The incoming lines are to be connected to the line side terminals as the equipment side lines are connected to the equipment side terminals. The location of the product should be as close to the equipment as possible. The 420LE/B series is designed with a short circuit failure mode to give maximum protection. A fuse, fusible link, or circuit breaker is recommended for each data/signal line on the input side for those that require an open circuit failure mode.


Caution: A low DC resistance ground may not be indicative of a good lightning ground. Lightning contains a broad spectrum of frequencies up to 1 MHz. A low impedance path to ground at the transient frequencies is necessary. A ground strap is recommended or a #6 AWG stranded wire. For wire lengths over 1.5 meters, there may be some excessive line to earth potential under severe thunderstorm conditions.

PACKAGE INFORMATION
420LB OUTLINE DIMENSIONS

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	-	12.7	-	0.50
B	-	76.2	-	3.0
C	-	48.2	-	1.90
D	-	7.6	-	0.30
E	-	17.8	-	0.7

NOTES


- I/O contacts spaced at 0.156" (3.96mm) centers.

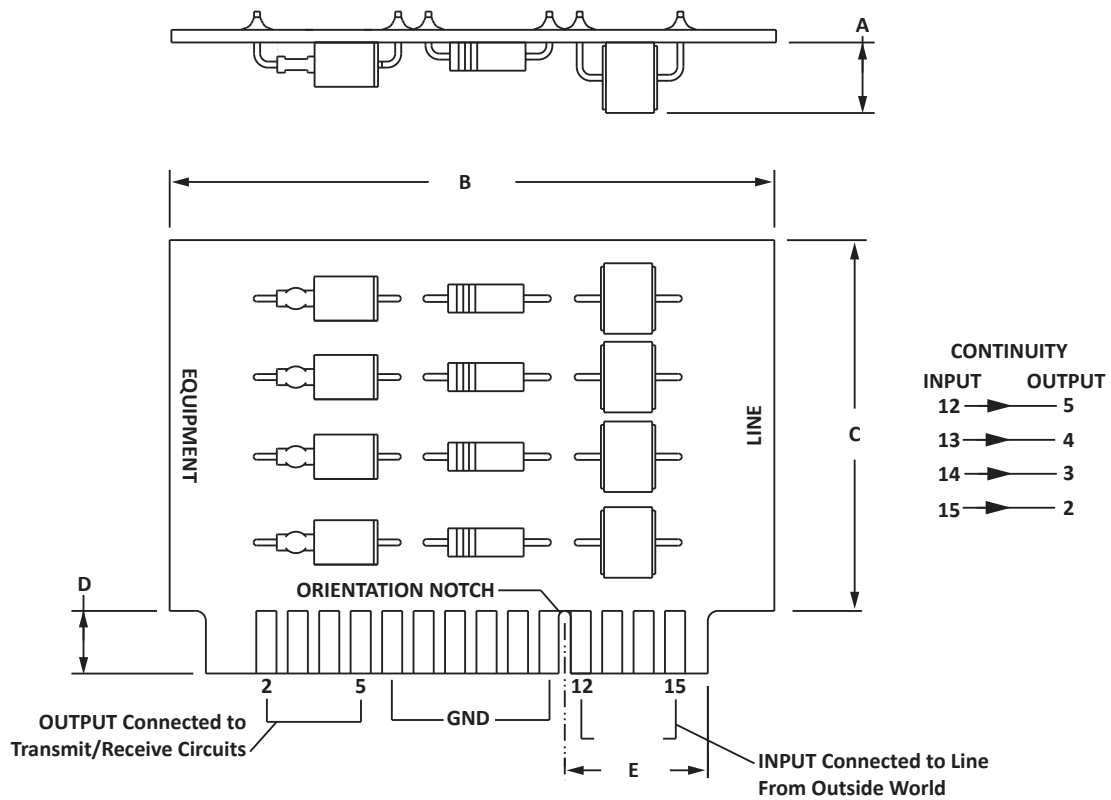

PACKAGE INFORMATION

420LE OUTLINE DIMENSIONS

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	-	95.5	-	3.8
B	82.22	82.98	3.235	3.265
C	-	57.2	-	2.25
D	-	30.2	-	1.125
E	-	15.5	-	0.61
F	-	30.2	-	1.19

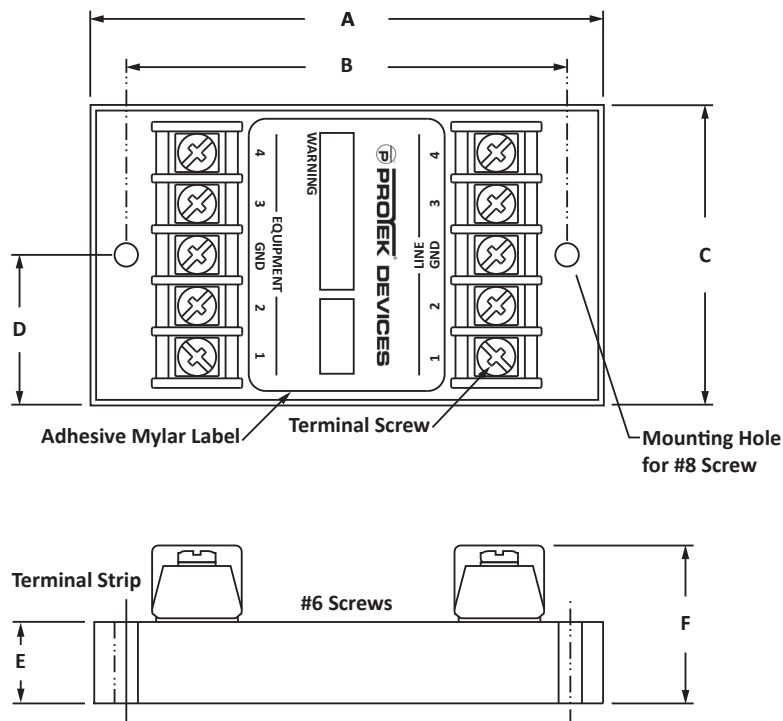

ORDERING INFORMATION

BASE PART NUMBER (xx = Voltage)	MARKING
420LBxx	Logo, Date Code, Terminal Designations and Part Number
420LExx	Logo, Date Code, Terminal Designations and Part Number

COMPANY INFORMATION

COMPANY PROFILE

In business more than 20 years, ProTek Devices™ is a privately-held company located in Tempe, Arizona, that offers a product line of transient voltage suppressors (TVS); avalanche breakdown diodes; steering diode TVS arrays and other surge suppressor component products. These TVS devices protect electronic systems from the effects of lightning, electrostatic discharge (ESD), nuclear electromagnetic pulses (NEMP), inductive switching and EMI / RFI. ProTek Devices also offers high performance interface and linear products that include analog switches; multiplexers; LED drivers; audio control ICs; RF and related high frequency products. The analog devices work in a host of consumer; industrial; automotive and other applications.

CONTACT US

Corporate Headquarters

2929 South Fair Lane
Tempe, Arizona 85282
USA

By Telephone

General: 602-431-8101
Sales: & Marketing: 602-414-5109
Customer Service: 602-414-5114
Product Technical Support: 602-414-5107

By Fax

General: 602-431-2288

By E-mail:

Sales: sales@protekdevices.com
Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19
Zervex
Singapore - 408538
Tel: +65-67488312
Fax: +65-67488313

Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 1998 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.