


euro-block

product specification

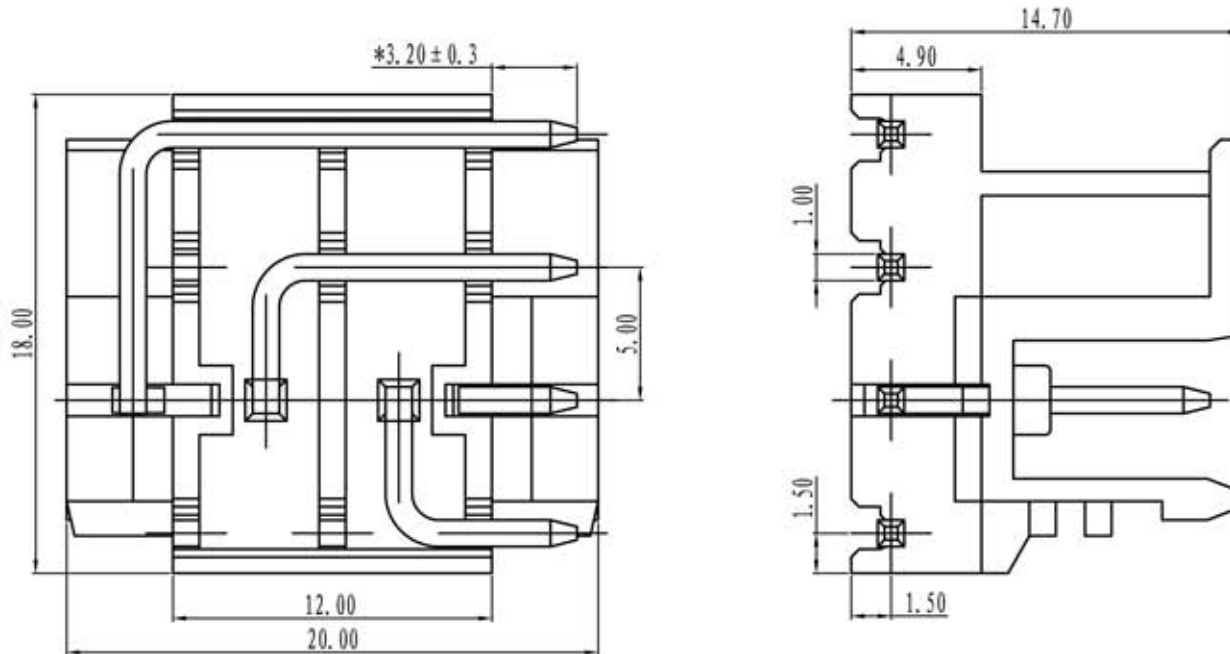

Electrical

Standard: UL-IEC
 Rated voltage: 300V-320V
 Rated current: 15A-17.5A
 Contact resistance: 20m Ω
 Insulation resistance: 5000M Ω/DC1000V
 Withstanding voltage: AC2000V/1Min

Mechanical

Temp.Range: -40°C~+105°C
 MAX soldering: +250°C for 5 sec

Dimensions

Poles: 4p

Material

Housing: PA66, UL94V-0

Schema generale del codice di ordinazione / General description of ordering code

serie	n°poli	passo	versione	colore	custom
SMC	04	5	R		

TOLERANCES EXCEPT AS NOTED

variable range	linear dimension					fillet	chamfer	∠ short angle sid				≡	—	□	//	⊥	
	to 6	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to	all	to 6	over 6 to 10	over 10 to 50	over 50 to 120	over 120 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to	
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1'	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	FIRST ANGLE PROJECTION	
					NAME	SMC04-5-R