

High Power Broadband Noise Sources

NMA5111-B1T

1000 MHz to 2000 MHz



Specifications

RF Frequency	1000 MHz to 2000 MHz
Noise Output	92 to 99 dB ENR
Noise Spectral Density (N_o)	-80 dBm/Hz Min
Noise Power (N)	10 dBm
Flatness	4 dB P-P Max
VSWR	2.0:1
Peak Factor	5:1
Bias Voltage	15 V
Supply Current	325 mA Max
Impedance	50 ohms

Package and Connectivity


Construction	Coaxial
Package Type	T Package

Environmental

Operating Temperature	0 to 70 °C
Storage Temperature	-40 to 95 °C

Notes

No TTL Control

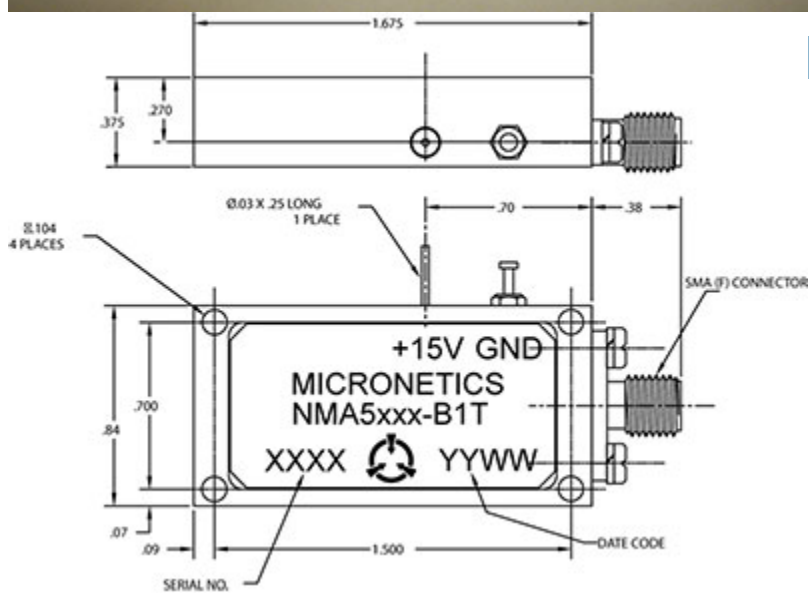

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | www.Micronetics.com

MICRONETICS

