


.12 #

KN-59-158

REVISIONS

ISSUE	CHANGES
0	ER 9249 WLA 22 JAN 71
3	CN 29365 D EAT 5 NOV 81

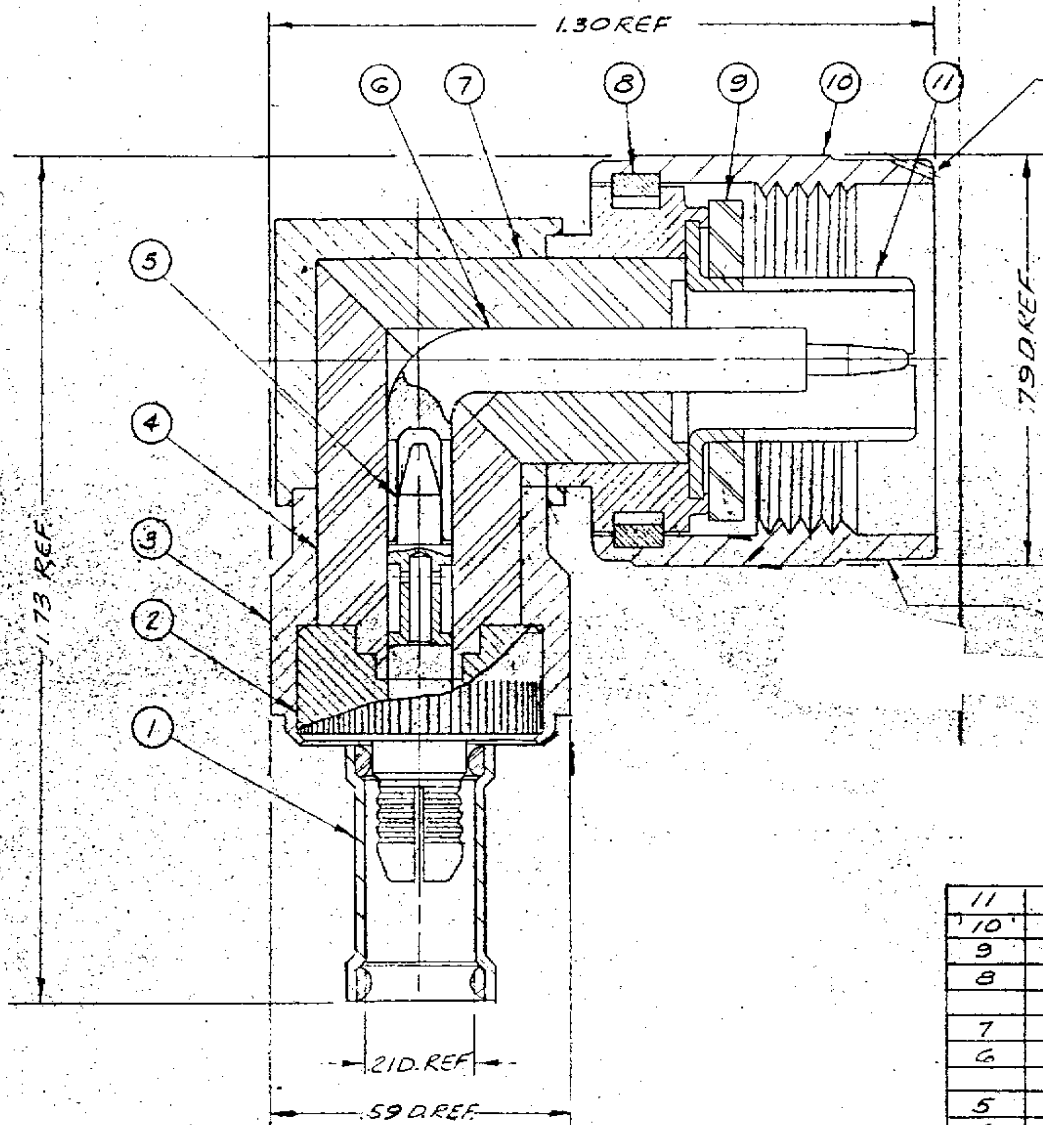

NOTES:

1. FOR USE WITH RG-58, 58A, 58C, 141 & 141A/U CABLE.
2. FOR CABLE TRIMMING USE KTJ-10 & KTD-51.
3. FOR FORMING USE CRIMP DIE SIZE G1.
4. FOR CABLING INSTRUCTIONS SEE CP-403.

STAMP: KINGS KN-59-158

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION. IT MAY NOT BE REPRODUCED WITHOUT WRITTEN AUTHORIZATION BY KINGS ELECTRONICS CO., INC.

NOTICE

ITEM	REQD	DESCRIPTION	DWG. NO.
11	1	CONTACT	
10	1	COUPLING NUT	
9	1	GASKET	
8	1	SPRING	
7	1	INSULATOR	
6	1	CONTACT	
5	1	CRIMP CONTACT	D-59-116-2-M07
4	1	INSULATOR	
3	1	BODY ASSEMBLY	
2	1	K-GRIP	
1	1	WPK-GRIP SLEEVE	C-59-197-2-M06

REP:	
FINISH:	
SPEC:	
MATL:	
SPEC:	
TYPE N ANGLE PLUG	
DRAWN WLA	DATE 22 JAN 71
APPR. LI	DATE 22 JAN 71
KINGS ELECTRONICS 40 MARBLEDALE ROAD YUCCAHOE, N. Y.	
KN-59-158	

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS ± .010 DECIMALS ± .004 ANGLES ± 0° 30' T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED THE SUM OF THEIR TOLERANCES.
2. REMOVE ALL BURRS. BREAK SHARP EDGES .003 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

S-D