



CHENMKO ENTERPRISE CO.,LTD

SURFACE MOUNT GLASS PASSIVATED SUPER FAST SILICON RECTIFIER

VOLTAGE RANGE 50 - 600 Volts CURRENT 8.0 Amperes

Lead free devices

**UPL81PT
THRU
UPL86PT**



PROVISIONAL SPEC.

FEATURE

- *Small Surface Mounting Type. (SMP)
- * Low forward voltage, high current capability
- * Low leakage current
- * Glass passivated junction
- * High temperature soldering guaranteed :
260°C/10 seconds at terminals

SMP

CIRCUIT

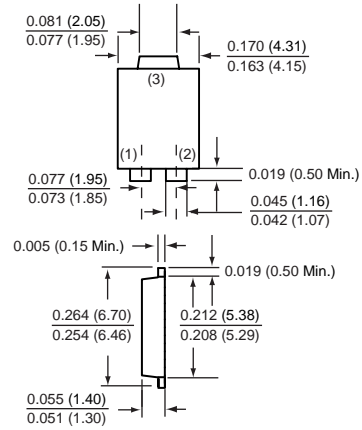

Dimensions in inches and (millimeters)

SMP

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	UPL81PT	UPL82PT	UPL83PT	UPL84PT	UPL85PT	UPL86PT	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	300	400	600	Volts
Maximum RMS Voltage	V _{RMS}	35	70	140	210	280	420	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	300	400	600	Volts
Maximum Average Forward Rectified Current T _L = 90°C	I _O	8.0						Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	120						Amps
Typical Junction Capacitance (Note 1)	C _J	50				30		pF
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +150						°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)


CHARACTERISTICS	SYMBOL	UPL81PT	UPL82PT	UPL83PT	UPL84PT	UPL85PT	UPL86PT	UNITS
Maximum Instantaneous Forward Voltage at 8.0 A DC	V _F	0.95			1.30	1.50		Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	@ TA = 25°C	10						uAmps
	@ TA = 100°C	500						uAmps
Maximum Reverse Recovery Time (Note 2)	t _{rr}	35				50		nSec

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts
2. Test Conditions : I_F = 0.5 A, I_R = -1.0 A, I_{RR} = -0.25 A

2004-7

RATING CHARACTERISTIC CURVES (UPL81PT THRU UPL86PT)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

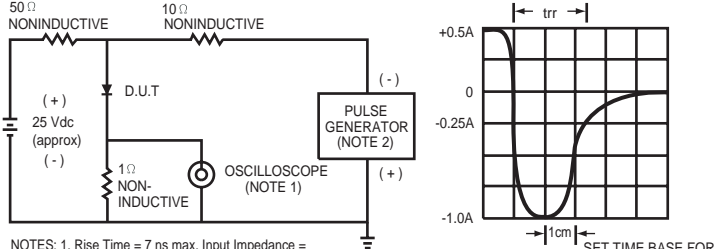

NOTES: 1. Rise Time = 7 ns max. Input Impedance = 1 megohm, 22 pF.
2. Rise Time = 10 ns max. Source Impedance = 50 ohms.

FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE




FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

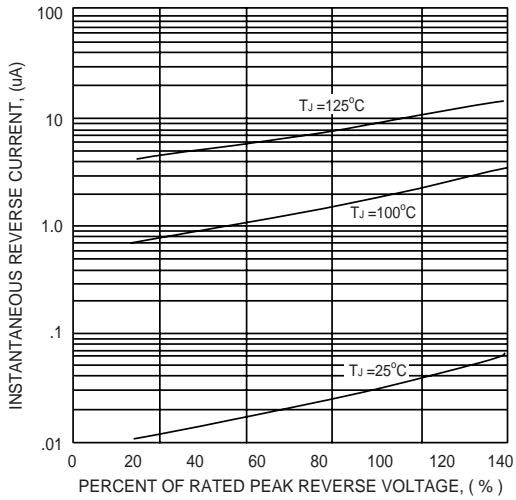


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

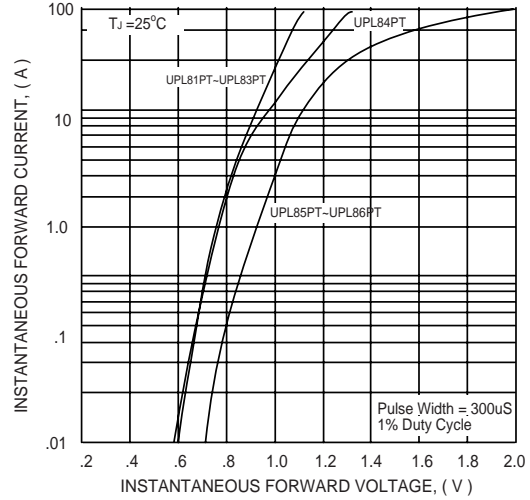


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

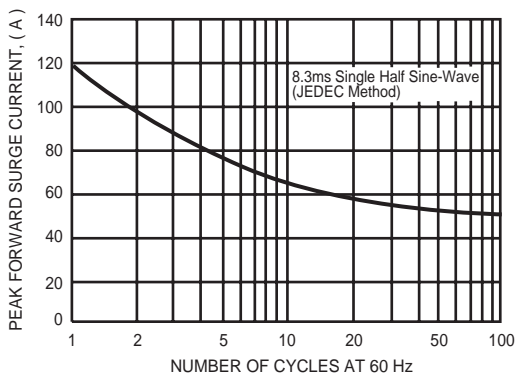


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

