

VN10/0605/0610/2222 Series

N-Channel Enhancement-Mode MOSFET Transistors

VN10LE VN0605T VN2222LL
VN10LM VN0610LL VN2222LM

Product Summary

Part Number	V _{(BR)DSS} Min (V)	r _{D(on)} Max (Ω)	V _{GS(th)} (V)	I _D Min (A)
VN10LE	60	5 @ V _{GS} = 10 V	0.8 to 2.5	0.38
VN10LM		5 @ V _{GS} = 10 V	0.8 to 2.5	0.32
VN0605T		5 @ V _{GS} = 10 V	0.8 to 3.0	0.18
VN0610LL		5 @ V _{GS} = 10 V	0.8 to 2.5	0.28
VN2222LL		7.5 @ V _{GS} = 5 V	0.6 to 2.5	0.23
VN2222LM		7.5 @ V _{GS} = 5 V	0.6 to 2.5	0.26





Features

- Low On-Resistance: 2.5 Ω
- Low Threshold: <2.1 V
- Low Input Capacitance: 22 pF
- Fast Switching Speed: 7 ns
- Low Input and Output Leakage
- Low Offset Voltage
- Low-Voltage Operation
- Easily Driven Without Buffering
- High-Speed Circuits
- Low Error Voltage

Benefits

Applications

- Direct Logic-Level Interface: TTL/CMOS
- Solid State Relays
- Drivers: Relays, Solenoids, Lamps, Hammers, Displays, Memories, Transistors, etc.
- Battery Operated Systems

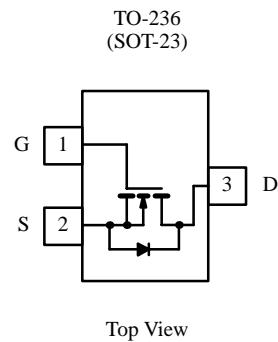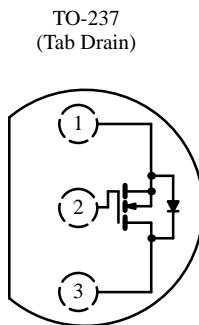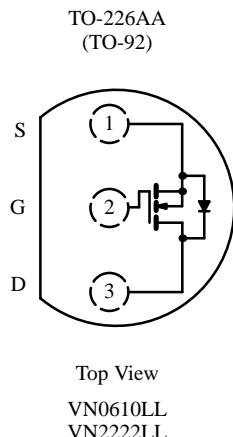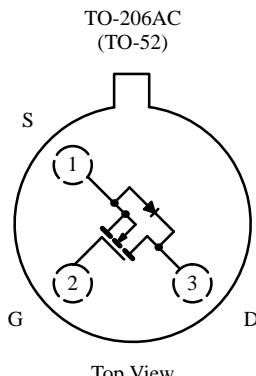

Updates to this data sheet may be obtained via facsimile by calling Siliconix FaxBack, 1-408-970-5600. Please request FaxBack document #70212.

VN10/0605/0610/2222 Series

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

Parameter	Symbol	VN10LE ^b	VN10LM	VN0605T	VN0610LL	VN2222LL	VN2222LM	Unit
Drain-Source Voltage	V_{DS}	60	60	60	60	60	60	V
Gate-Source Voltage—Non-Repetitive ^c	V_{GSM}		± 30					
Gate-Source Voltage—Continuous	V_{GS}	± 20	± 20	± 20	± 20	± 20	± 20	
Continuous Drain Current ($T_J = 150^\circ\text{C}$)	I_D	0.38	0.32	0.18	0.28	0.23	0.26	A
$T_A = 100^\circ\text{C}$		0.24	0.2	0.11	0.17	0.14	0.16	
Pulsed Drain Current ^a	I_{DM}	1.0	1.4	0.72	1.3	1.0	1.0	
Power Dissipation	P_D	1.5	1.0	0.36	0.8	0.8	1.0	W
$T_A = 100^\circ\text{C}$		0.6	0.4	0.14	0.32	0.32	0.4	
Maximum Junction-to-Ambient	R_{thJA}	400	125	350	156	156	125	$^\circ\text{C}/\text{W}$
Operating Junction and Storage Temperature Range	T_J, T_{stg}	−55 to 150						$^\circ\text{C}$

Notes

a. Pulse width limited by maximum junction temperature.

b. Reference case for all temperature testing.

c. $t_p \leq 50 \mu\text{s}$.

Specifications^a

Parameter	Symbol	Test Conditions	Typ ^b	Limits						Unit
				VN10LE VN10LM VN0610LL		VN0605T		VN2222LL VN2222LM		
Static										
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0 \text{ V}, I_D = 100 \mu\text{A}$	70	60				60		V
		$V_{GS} = 0 \text{ V}, I_D = 10 \mu\text{A}$	70			60				
Gate-Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 1 \text{ mA}$	2.1	0.8	2.5	0.8	3.0	0.6	2.5	
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0 \text{ V}, V_{GS} = \pm 20 \text{ V}$			$\pm 100^\text{e}$		± 100		± 100	nA
		$T_J = 125^\circ\text{C}$					± 500			
Zero Gate-Voltage Drain Current	I_{DSS}	$V_{DS} = 50 \text{ V}, V_{GS} = 0 \text{ V}$			10		1.0			μA
		$T_J = 125^\circ\text{C}$			500		500			
		$V_{DS} = 48 \text{ V}, V_{GS} = 0 \text{ V}$						10		
		$T_J = 125^\circ\text{C}$						500		
On-State Drain Current ^c	$I_{D(on)}$	$V_{DS} = 10 \text{ V}, V_{GS} = 10 \text{ V}$	1000	750		500		750		mA
Drain-Source On-Resistance ^c	$r_{DS(on)}$	$V_{GS} = 4.5 \text{ V}, I_D = 50 \text{ mA}$	4.5				7.5			Ω
		$V_{GS} = 5 \text{ V}, I_D = 0.2 \text{ A}$	4.5		7.5				7.5	
		$V_{GS} = 10 \text{ V}, I_D = 0.5 \text{ A}$	2.4		5		5		7.5	
		$T_J = 125^\circ\text{C}$	4.4		9		10		13.5	
Forward Transconductance ^c	g_{fs}	$V_{DS} = 10 \text{ V}, I_D = 0.5 \text{ A}$	230	100				100		mS
		$V_{DS} = 10 \text{ V}, I_D = 0.2 \text{ A}$	180			80				
Common Source Output Conductance ^c	g_{os}	$V_{DS} = 5 \text{ V}, I_D = 50 \text{ mA}$	500							μs

VN10/0605/0610/2222 Series

Specifications^a

Parameter	Symbol	Test Conditions	Typ ^b	Limits						Unit
				VN10LE VN10LM VN0610LL		VN0605T		VN2222LL VN2222LM		
Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
Dynamic										
Input Capacitance	C _{iss}	V _{DS} = 25 V, V _{GS} = 0 V f = 1 MHz	22		60		60		60	pF
Output Capacitance	C _{oss}		11		25		25		25	
Reverse Transfer Capacitance	C _{rss}		2		5		5		5	
Switching^d										
Turn-On Time	t _{ON}	V _{DD} = 15 V, R _L = 23 Ω I _D ≈ 0.6 A V _{GEN} = 10 V, R _G = 25 Ω	7		10				10	ns
Turn-Off Time	t _{OFF}		7		10				10	
Turn-On Time	t _{ON}	V _{DD} = 30 V, R _L = 150 Ω I _D ≈ 0.2 A V _{GEN} = 10 V, R _G = 25 Ω	7				20			
Turn-Off Time	t _{OFF}		11				20			

Notes

a. T_A = 25°C unless otherwise noted.

VNBF06



b. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.

c. Pulse test: PW ≤ 300 μs duty cycle ≤ 3%.

d. Switching time is essentially independent of operating temperature.







e. VN10LE only.

Typical Characteristics (25°C Unless Otherwise Noted)

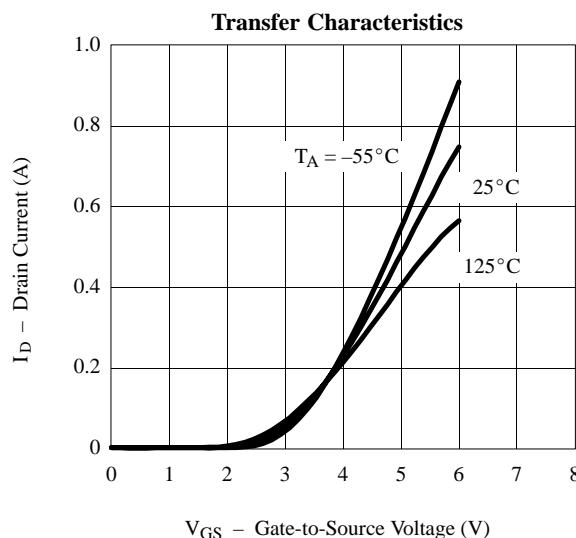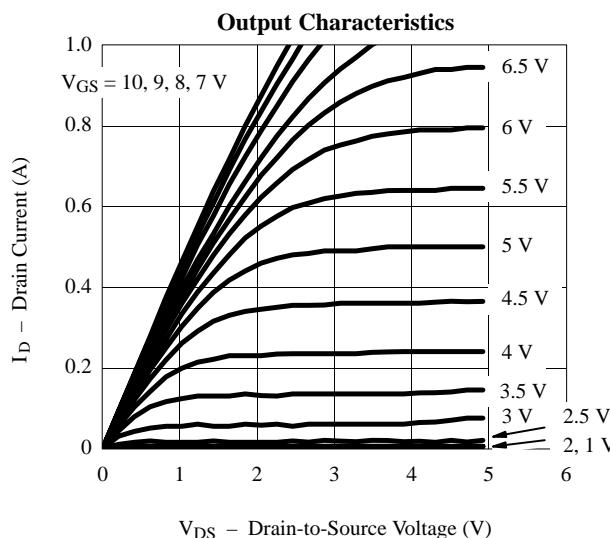

VN10/0605/0610/2222 Series

Typical Characteristics (25°C Unless Otherwise Noted)

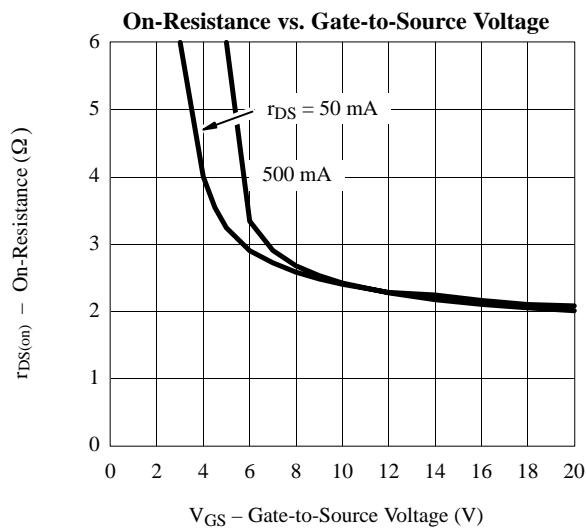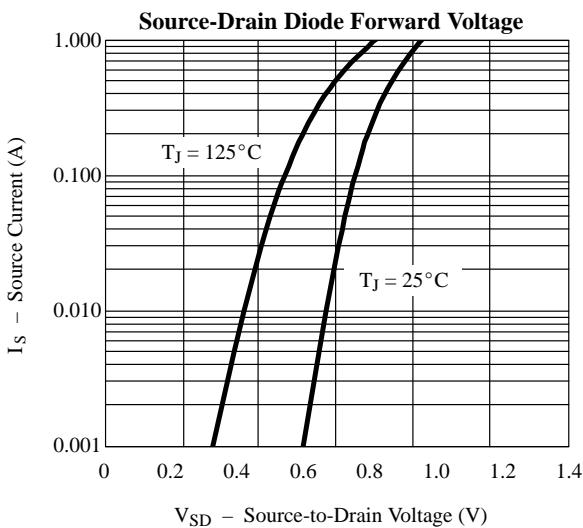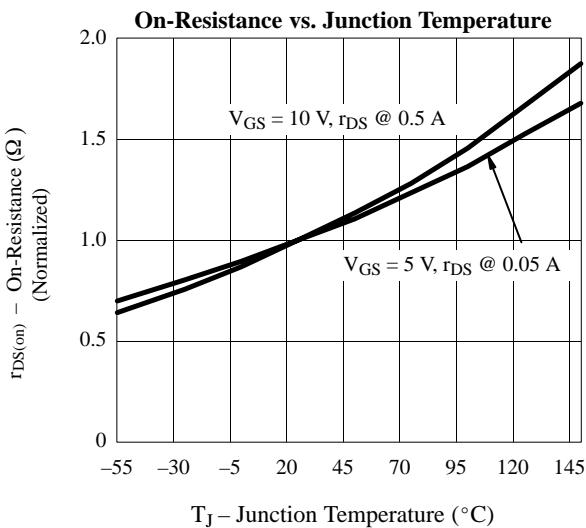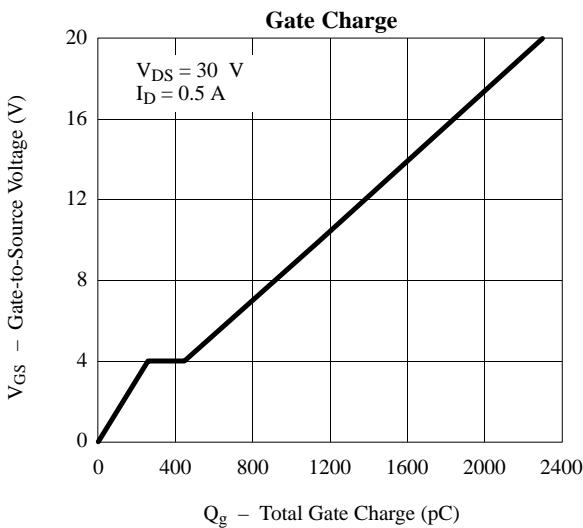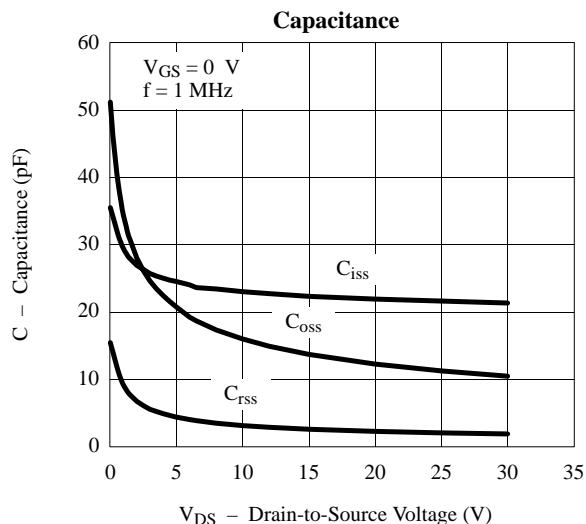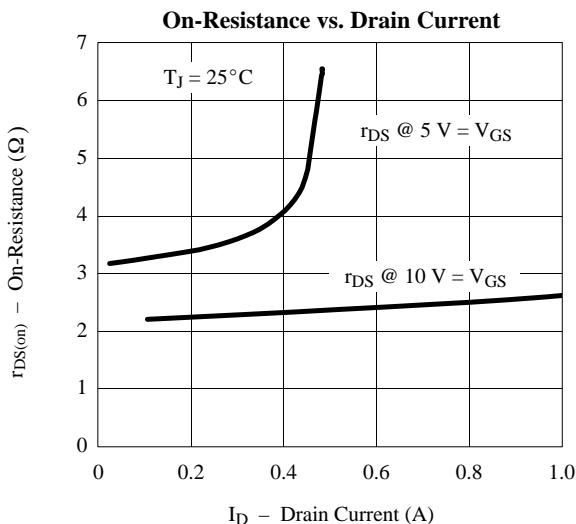

VN10/0605/0610/2222 Series

Typical Characteristics (25°C Unless Otherwise Noted)

