

4 Angled Female Connectors with CAGE CLAMP®, Pin Spacing 5 mm / 0.197 in, Grey

34

Pin spacing 5 mm/0.197 in, grey
0.08 – 2.5 mm² | AWG 28 – 12
250 V/4 kV/3 | 300 V, 15 A
14 A

8 – 9 mm / 0.33 in




* BV NV

Pin spacing 5 mm/0.197 in, grey
0.08 – 2.5 mm² | AWG 28 – 12
250 V/4 kV/3 | 300 V, 15 A
14 A

8 – 9 mm / 0.33 in

* BV NV

For strain relief plates
see page 4.88

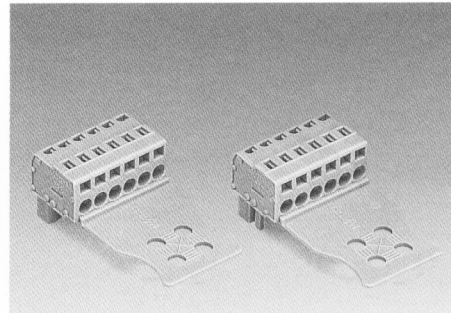
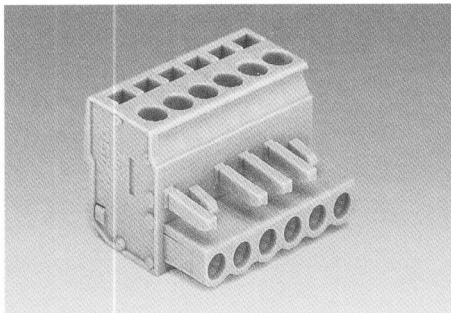
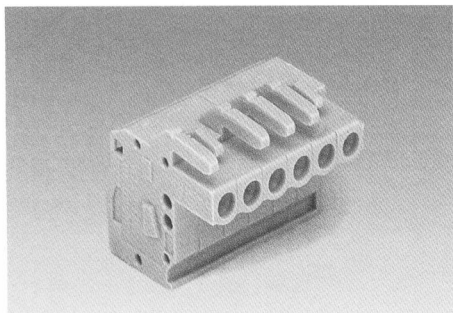


No. of poles	Item-No.	No. of poles	Item-No.	"B"	Additional item-No. for ...
Angled female connectors with CAGE CLAMP®, conductor exit opposite to latches, with coding fingers, with two latches, grey		Angled female connectors with CAGE CLAMP®, conductor exit same direction as latches, with coding fingers, with two latches, grey		... Angled female connectors with CAGE CLAMP® and strain relief plate	
2 (one latch only)	232-102/026-000	2 (one latch only)	232-202/026-000	11.5 mm	.../032-000
3 (one latch only)	232-103/026-000	3 (one latch only)	232-203/026-000	20 mm	.../033-000
4	232-104/026-000	4	232-204/026-000	30 mm	.../034-000
5	232-105/026-000	5	232-205/026-000	50 mm	.../035-000
:	:	:	:	B = width of strain relief plate	
:	:	:	:	Ordering example:	
12	232-112/026-000	12	232-212/026-000	Female connector, pin spacing 5 mm/0.197 in, grey, with strain relief plate	
:	:	:	:	5-pole 232-205/026-000/033-000	
:	:	:	:		
21	232-121/026-000	21	232-221/026-000		
22	232-122/026-000	22	232-222/026-000		
23	232-123/026-000	23	232-223/026-000		
24	232-124/026-000	24	232-224/026-000		

Accessories

	Test plug , w. cable 500 mm/1'7.7" 2 mm/0.079 in Ø, red 210-136 2.3 mm/0.091 in Ø, yel. 210-137		Test plug , w. cable 500 mm/1'7.7" 2 mm/0.079 in Ø, red 210-136 2.3 mm/0.091 in Ø, yel. 210-137
	Insulation stop , 5 pcs/strip 0.08 - 0.2 mm ² ❶ (white) 231-670 0.25 - 0.5 mm ² (light gr.) 231-671 0.75 - 1 mm ² (dark grey) 231-672 ❶ 0.2 mm ² solid/0.14 mm ² stranded		Insulation stop , 5 pcs/strip 0.08 - 0.2 mm ² ❶ (white) 231-670 0.25 - 0.5 mm ² (light gr.) 231-671 0.75 - 1 mm ² (dark grey) 231-672 ❶ 0.2 mm ² solid/0.14 mm ² stranded
	Marker strips , self-adhesive 1-12 (40 x) 249-150/210-218 13-24 (40 x) 249-150/210-219		Marker strips , self-adhesive 1-12 (40 x) 249-150/210-218 13-24 (40 x) 249-150/210-219

Dimensions (in mm) Length = (No. of poles x pin spacing) + 1.5 mm + 0.9 mm

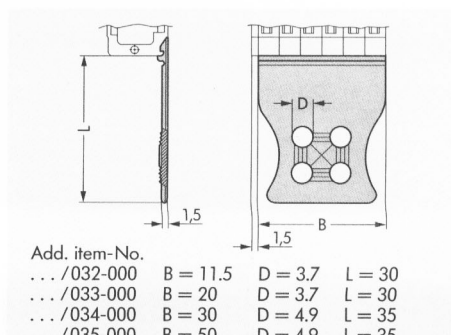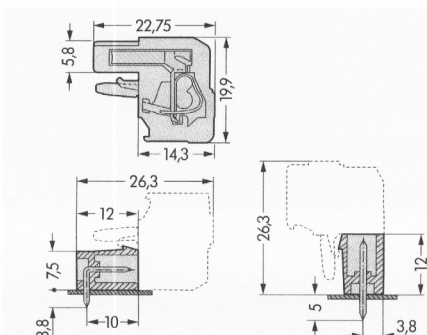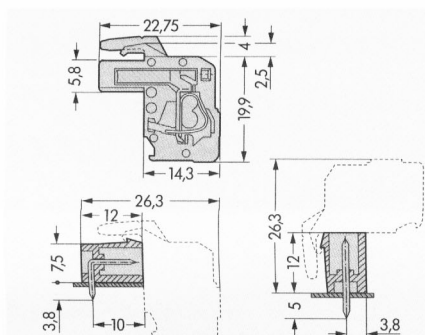

* For further approvals with corresponding ratings see pages 10.3 ff.