



PRODUCT NO	DIM.	LENGTH FORMULAS
50040-XXXXX	DIM A	.100/2.54 X NO. OF COLUMNS + 3.15/80
	DIM B	.100/2.54 X NO. OF COLUMNS + 2.85/72.4
	DIM C	.100/2.54 X NO. OF COLUMNS - .10/.25
	DIM F	.100/2.54 X NO. OF COLUMNS + 2.10/53.3


REVISIONS			
REV	DESCRIPTION	BY	DATE
A			



SECTION U-U



SECTION P-P

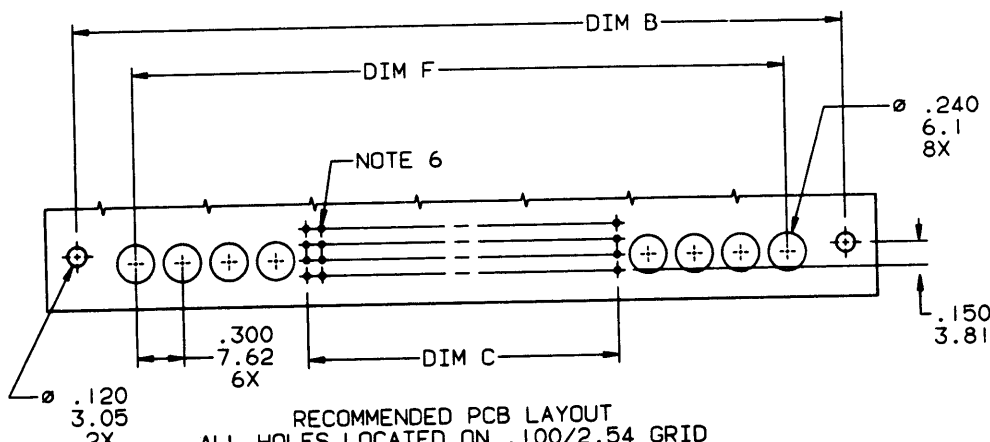

NOTES CONTINUED FROM SHEET 1

- 4 PLATING, CONTACT AREA OPTIONS:
1 = 30μ"/.76μ GOLD 5 = 30μ"/.76μ GXT
3 = 50μ"/1.27μ GOLD 6 = 15μ"/.38μ GOLD
- ⑤ TAIL LENGTH OPTIONS: (LENGTHS REF ONLY)
A = .177/4.5 P = .470/11.94 .062 PCB/SHROUD
C = .533/13.54 L = .188/4.78 .062 PCB
D = .733/18.62 M = .671/17.04 .062 PCB
G = .250/6.35
- ⑥ Ø.0453/1.151 DRILLED HOLE PLATED WITH .0003/.007 MIN SnPb OVER .001/.03 TO .003/.08 Cu. PLATING TO ACHIEVE A Ø.040±.003/1.02±.08 HOLE.
- 7 TO ASSURE PROPER INSTALLATION; DUPONT TOOLING, AS SPECIFIED IN INSTRUCTION MANUAL 155915-001, MUST BE USED. PIN MATING LENGTH WILL BE ±.002/.05 AFTER INSTALLATION.
- ⑧ "DUPONT", DUPONT P/N, AND LOT CODE TO APPEAR ON THIS SURFACE.
- 9 PACKAGING PER BUS-14-143.
- 10 FOR PRODUCT PERFORMANCE SEE DUPONT PRODUCT SPECIFICATION NUMBER BUS-12-090.

SHEET INDEX		ISSUE	-	-											CUSTOMER COPY		DuPont Electronics 							
		SH NO	1	-											CODE IDENT 22526									
MODELS		DO NOT SCALE DRAWING			TOLERANCE UNLESS OTHERWISE NOTED INCH/MM										MATL	DR	DATE	TITLE 4 ROW VERTICAL HEADERS COMPLIANT PRESS FIT PINS 0 GUIDE PIN/8 RND AUX PORTS						
															-	D. SHEAFFER	02/15/91							
															-	CHK	S. CLARK			02/15/91				
															-	ENGR	S. CLARK			02/15/91				
TABULATION SHEETS REQUIRED		YES	NO	THIRD ANGLE PROJECTION			ANGLES 0° ± 2°										APPD	S. CLARK	02/15/91	SCALE	SIZE	DWG NO	CAD	SHEET
																				2/1	C	50040		2