

A

B

C

D

A

B

C

D

TIN LEAD PART NUMBER

CONTACT LENGTH FOR ALL		PART NUMBERS	ITEM
DIM-P ±0.10	DIM-D ±0.25		
5.75 ±0.10	4.25 ±0.25	HM1W59LPR179H0P	62
5.75 ±0.10	11.8 ±0.25	HM1W59LKR179H0P	15

LEAD FREE PART NUMBER

CONTACT LENGTH FOR ALL		PART NUMBERS	ITEM
DIM-P ±0.10	DIM-D ±0.25		
5.75 ±0.10	4.25 ±0.25	HM1W59LPR179H0PLF	62
5.75 ±0.10	11.8 ±0.25	HM1W59LKR179H0PLF	15


- NOTE-1: "EYE OF THE NEEDLE" PRESS-FIT PIN TYPE
NOTE-2: CAVITY FOR CODING KEY MOUNTING AND CABLE CONNECTOR LATCH.
NOTE-3: PCB HOLE DIAMETER = Ø0.65-0.80
NOTE-4: INSERTION TOOLING ON PCB, SEE DRAWING REF C-8626-1023
NOTE-5: PLATING ACCORDING TO BELLCORE SPECIFICATION (4 GAZES).

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8626-000P

European Views

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	ETIEMBRE	1997/01/08	0.X	±0.1	size
Eng	LENOIR	1997/01/08	0.XX	±0.1	A3
Chr	LEGARE	1997/01/08	0.XX' ±2"	0.XXX	±0.1
Appr	LEGARE	1997/01/08	Product family		ECN LS06-0095
				METRAL Spec ref -	
		MILLIPACS-1 5 ROW 360 WAYS		C-8626-0792	
		MALE		Rev. 6	
		catalog no		CUSTOMER sheet 1 of 1	

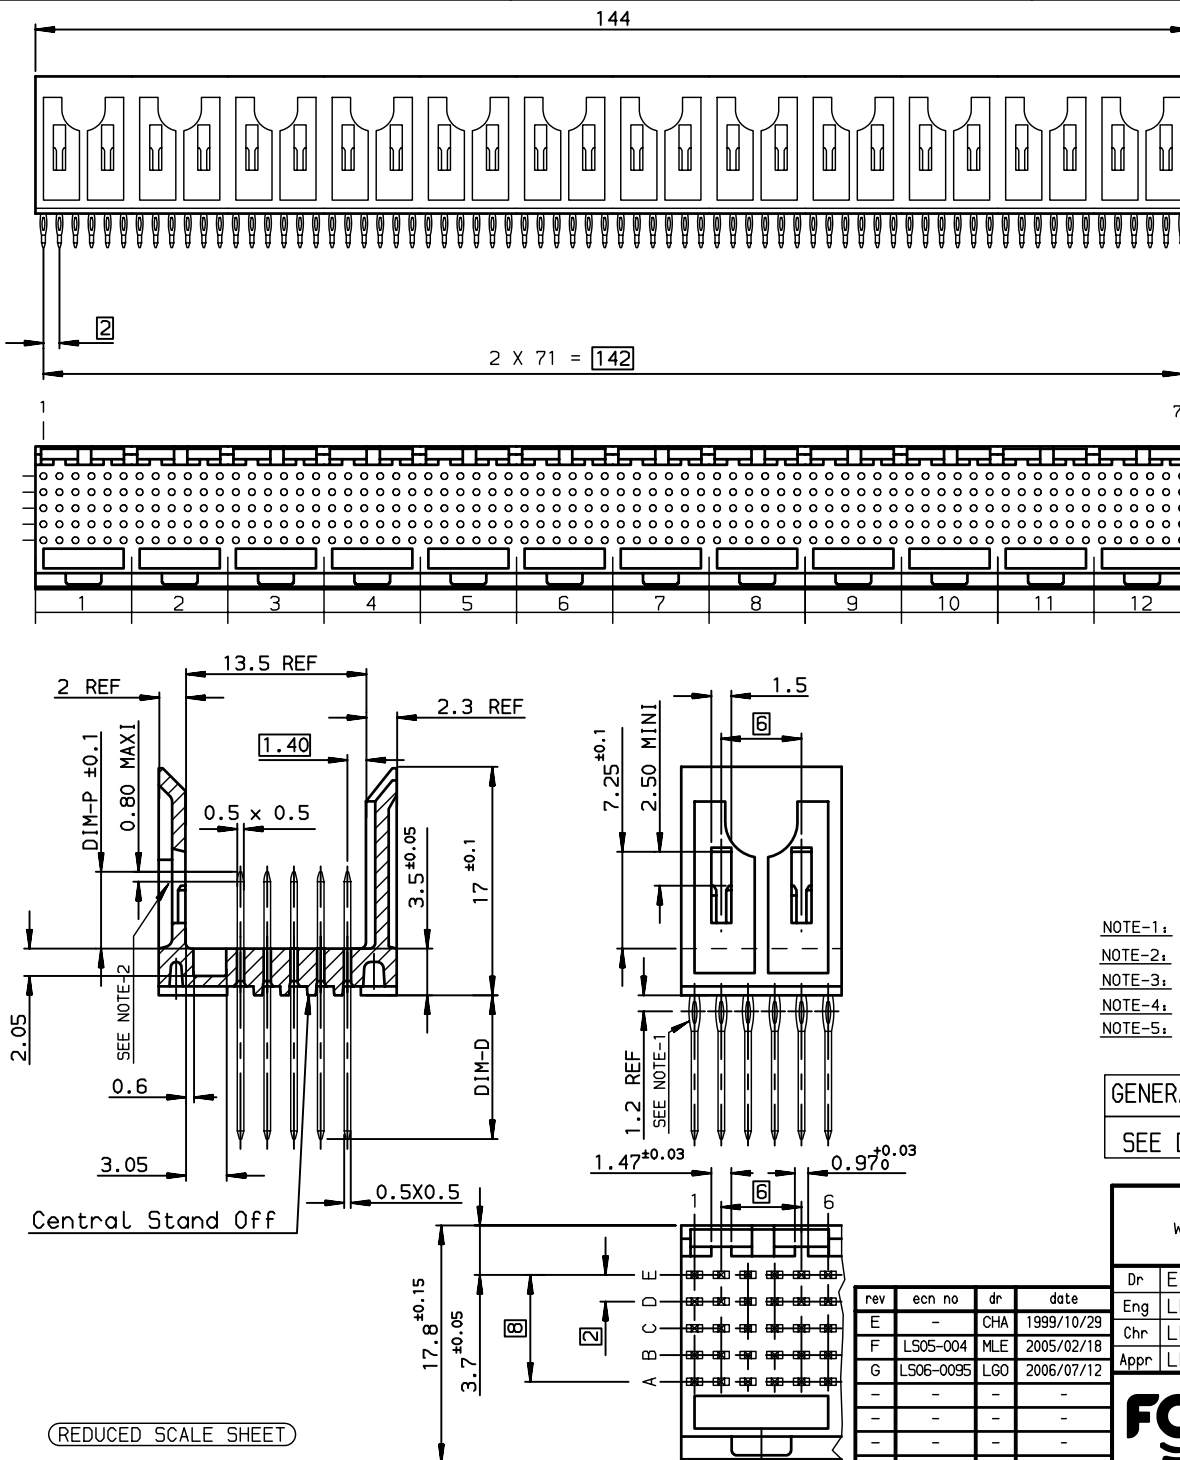

REDUCED SCALE SHEET