


PA663 Series 10-1000 MHz. Cascadable Amplifier

PHOENIX
MICROWAVE CORP.

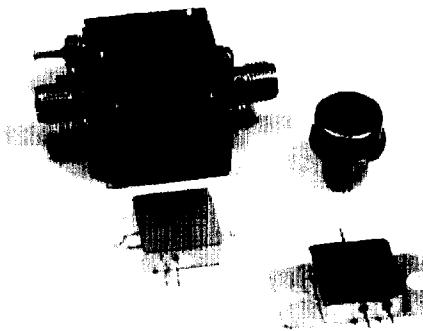

See Short Form Chart and Mechanical Section for available outline drawings.

Features: (typical values)

- High Gain 24.8 dB.
- Low Noise Figure 2.8 dB.
- High Reliability
- Hermetic Package (*Surface Mount available*)

Specifications (Referenced to 50 ohms)

| Parameter | Typical Value | Min. Value | Max. Value | Units |
|--|---------------|------------|------------|-------|
| Frequency | | 10 | 1000 | MHz. |
| Gain | 24.8 | 24.0 | | dB. |
| Gain Flatness | ±0.4 | | ±1.0 | dB. |
| Gain Var. over temp. | 0.6 | | | ΔdB. |
| Pout @ 1dB. comp. | +3.5 | +1.0 | | dBm. |
| Noise Figure | 3.3 | | 4.0 | dB. |
| Reverse Isolation | 35.0 | | | dB. |
| IP ₃ /IP ₂ (two-tone)* | 13/23 | 10/20 | | dBm. |
| HIP2 (2nd harm.) | 28.0 | 25.0 | | dBm. |
| VSWR In/Out | 1.8:1 | | 2.0:1 | |
| Supply Req'd | +15/20 | | +15/30 | v/mA. |

Min. and max. values are from -55°C to +85°C

*IP3 and IP2 are in band output intercept points

Maximum Ratings

- Storage temperature -62°C to +125°C
- DC voltage +17 volts
- RF input power +13.0 dBm.
- Case Temperature +125°C

Typical Performance Curves

- ■ -55°C - ◆ - +25°C - ▲ - +85°C

