



## Surface Mount Transient Voltage Suppressors



DO-214AC (SMA)

PRIMARY CHARACTERISTICS	
$V_{WM}$	5.0 V to 28 V
$P_{PPM}$ (10 x 1000 $\mu$ s)	600 W
$P_{PPM}$ (8 x 20 $\mu$ s)	4000 W
$P_D$ at $T_A = 50^\circ\text{C}$	4 W
$I_{FSM}$	50 A
$T_J$ max.	150 $^\circ\text{C}$

### FEATURES

- Low profile package
- Ideal for automated placement
- Available in uni-directional polarity only
- Excellent clamping capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260  $^\circ\text{C}$
- Solder dip 260  $^\circ\text{C}$ , 40 s
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



RoHS COMPLIANT

### TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive and telecommunication.

### MECHANICAL DATA

**Case:** DO-214AC (SMA)

Molding compound meets UL 94 V-0 flammability rating

Base P/N-E3 - RoHS compliant, commercial grade

**Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix meets JESD 201 class 1A whisker test

**Polarity:** Color band denotes cathode end

MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)				
PARAMETER		SYMBOL	VALUE	UNIT
Peak pulse power dissipation	with 10/1000 $\mu$ s waveform <sup>(1)(2)</sup> with 8/20 $\mu$ s waveform	$P_{PPM}$	600 4000	W
Peak pulse current	with 10/1000 $\mu$ s waveform <sup>(1)(2)</sup> with 8/20 $\mu$ s waveform	$I_{PPM}$	See next table	A
Power dissipation on infinite heatsink, $T_A = 50^\circ\text{C}$		$P_D$	4.0	W
Peak forward surge current 8.3 ms single half sine-wave		$I_{FSM}$	50	A
Operating junction and storage temperature range		$T_J, T_{STG}$	- 55 to + 150	$^\circ\text{C}$

#### Notes:

(1) Non-repetitive current pulse, per Fig. 1 and derated above  $T_A = 25^\circ\text{C}$  per Fig. 2.


(2) Mounted on P.C.B. with 5.0 x 5.0 mm copper pads attached to each terminal

# SMA6J5.0A thru SMA6J28A



Vishay General Semiconductor

ELECTRICAL CHARACTERISTICS	
SYMBOL	PARAMETER
$V_{WM}$	Stand-off voltage
$V_{BR}$	Breakdown voltage
$V_C$	Clamping voltage
$I_D$	Leakage current at $V_{WM}$
$I_{PP}$	Peak pulse current
$\alpha T$	Voltage temperature coefficient
$V_F$	Forward voltage drop
$R_D$	Dynamic resistance

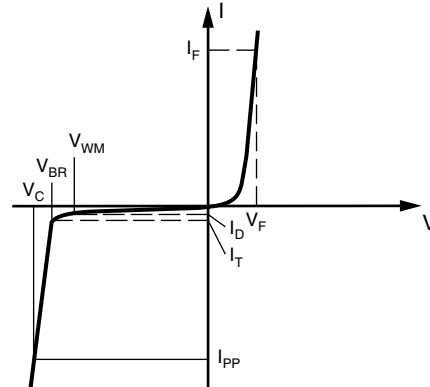

ELECTRICAL CHARACTERISTICS ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)														
DEVICE	DEVICE MARKING CODE	BREAKDOWN VOLTAGE $V_{BR}$ AT $I_T$ (1)			MAXIMUM REVERSE LEAKAGE $I_D$ AT $V_{WM}$			$V_C$ AT $I_{PP}$		$R_D$ (2)	$V_C$ AT $I_{PP}$		$R_D$ (2)	$\alpha T$ (3)
		MIN.	MAX.		25 °C	85 °C		10/1000 $\mu\text{s}$			8/20 $\mu\text{s}$			MAX.
								V	A		V	A		
SMA6J5.0A	6AE	6.40	7.07	10	150	375	5.0	9.1	65.9	0.031	13.4	298	0.021	5.7
SMA6J6.0A	6AG	6.70	7.41	10	600	1500	6.0	9.5	63.2	0.033	13.7	290	0.022	5.9
SMA6J6.5A	6AK	7.20	7.96	10	100	250	6.5	10.2	58.8	0.038	14.5	276	0.024	6.1
SMA6J7.5A	6AP	8.33	9.21	1	50	125	7.5	11.8	50.8	0.051	17.0	235	0.033	6.5
SMA6J8.0A	6AR	8.89	9.83	1	20	50	8.0	12.5	48.0	0.056	18.2	220	0.038	7.0
SMA6J8.5A	6AT	9.4	10.4	1	20	50	8.5	13.3	45.1	0.064	18.7	205	0.040	7.3
SMA6J10A	6AX	11.1	12.3	1	0.2	1	10	15.7	38.2	0.089	19.6	184	0.040	7.8
SMA6J11A	6AZ	12.2	13.5	1	0.2	1	11	17.2	34.8	0.107	21.5	172	0.047	8.1
SMA6J12A	6BE	13.3	14.7	1	0.2	1	12	18.8	31.9	0.128	23.5	157	0.056	8.3
SMA6J13A	6BG	14.4	15.9	1	0.2	1	13	20.4	29.4	0.153	23.9	147	0.054	8.4
SMA6J15A	6BM	16.7	18.5	1	0.2	1	15	23.6	25.4	0.201	27.7	123	0.075	8.8
SMA6J16A	6BP	17.8	19.7	1	0.2	1	16	25.2	23.8	0.229	29.5	119	0.083	8.8
SMA6J17A	6BR	18.9	20.9	1	0.2	1	17	26.7	22.5	0.259	31.4	111	0.094	9.0
SMA6J18A	6BT	20.0	22.1	1	0.2	1	18	28.3	21.2	0.292	33.2	102	0.109	9.2
SMA6J20A	6BV	22.2	24.5	1	0.2	1	20	31.4	19.1	0.361	36.8	93	0.132	9.4
SMA6J22A	6BX	24.4	26.9	1	0.2	1	22	34.5	17.4	0.437	40.4	89	0.152	9.5
SMA6J24A	6BZ	26.7	29.5	1	0.2	1	24	37.8	15.9	0.523	44.3	80	0.185	9.6
SMA6J26A	6CE	28.9	31.9	1	0.2	1	26	40.9	14.7	0.614	47.9	75	0.213	9.7
SMA6J28A	6CG	31.1	34.4	1	0.2	1	28	44.0	13.6	0.704	51.6	68	0.253	9.8

**Notes:**

- (1) Pulse test:  $t_p \leq 50\text{ ms}$
- (2) To calculate maximum clamping voltage at other surge currents, use the following formula  

$$V_{CLmax} = R_D \times I_{PP} + V_{BRmax}$$
- (3) To calculate  $V_{BR}$  vs. junction temperature, use the following formula  

$$V_{BR} \text{ at } T_J = V_{BR} \text{ at } 25\text{ }^\circ\text{C} \times (1 + \alpha T \times (T_J - 25))$$
- (4)  $V_F = 3.5\text{ V}$  at  $I_F = 25\text{ A}$ , pulse test: 300  $\mu\text{s}$  pulse width



THERMAL CHARACTERISTICS ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Typical thermal resistance, junction to ambient <sup>(1)</sup>	$R_{\theta JA}$	120	$^\circ\text{C/W}$
Typical thermal resistance, junction to lead	$R_{\theta JL}$	25	$^\circ\text{C/W}$

Note:

(1) Mounted on minimum recommended pad layout

ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
SMA6J5.0A-E3/61	0.064	61	1800	7" diameter plastic tape and reel
SMA6J5.0A-E3/5A	0.064	5A	7500	13" diameter plastic tape and reel

RATINGS AND CHARACTERISTICS CURVES

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

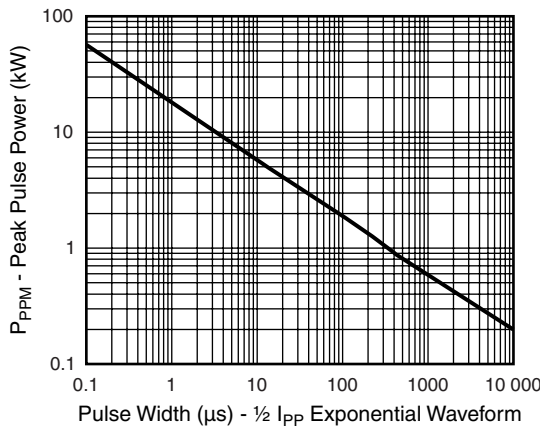


Figure 1. Peak Pulse Power Rating Curve

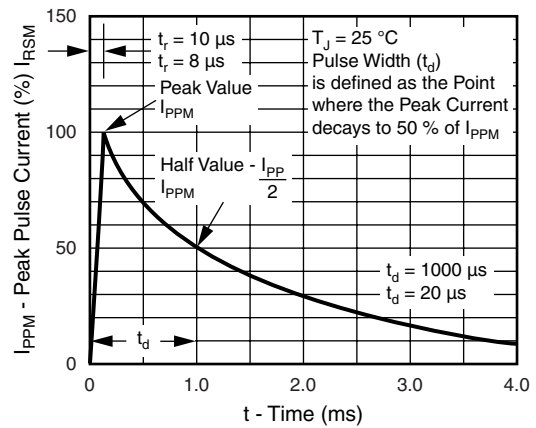


Figure 3. Pulse Waveform

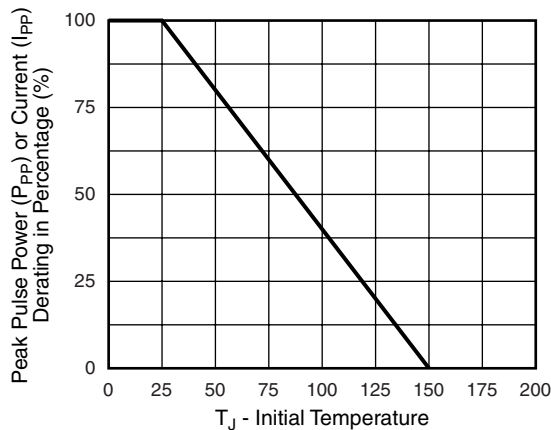


Figure 2. Pulse Power or Current vs. Initial Junction Temperature

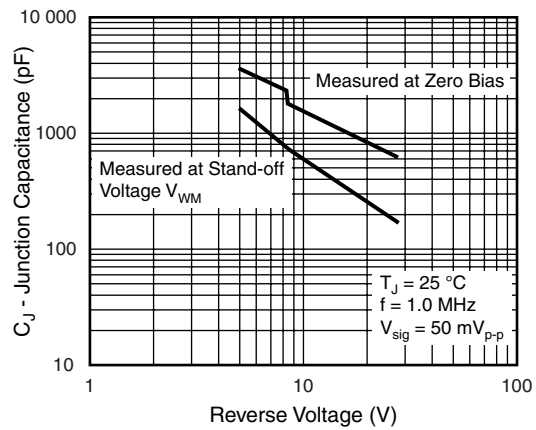


Figure 4. Typical Junction Capacitance

# SMA6J5.0A thru SMA6J28A

Vishay General Semiconductor

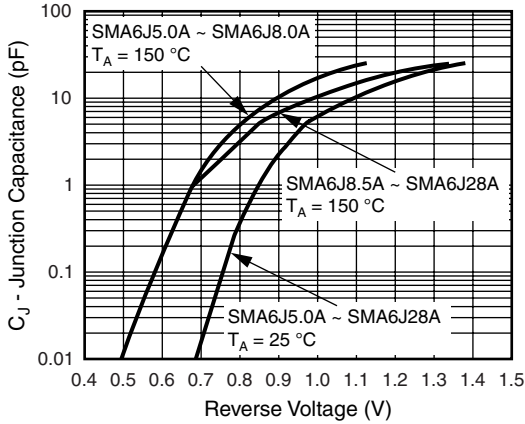


Figure 5. Typical Forward Characteristics


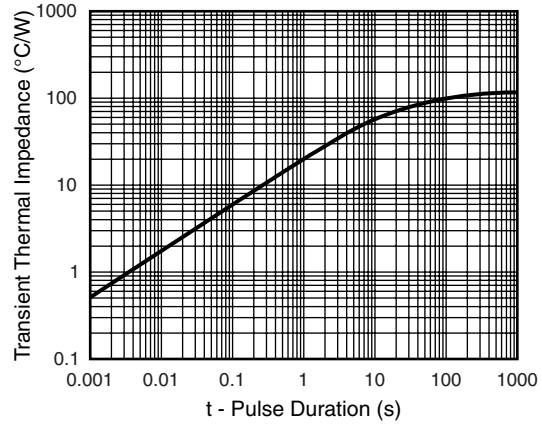



Figure 6. Typical Transient Thermal Impedance

## PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

### DO-214AC (SMA)

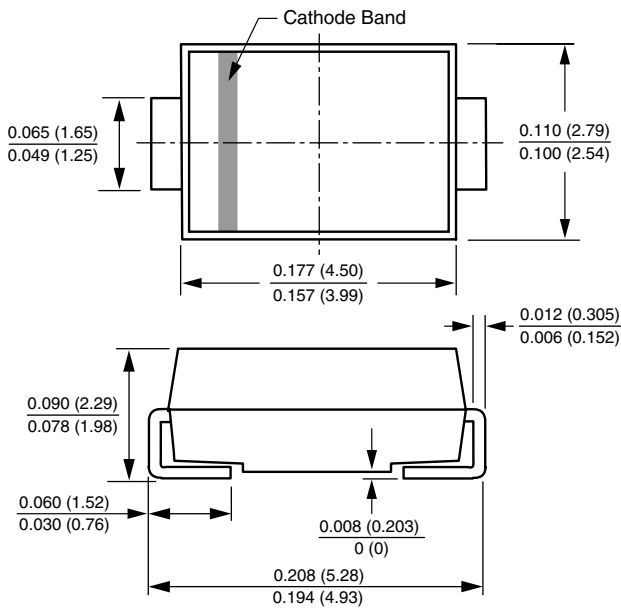

### Mounting Pad Layout

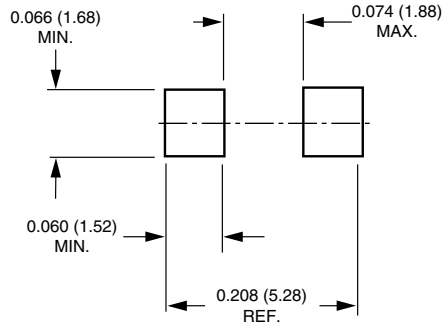



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.