



A SUBSIDIARY OF **UNITRODE** CORPORATION
 POWERCUBE CORPORATION, EIGHT SUBURBAN PARK DRIVE,
 BILLERICA, MASSACHUSETTS 01821 • (617) 667-9500

12CME50
60 Watt
ICECUBE™

Current Mode
DC-DC Converter


"Better Always/By Design"

PRELIMINARY

Features:

- Designed for AC to DC Applications from Rectified 1 ϕ 115 (NOM) VAC
- Current Mode Control
- Power MOSFET Design
- 75% Efficiency
- MIL-STD-704A Positive Input Transient Protected

12V @ 5A
 OUTPUT

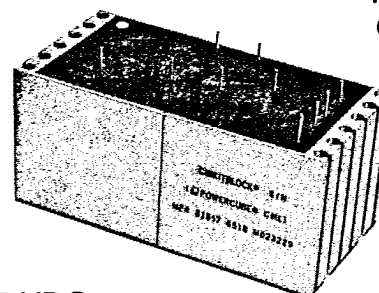

INPUT
 100-165 VDC


60 Watt ICECUBE

Powercube's new 12CME50 is a rugged miniaturized current mode control switching regulator providing fully isolated high efficiency power conversion from 100 to 165 VDC (115 NOM. VAC, single-phase, rectified). Excellent transient response is achieved. Pulse by pulse current limiting and


100kHz switching are features of this state-of-the-art design. These units are parallelable to achieve higher total power out (consult Powercube when paralleling more than 2 units). Other features are continuous overload and short circuit protection, over voltage zener protection, $\pm$ remote sense and remote on/off control.

— OTHER OUTPUT VOLTAGES AVAILABLE —

FUNCTIONAL BLOCK DIAGRAM:

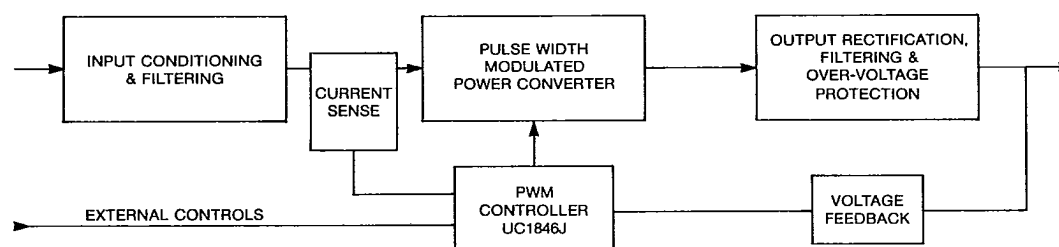

SIMPLIFIED ELECTRICAL SCHEMATIC:

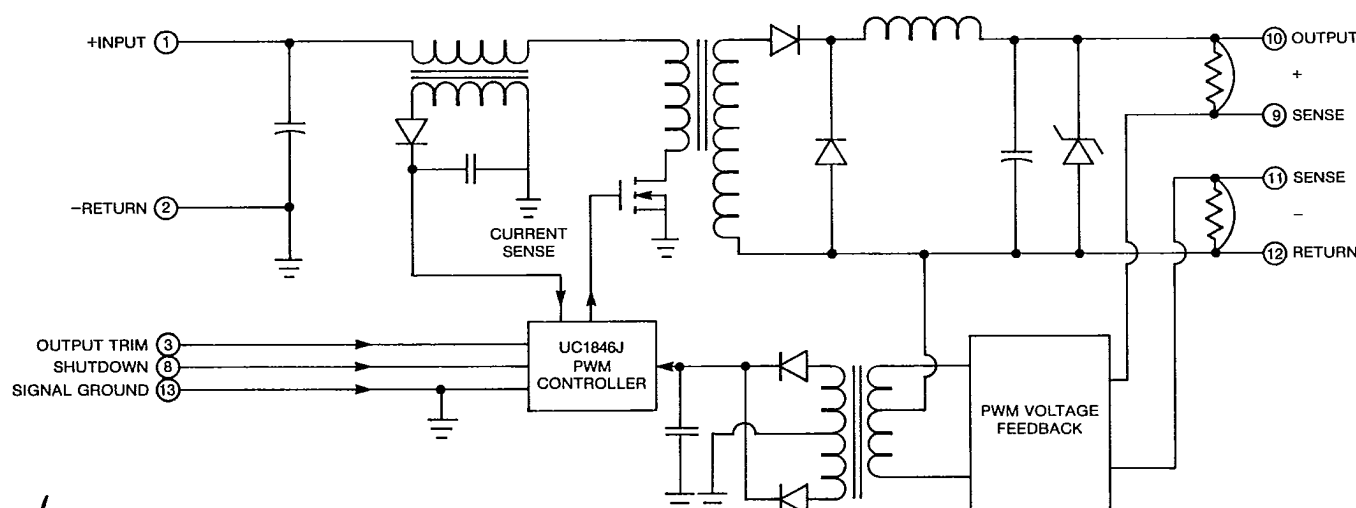


12CME50**60 Watt ICECUBE™****Current Mode DC-DC Converter****SPECIFICATIONS:****ELECTRICAL:**

Input:	100-165 VDC (or rectified 95-132 VAC with MIL-STD-704A Positive Transients)
Output Voltage:	12.0 VDC
Setting:	±1%
I _{OUT} :	5.0 Amps
Temperature Coefficient:	±.015%/°C (for output voltage)
Turn-On Overshoot:	5% any input voltage, 10% to full load, full temperature range
Efficiency:	75% (see curves)
Line Regulation:	0.4% Max. at F.L.
Load Regulation:	0.5% Max. for 10% to F.L.
Output Ripple:	60mV P-P, 10% to F.L.
Transient Response:	-150mV Max., 25% to 75% load +150mV Max., 75% to 25% load Return to within 1% of V _{Nom} within 100μs
Stability:	54° Phase Margin, 10 dB Gain Margin typical. Crossover frequency 10.5kHz (curves available)
EMI:	Meets MIL-STD-461B CE03 Part 4 when operated with Powercube XF730 filter (optional extra module)
Isolation:	Pin to case, 500 VDC Min. input to output 1500 VDC

ENVIRONMENTAL:

Temperature Range:	-55°C to +100°C (baseplate) operating -65°C to +125°C storage
Thermal Shock:	MIL-STD-202, Method 107D Cond. B
Humidity:	MIL-STD-810, Method 507.1 Proc. 1
Vibration:	MIL-STD-202, Method 204C Cond. D and 214 Cond. J (operating)
Shock:	MIL-STD-202, Method 213B Cond. A (operating)
Acceleration:	MIL-STD-202, Method 212A Cond. A 100 G's (operating)
Pressure/Altitude:	MIL-STD-202, Method 105C Cond. D (operating)
Sand/Dust:	MIL-STD-810, Method 510 Proc. L
Salt Spray:	MIL-STD-202, Method 101D Cond. D
WEIGHT:	22 oz. Max.

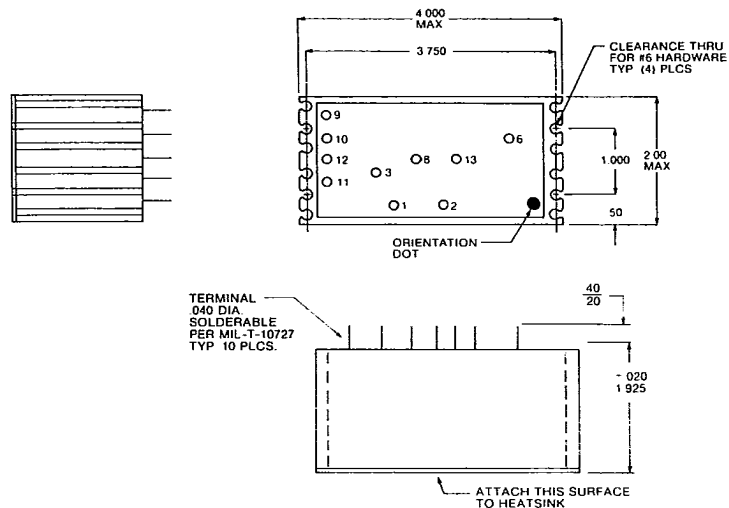DIMENSIONAL DRAWING:

Powercube® and Icecube™ are registered trademarks of
Powercube Corporation

2

**Designed for AC to DC Application
When Used With Powercube (or Customer-Furnished)
Bridge Rectifier Modules**
(See Last Page for Examples)

TYP. EFFICIENCY VS. INPUT VOLTAGE AT T = 25°C

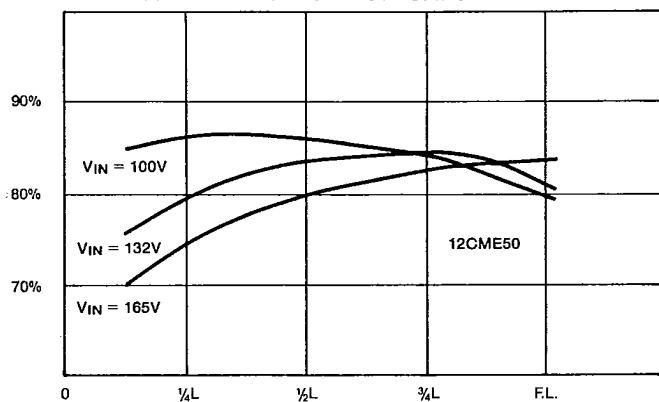


FIGURE 1

TYP. EFFICIENCY VS. INPUT VOLTAGE AT T = 100°C

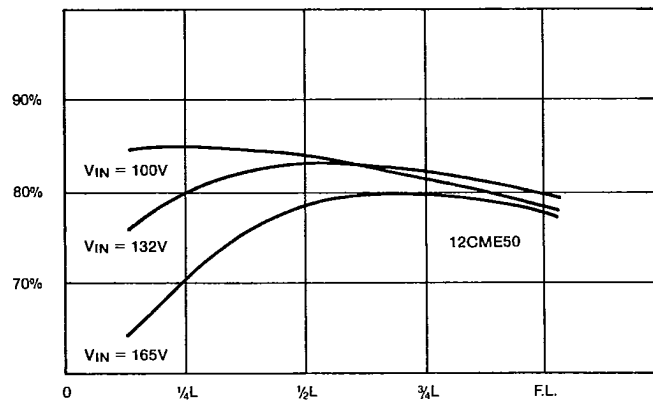


FIGURE 2

TYP. EFFICIENCY VS. INPUT VOLTAGE AT T = -55°C

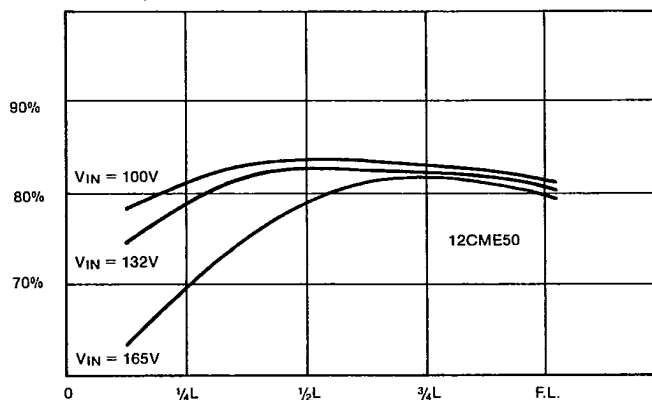


FIGURE 3

COMBINED LOAD (.1L TO 1.0 F.L.) & LINE REG. VS. TEMP.

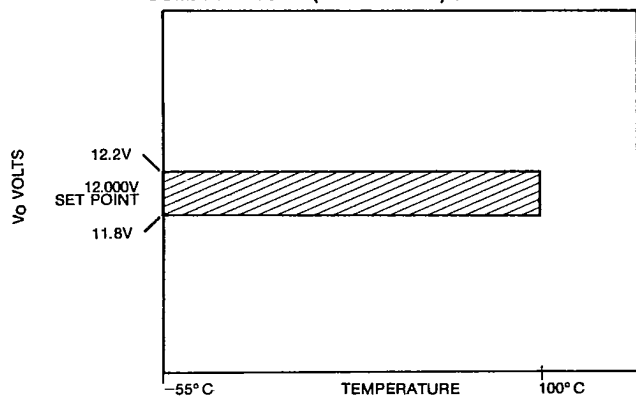


FIGURE 4

CLOCK FREQUENCY VARIATION VS. TEMP.


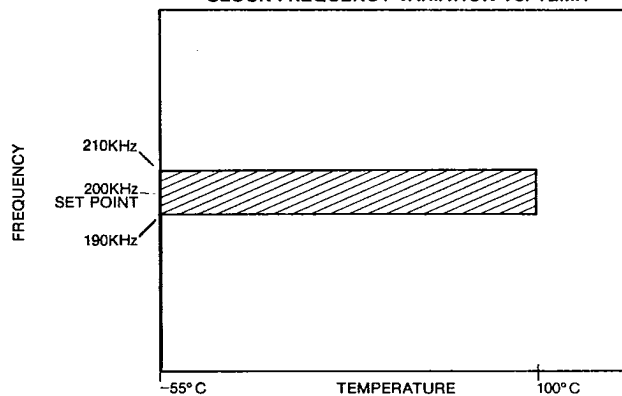


FIGURE 5

3

TYPICAL APPLICATIONS FROM 115 VAC INPUT (MIL-STD-704A)

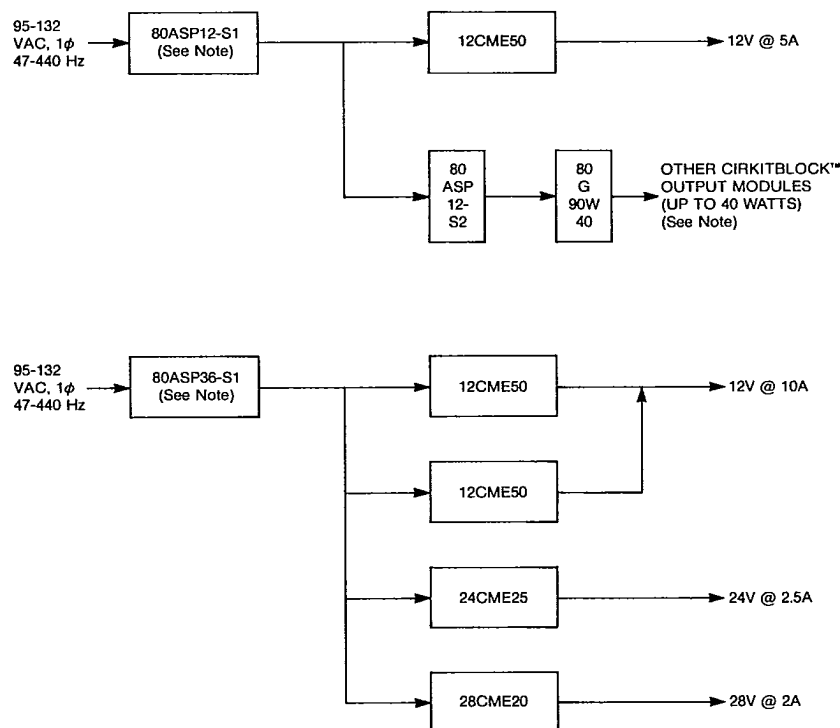

NOTE: For full particulars re: 80ASP12-S1, 80ASP36-S1, 80ASP12-S2, 80G90W40 and other CIRKITBLOCK Modules, refer to POWERCUBE® GOLDLINE™ Catalog.



A SUBSIDIARY OF UNITRODE CORPORATION

POWERCUBE CORPORATION, EIGHT SUBURBAN PARK DRIVE,
BILLERICA, MASSACHUSETTS 01821 • (617) 667-9500

TWX-710-347-6792

“Better Always/By Design”

PRINTED IN U.S.A.