


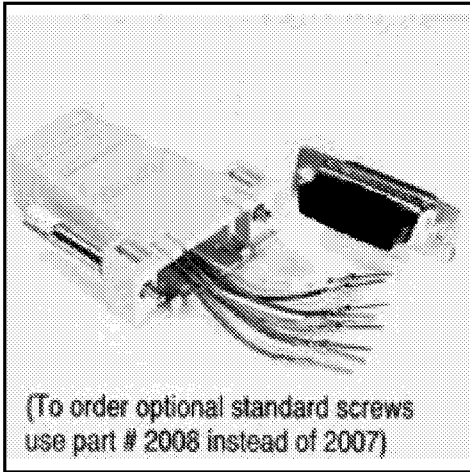

2007 - [*] - []** (Plastic type)

2007MT - [*] - []** (Metalized plastic type)

*Size; options are: **4, 6, 8**

*RJ-Size; options are:

4 = 6 positions with 4 contacts

6 = 6 positions with 6 contacts

8 = 8 positions with 8 contacts

**Gender; Options are:


M = male **F** = female

ELECTRICAL:

- Current rating: Modular jack 1.5 AMP
D-Subminiature .5 AMP
- Insulation resistance: Modular jack 500 Megohms minimum
D-Subminiature 1000 Megohms minimum
- Dielectric withstanding voltage: Modular jack 1000 VAC
D-Subminiature 1000VAC
- Contact resistance: Modular jack 15 milliohms maximum
D-Subminiature 15 milliohms maximum

MATERIAL:

- Housing: UL94V-0 / PBT glass filled
- Conductor: Phosphor bronze
- Finish: 6μ" Hard gold plating on contact area over 50μ" nickel underplate
- Standard with thumbscrews
- Pre-wired to your design or kit styles

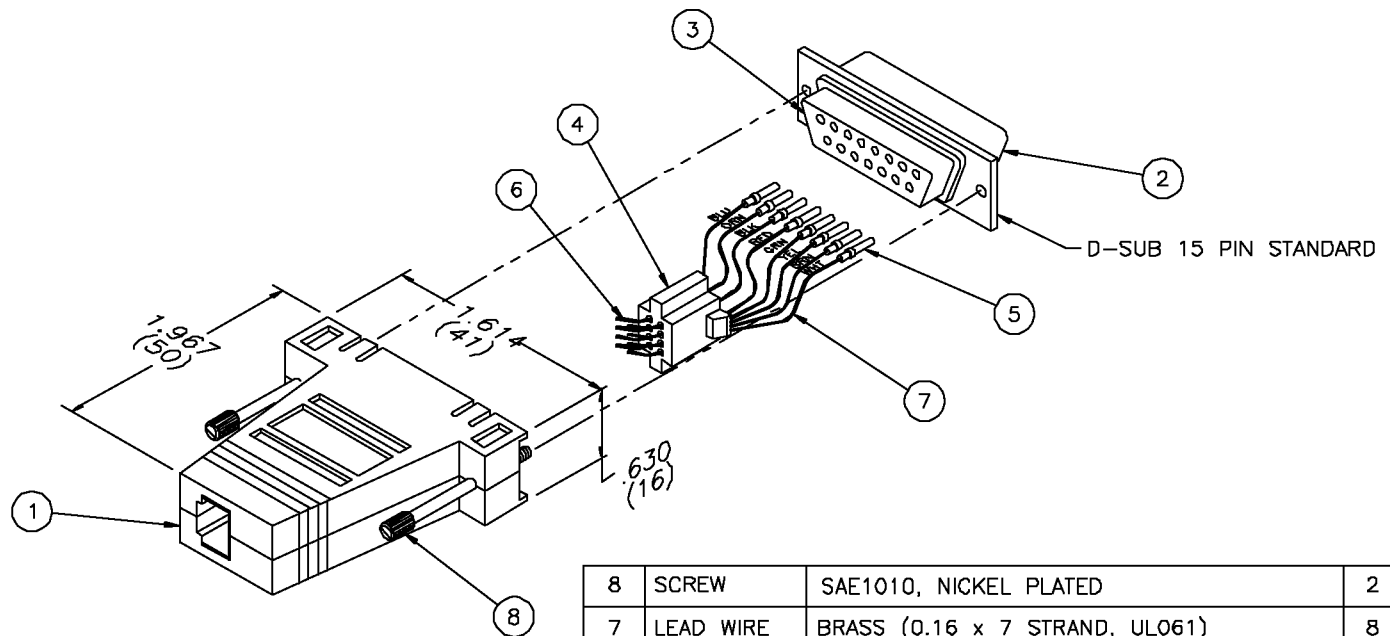

8	SCREW	SAE1010, NICKEL PLATED	2
7	LEAD WIRE	BRASS (0.16 x 7 STRAND, UL061)	8
6	SPRING WIRE	PHOSPHOR BRONZE 6u" HARD GOLD PLATING	8
5	TERMINAL	PHOSPHOR BRONZE 6u" HARD GOLD PLATING	8
4	INSERT	A.B.S.	1
3	HOUSING	P.B.T. PLASTIC	1
2	SHELL	LOW CARBON STEEL, TIN PLATED	1
1	HOOD	NORLY PS1005 & R190 & H225 (Available MT - ABS Nickel Plating)	1
ITEM	DESCRIPTION	MATERIAL	QTY