






3P AC OUTLET RECEPTACLE




MODEL NO	NEW	2AC-141	SERIES
	OLD	AC-141	SERIES

ORDERING CODE: 2AC-141 40


PANEL CUT OUT DIM.
(THICKNESS SEE TABLE)






Insulation Resistance: 5000M Ω Min.
Dielectric Strength: 2000V Min.
Operating Temperature: 65°C
15A 250V: UL,CSA.
10A 250V: VDE,SEV.

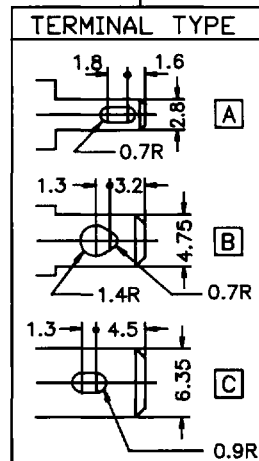

PART NUMBER	PANEL THICKNESS	DIM 'A'
30	3.0	3.16
25	2.5	2.65
23	2.3	2.44
20	2.0	2.14
18	1.8	1.94
15	1.5	1.63
13	1.3	1.43
10	1.0	1.12



(HOT TYPE)

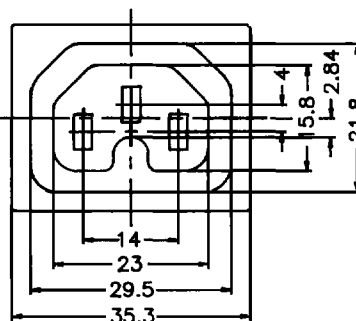


SEE TERMINAL TABLE


MODEL NO	NEW	2AC-015	SERIES
	OLD	AC-015	SERIES

ORDERING CODE: 2AC-015 40

PANEL CUT OUT DIM.
(THICKNESS SEE TABLE)



Insulation Resistance: 500M Ω Min.
Dielectric Strength: 2000V Min.
Operating Temperature: 120°C
15A 250V: CSA
10A 250V: UL

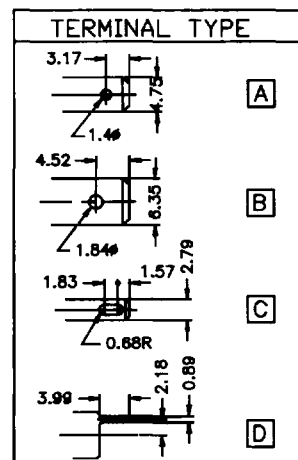

PART NUMBER	PANEL THICKNESS	DIM 'A'
30	3.0	3.33
25	2.5	2.79
23	2.3	2.44
20	2.0	2.23
18	1.8	1.95
15	1.5	1.7
13	1.3	1.4
10	1.0	1.14