

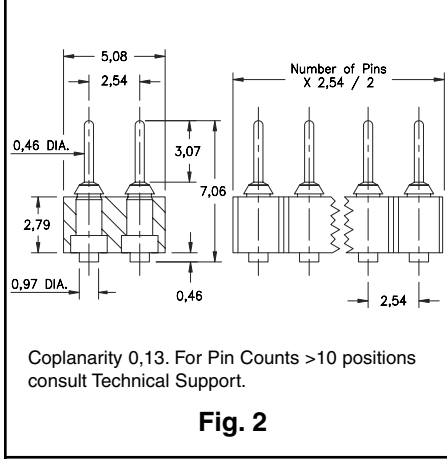


- Series 329 and 429 pin interconnects offer vertical Surface Mount MM #2956-X solder tails. See page 185 for details.
- Series 340 Surface mount sockets use MM #4078 pins. Series 414 sockets use MM #1434 pins. See pages 133 and 138 for details.
- Series 340 and 414 receptacles use Hi-Rel, 4-finger BeCu #30 contacts rated at 3 amps. Receptacles accept 0,38 - 0,64 diameter pins. See page 218 for details.
- Insulators are high temp. thermoplastic.

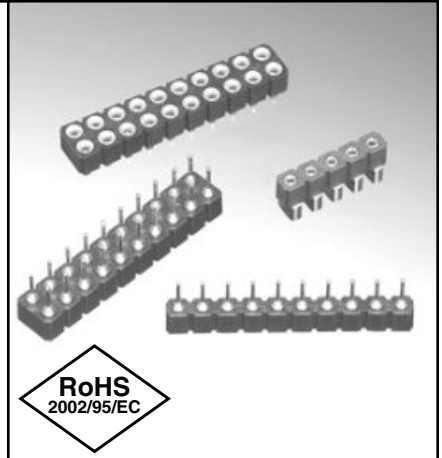

Ordering Information	
Fig. 1	Series 329...560 Surface Mount Pin Header 329-10-1 _ _ -00-560000 Specify # of pins → 02-64
	Series 429...560 Surface Mount Pin Header 429-10-2 _ _ -00-560000 Specify # of pins → 04-72

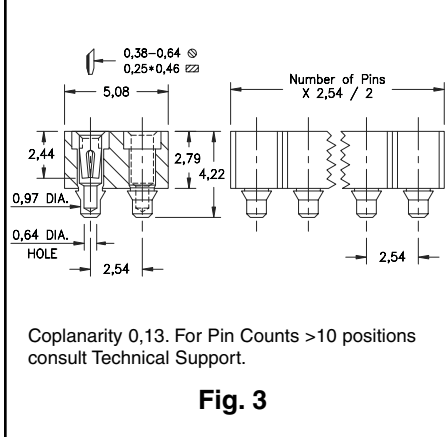

<i>For Electrical, Mechanical & Environmental Data, See pg. 4</i>		<i>For RoHS compliance select ◊ plating code.</i>	
PLATING CODE =	10 ◊		
Pin Plating	0,25µm Au		

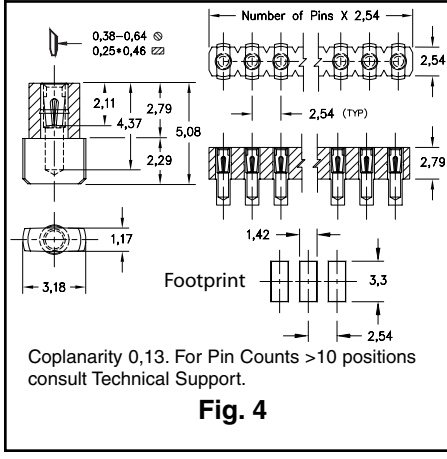


Fig. 3	Series 414...117 Surface Mount Socket 414-43-2 _ _ -41-117000 Specify # of pins → 04-72
	Series 340...780 Surface Mount Socket 340-43-1 _ _ -30-780100 Specify # of pins → 02-64

<i>For Electrical, Mechanical & Environmental Data, See pg. 4</i>		<i>For RoHS compliance select ◊ plating code.</i>	
PLATING CODE =		43 ◊	
Sleeve (Pin)			5,08µm Sn
Contact (Clip)			0,76µm Au