

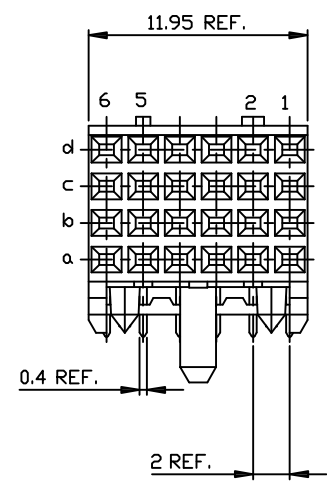



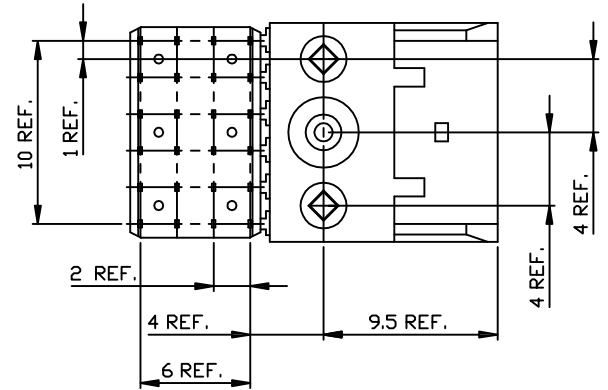


All rights strictly reserved. Reproduction or use in any form without written authority from FCI is prohibited.  
Tous droits strictement réservés. Reproduction ou utilisation sans autorisation écrite de FCI est interdite.

PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM'A"
70227-X01/X01LF	1.6	2.90
70227-X11/X11LF	2.4	3.53

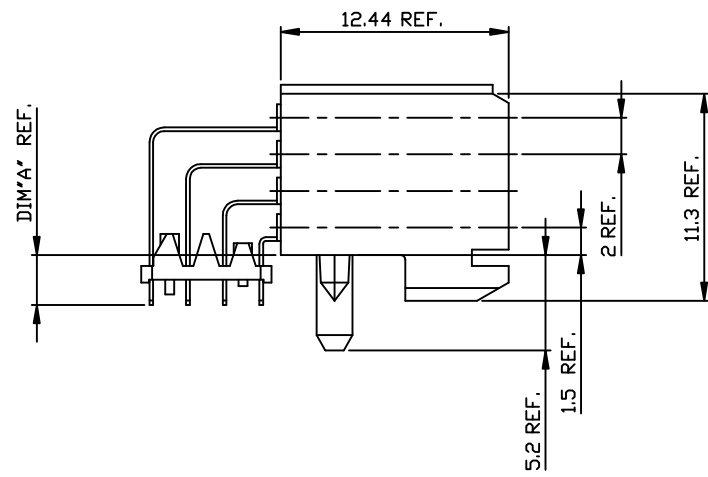

PRODUCT AFTER HOT RIVETTING.

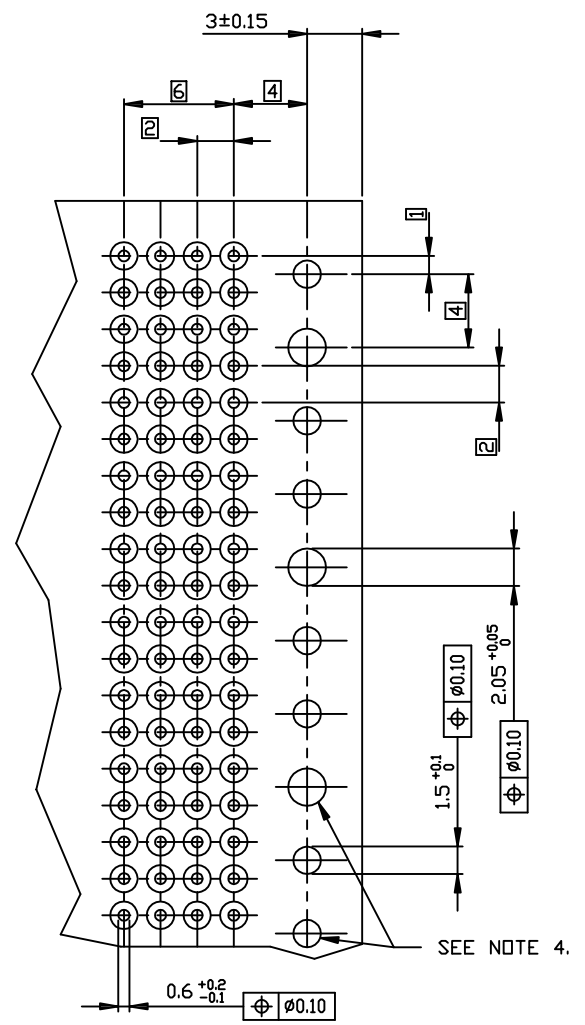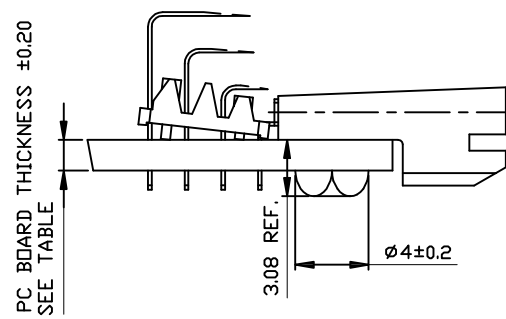

RECOMMENDED HOLE PATTERN, COMPONENT SIDE.

- NOTES:
- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS  
FLAME RETARDANT ACC. UL 94-V0
  - 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
  - 3 PLATING SOLDER TAILS 2-8µm SnPb 90-97 OR 2-8 µm PURE Sn
  - 4 INDICATED HOLES ARE UNPLATED.
  - 5 PRODUCT MARKING: PART NUMBER & BATCH ID.
  - 6 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
  - 7 THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.





PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL:
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL
-9YY/9YYLF	TELCORDIA CO

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI	
l	tr	ec	n	n	d	r	a
K	0004-0004	CLW	041221	linear		projection	title
L	0006-0477	Cwh	11/17/06	angles		size	no
M	0007-0168	Cwh	05/10/07			product family	METAL(tn)
G	V70769	DOB	970602	engr	H. Bouknecht	940308	code
H	V00578	LLA	000316	chr	A. van Zanten	900918	213
J	V00847	LLA	000530	appd	H. v. Voensel	900918	sheet
sheet	revision	M	M				1 of 3
Index	sheet	1	2	3			




All rights strictly reserved. Reproduction or use in any form without written permission of FCI is prohibited. FCI is the owner of all rights in this document.

PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
70227-X02/X02LF	1.6	2.90
70227-X12/X12LF	2.4	3.53

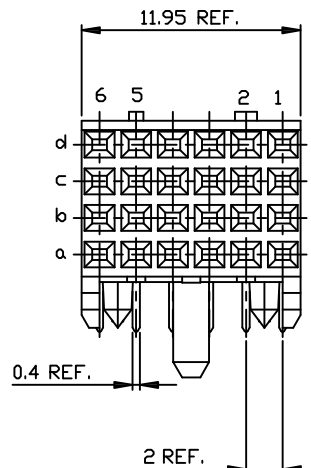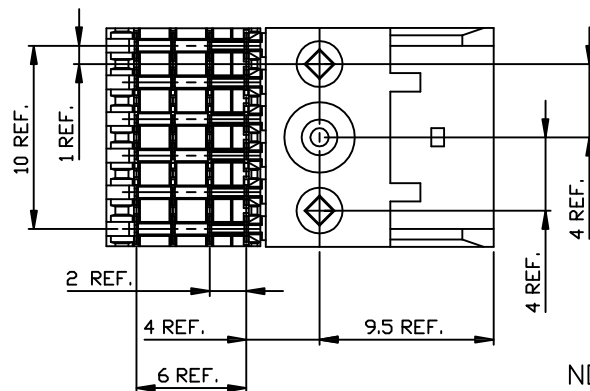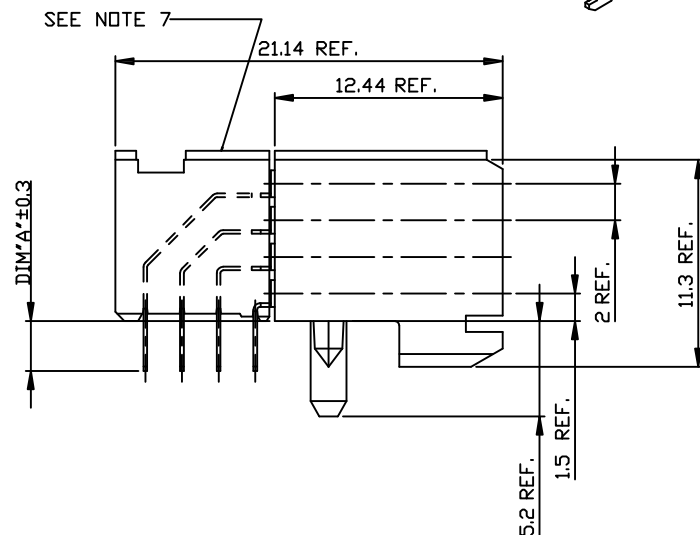


PC BOARD THICKNESS ±0.20  
SEE TABLE

PRODUCT AFTER HOT RIVETTING.

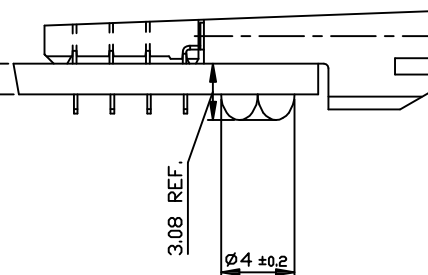

14.64 REF. SEE NOTE 6

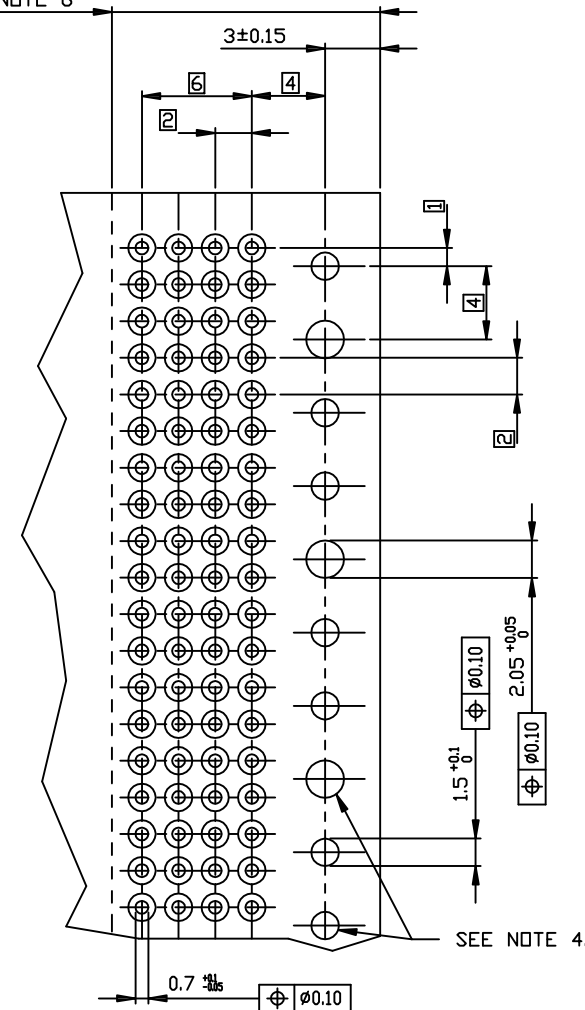

RECOMMENDED HOLE PATTERN,  
COMPONENT SIDE.

#### NOTES:

- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS  
FLAME RETARDANT ACC. UL 94-V0
- 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 PLATING SOLDER TAILS 2-8  $\mu$ m SnPb 90-97 OR 2-8  $\mu$ m PURE Sn
- 4 INDICATED HOLES ARE UNPLATED.
- 5 PRODUCT MARKING: PARTNUMBER & BATCH ID.
- 6 SET BACK FOR PRESS BLOCK.
- 7 TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO  
0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE  
TAIL LENGTH BEFORE APPLICATION TO A BOARD
- 8 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER  
COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 9 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK  
TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER  
APPLICATION.

#### PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL:
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL
-9YY/9YYLF	TELCORDIA CO

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI	
ltn	ecn	no	date	linear	projection	title	www.fciconnection
M						RA FEMALE SIGNAL STB 12 mm VERSION	
				angles		product family METAL(tn)	code
				dr. J. de Bl.	970529	size/dwg no	213
				engr. P. Schalk	970529	scale	sheet
				chr. P. Schalk	970529	5d	2 of ~
				appl. Coolmans	970529		
sheet	revision						
Index	sheet						

PDM: Rev:M



STATUS: Released

Printed: Jun 22, 2007




All rights strictly reserved. Reproduction or issue in any form without written authority from the proprietor.  
Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire.  
© FCI S.A.


PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
70227-X03/X03LF	1.6	2.90
70227-X13/X13LF	2.4	3.53

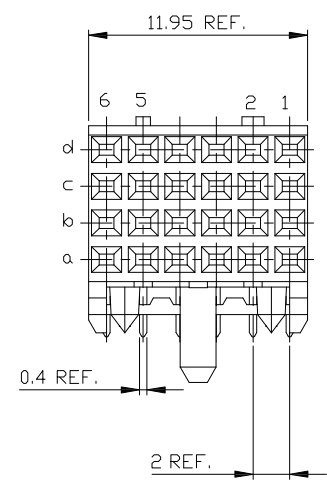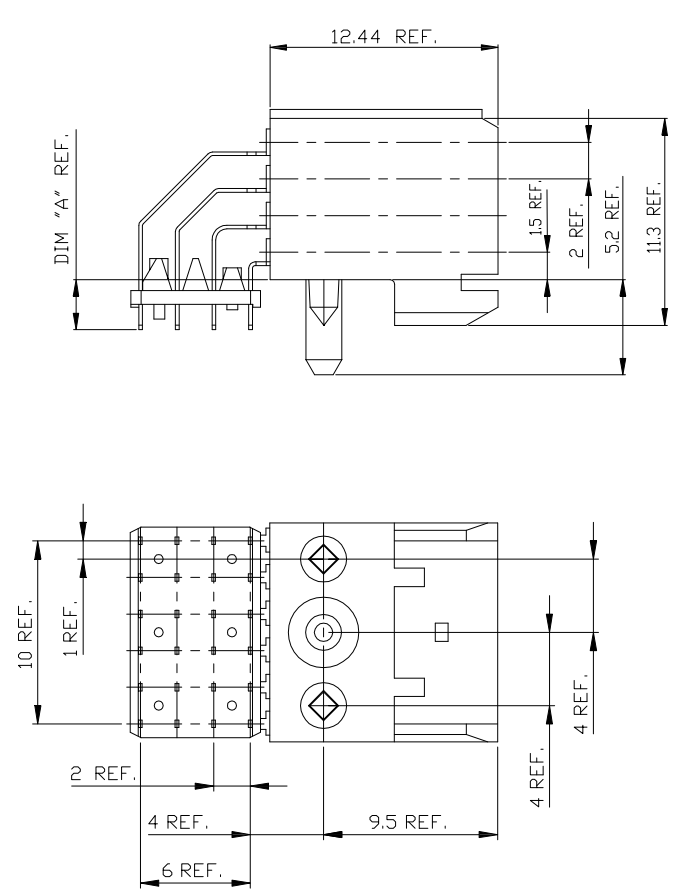

PRODUCT AFTER HOT RIVETTING.

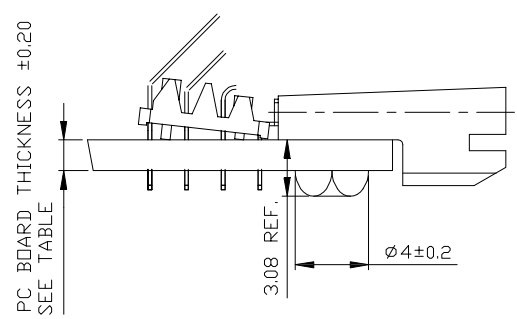

- NOTES:
- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS  
FLAME RETARDANT ACC. UL 94-V0
  - 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
  - 3 PLATING SOLDER TAILS 2-8  $\mu\text{m}$  SnPb 90-97 OR 2-8  $\mu\text{m}$  PURE Sn
  - 4 INDICATED HOLES ARE UNPLATED.
  - 5 PRODUCT MARKING: PART NUMBER & BATCH ID.
  - 6 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
  - 7 THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

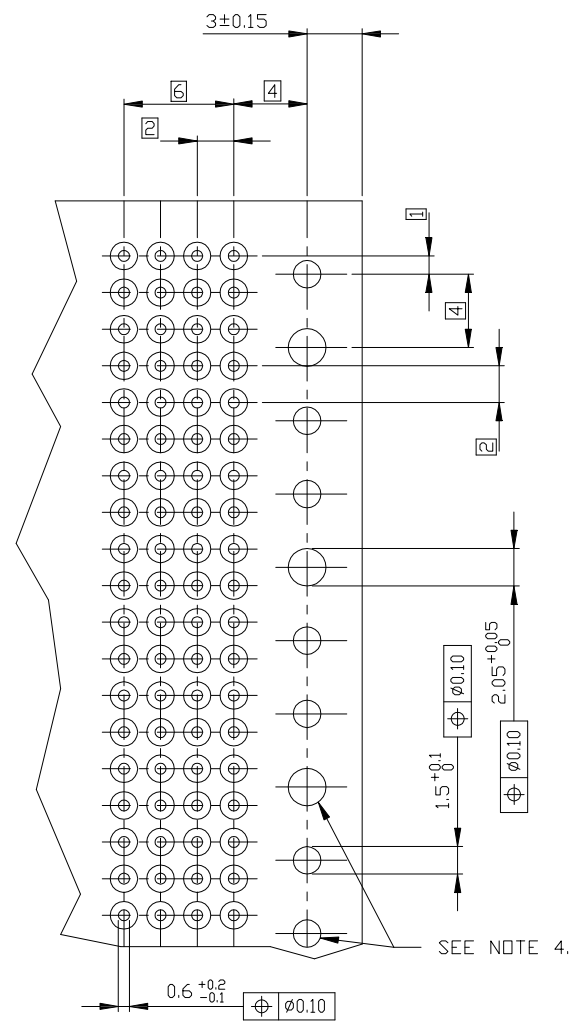

RECOMMENDED HOLE PATTERN,  
COMPONENT SIDE.

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL:
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL
-9YY/9YYLF	TELCORDIA CO

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI	
litr	ecn	nodr	date	linear	projection	title	www.fciconnection
M						RA FEMALE SIGNAL	
				angles		STB 12 mm VERSION	
				dir	Heaven Cen	11/17/06	
				engr	Collins Lu	11/17/06	
				chr	Beer Fu	11/17/06	
				appd	Joseph Hsia	11/17/06	
sheet	revision			scale	5:1	product family	METRAL(tm)
index	sheet					sizedwg no	code
						A2	213
						70227	sheet
							3 of
							8