


CABLE ASSEMBLIES

MINI-CLIPS/BNC MALE

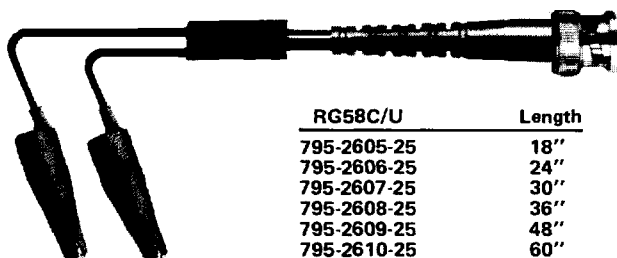


RG58C/U	Length
795-2605-25	18"
795-2606-25	24"
795-2607-25	30"
795-2608-25	36"
795-2609-25	48"
795-2610-25	60"

1st END — (2) Plated steel alligator clips with vinyl insulation, one red and one black.

CABLE — RG58C/U. Molded Y-insulation.

2nd END — Crimp BNC male. Plated brass body. Gold plated brass center contact. Black insulated flexible boot. 50 OHM impedance.

ALLIGATOR CLIPS/BNC MALE

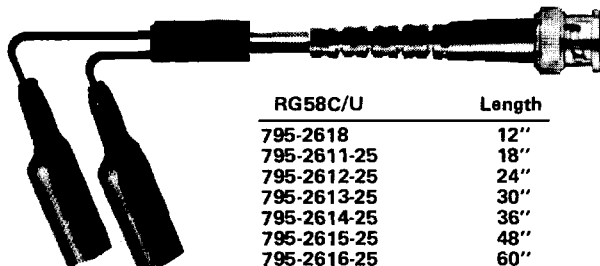


RG58C/U	Length
795-2618	12"
795-2611-25	18"
795-2612-25	24"
795-2613-25	30"
795-2614-25	36"
795-2615-25	48"
795-2616-25	60"

1st END — (2) plated steel alligator clips. Vinyl insulators, one red and one black.

CABLE — RG58C/U. Molded Y-insulation.

2nd END — Crimp BNC male. Plated brass body. Gold plated brass center contact. Black insulated flexible boot. 50 OHM impedance.

ALLIGATOR CLIPS/UHF MALE

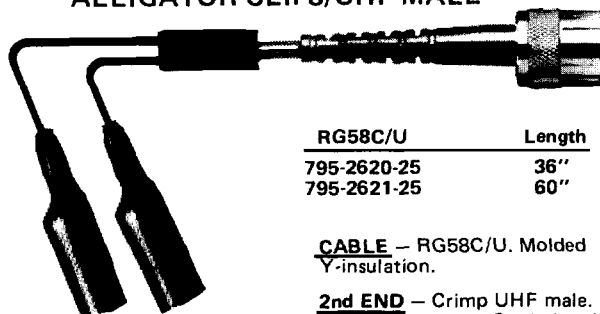


RG58C/U	Length
795-2620-25	36"
795-2621-25	60"

1st END — (2) Plated steel alligator clips. Vinyl insulators, one red and one black.

CABLE — RG58C/U. Molded Y-insulation.

2nd END — Crimp UHF male. Plated brass body. Gold plated brass center contact. Black insulated flexible boot. 50 OHM impedance.

ALLIGATOR CLIPS/BNC MALE

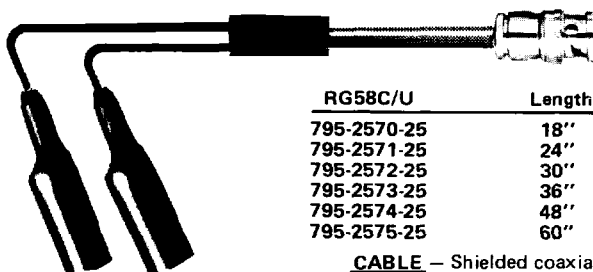


RG58C/U	Length
795-2570-25	18"
795-2571-25	24"
795-2572-25	30"
795-2573-25	36"
795-2574-25	48"
795-2575-25	60"

1st END — BNC male. Plated brass body. Gold plated brass center contact. 50 OHM impedance.

CABLE — Shielded coaxial, RG58C/U. Molded Y-insulation.

2nd END — Plated steel alligator clips. Vinyl insulators, one red and one black.

MINI-ALLIGATOR CLIPS TO BNC MALE

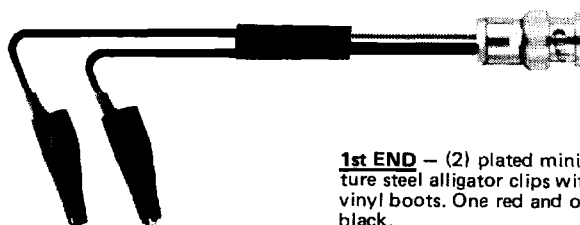

RG58C/U	Length
795-5320-25	18 Inches
795-5321-25	24 Inches
795-5322-25	30 Inches
795-5323-25	36 Inches
795-5324-25	48 Inches
795-5325-25	60 Inches

1st END — (2) plated miniature steel alligator clips with vinyl boots. One red and one black.

CABLE — Shielded coaxial, RG58C/U. molded Y-insulation.

2nd END — BNC male. Plated brass body. Gold plated brass center contact. 50 OHM impedance.

STACKING PIN TIPS TO BNC MALE




RG58C/U	Length
795-5355-25	18 Inches
795-5356-25	24 Inches
795-5357-25	36 Inches
795-5358-25	48 Inches
795-5359-25	60 Inches

1st END — (2) single stacking pin tip plugs. Gold plated brass pin body, gold plated beryllium copper socket. Polypropylene insulation. One red and one black.

CABLE — Shielded coaxial RG58C/U. Molded Y-insulation.

2nd END — BNC male. Plated brass body. Gold plated brass center contact pin. 50 OHM impedance.

DOUBLE BANANA PLUG/BNC MALE

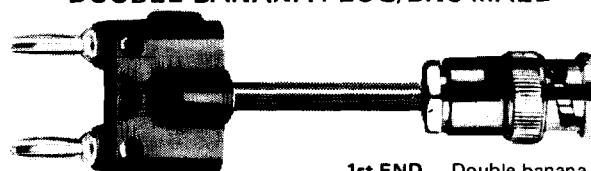


RG58C/U	Shielded Mic. Cable	Length
795-2580-25	795-3063-25	18"
795-2581-25	795-3064-25	24"
795-2582-25	795-3065-25	30"
795-2583-25	795-3066-25	36"
795-2584-25	795-3067-25	48"
795-2585-25	795-3068-25	60"

1st END — Double banana plug. Nickel plated brass plug body, nickel plated beryllium copper spring. Polyethylene insulation.

CABLE — Shielded mic. cable RG58C/U

2nd END — BNC male. Plated brass body, gold plated brass center contact. Impedance 50 OHMS.

DOUBLE BANANA PLUG

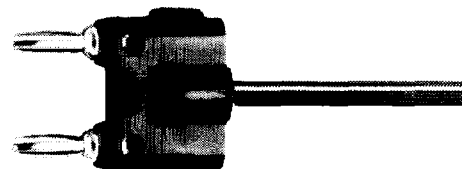

2 Cond. Twisted Pair	RG58C/U	Length
795-5117	795-5122	12"
795-5118	795-5123	24"
795-5119	795-5124	36"
795-5120	795-5125	48"
795-2590-25	795-2591-25	60"


1st END — Double banana plug. Nickel plated brass plug body. Nickel plated beryllium copper spring. Polyethylene insulation.

CABLE — Two conductor twisted pair, Rated at 300 VRMS or RG58C/U rated at 1400 VRMS.

SPECIFY —
CONCORD
"THE COMPONENT PEOPLE"

CABLE ASSEMBLIES

STACKING PIN TIPS TO DOUBLE BANANA PLUG

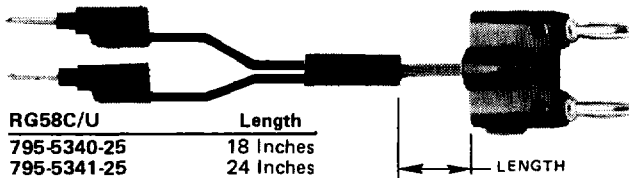

RG58C/U	Length
795-5340-25	18 Inches
795-5341-25	24 Inches
795-5342-25	36 Inches
795-5343-25	48 Inches
795-5344-25	60 Inches

1st END — (2) single stacking pin tip plugs. Plated brass pin, plated beryllium copper socket. Polyethylene insulation. One red and one black.

CABLE — RG58C/U, molded Y-insulation

2nd END — Double banana plug. Nickel plated brass bodies, nickel plated beryllium copper spring. Polypropylene insulation.

DOUBLE BANANA PLUG BOTH ENDS



2 Cond. Twisted Pair	RG58C/U	RG59B/U	Length
795-5106	795-5100		12"
795-5111	795-5105	795-5112	18"
795-5107	795-5101	795-5113	24"
795-5108	795-5102	795-5114	36"
795-5109	795-5103	795-5115	48"
795-5110	795-5104	795-5116	60"

1st END — Double banana plug. Nickel plated brass plug body, nickel plated beryllium copper spring. Polyethylene insulation.

CABLE — Two conductor twisted pair rated at 300 VRMS or RG58C/U rated at 1400 VRMS or RG59B/U rated at 1700 VRMS.

2nd END — Same as 1st end.

SINGLE PIN TIP PLUGS TO DOUBLE BANANA PLUG




	Length
795-5350-25	36"
795-5351-25	48"
795-5352-25	60"

1st END — (2) pin tip plugs. Nickel plated brass tips. Butyrate insulation, one red and one black

CABLE — Two conductor twisted pair. Molded Y-insulation.

2nd END — Double banana plug. Nickel plated brass body. Nickel plated beryllium copper spring. Polyethylene insulation

MINI ALLIGATOR CLIPS TO DOUBLE BANANA PLUGS

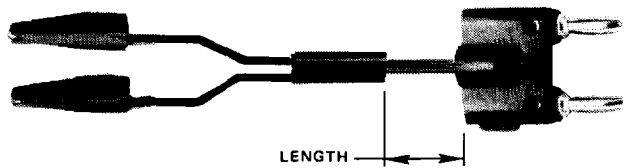


Two Cond. Twisted Pair	Shielded Coax. Cable	Length
795-5190-25	795-5196-25	18 Inches
795-5191-25	795-5197-25	24 Inches
795-5192-25	795-5198-25	30 Inches
795-5193-25	795-5199-25	36 Inches
795-5194-25	795-5206-25	48 Inches
795-5195-25	795-5207-25	60 Inches

1st END — (2) Plated miniature steel alligator clips with vinyl boots, one black and one red.

2nd END — Double banana plug. Nickel plated brass bodies, nickel plated beryllium copper spring. Polyethylene insulation.

CABLE — Two conductor, twisted pair (.250 O.D.) or RG58C/U. Molded Y-insulation.

DOUBLE BANANA PLUG TO ALLIGATOR CLIPS

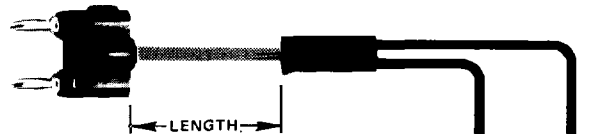


2 Cond. Twisted Pair	RG58C/U	Length
795-5128	795-5134	12"
795-5133	795-5185	18"
795-5129	795-5135	24"
795-5139	795-5186	30"
795-5130	795-5136	36"
795-5131	795-5137	48"
795-5132	795-5138	60"

1st END — Double ended banana plug. Nickel plated brass plug body. Nickel plated beryllium copper spring. Polyethylene insulation.

CABLE — Two conductor twisted pair rated at 300 VRMS or RG58C/U rated at 1400 VRMS. Molded Y-insulation.

2nd END — (2) nickel plated steel alligator clips with vinyl boots, one red and one black.

STACKING BANANA PLUG/ DOUBLE BANANA PLUG

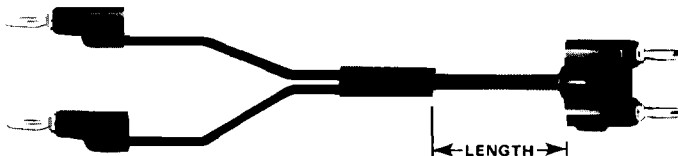

1st END — (2) single banana plugs. Nickel plated brass plug body. Nickel plated beryllium copper springs. Polypropylene insulation, one red and one black.


CABLE — Two conductor twisted pair. Molded Y-insulation.

2nd END — Double banana plug. Nickel plated brass plug body. Nickel plated beryllium copper spring. Polyethylene insulation.

2 Cond. Twisted Pair	Length
795-5310-25	18"
795-5311-25	24"
795-5312-25	30"
795-5313-25	36"
795-5314-25	48"
795-5315-25	60"

CONCORD®
MAINTAINS LARGE
INVENTORIES TO
SHIP SAME DAY ON
MOST PRODUCTS!

SAFETY HOOKS TO DOUBLE BANANA PLUG

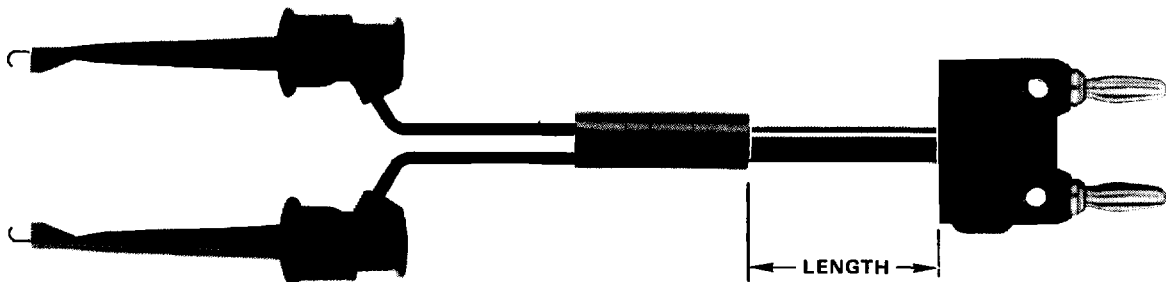


Part No.	Length
795-5075-25	18"
795-5076-25	24"
795-5077-25	36"
795-5078-25	48"
795-5079-25	60"

1st END – (2) Safety hooks. Gold plated beryllium copper contact. Lexan insulation, one red and one black.

CABLE – Shielded coaxial, RG58C/U. Molded Y-insulation.

2nd END – Double banana plug. Nickel plated brass body. Nickel plated beryllium copper spring. Polyethylene insulation.

SAFETY HOOKS TO BNC MALE

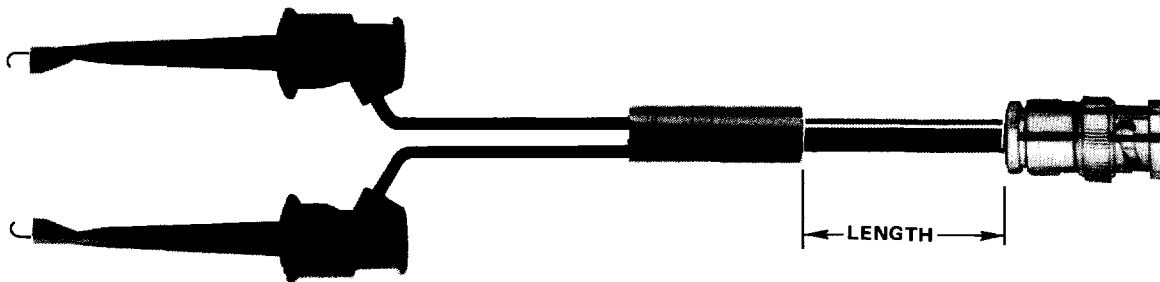

Part No.	Length
795-5070-25	18"
795-5071-25	24"
795-5072-25	36"
795-5073-25	48"
795-5074-25	60"


1st END – (2) Safety hooks. Gold plated beryllium copper contact. Lexan insulation, one red and one black.

CABLE – Shielded coaxial, RG58C/U. Molded Y-insulation

2nd END – BNC male. Plated brass body. Gold plated brass center contact.


CABLE ASSEMBLIES

SINGLE STACKING BANANA PLUGS EACH END

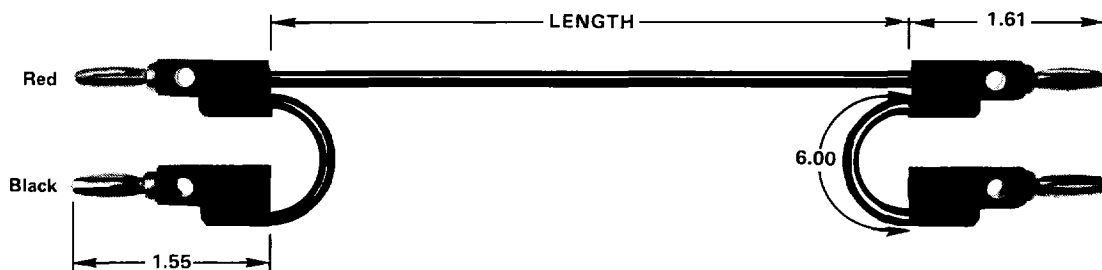


Part No.	Length	1st END — (2) single banana plugs. Nickel plated brass plug body. Nickel plated beryllium copper springs. Polypropylene insulation, one red and one black.	CABLE — RG58C/U (.195) O.D. RATING — 1400 VRMS	2nd END — (2) single banana plugs. Nickel plated brass plug body. Nickel plated beryllium copper springs. Polypropylene insulation, one red and one black
795-5376-25	24"			
795-5377-25	36"			
795-5378-25	48"			
795-5379-25	60"			

SINGLE STACKING BANANA PLUGS TO BNC MALE

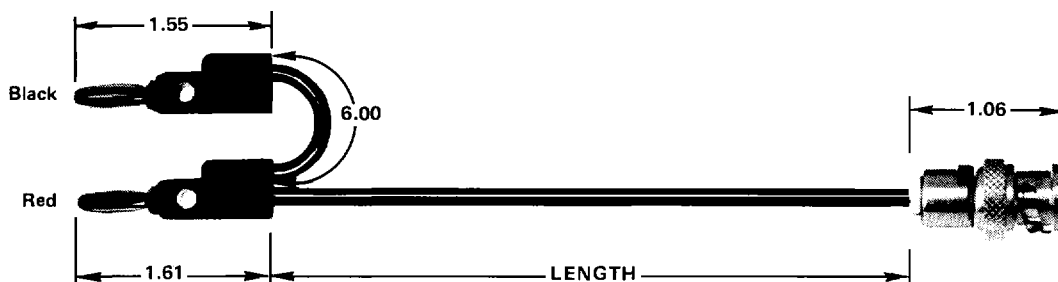

Part No.	Length	1st END — Double banana plugs. Nickel plated brass body. Nickel plated beryllium copper spring. Polypropylene insulation.	CABLE — Shielded coaxial, RG58C/U. Molded	2nd END — BNC male. Plated brass body. Gold plated brass center contact.
795-5410-25	18"			
795-5411-25	24"			
795-5412-25	36"			
795-5413-25	48"			

SAFETY HOOKS TO BNC MALE

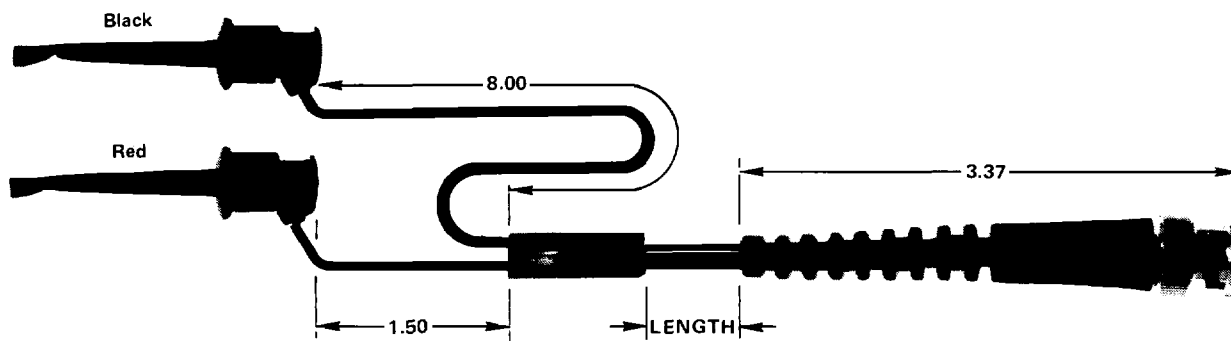

RG58C/U Part No.	Length	1st END — Safety hook Clip. Contact, beryllium copper, gold plated. Insulation, Polycarbonate. One black and one red.	CABLE — Shielded coaxial, RG58C/U. Molded Y-insulation	2nd END — BNC male. Plated brass body. Gold plated brass center contact.
795-5400-25	24"			
795-5401-25	36"			
795-5402-25	48"			
795-5403-25	60"			
RG174/U Part No.	Length		CABLE — Shielded coaxial RG 174/U. Y-Mold insulation; PVC, black	
795-5405-25	24"			
795-5406-25	36"			
795-5407-25	48"			
795-5408-25	60"			

CABLE ASSEMBLIES

BNC MALE/MALE



RG58C/U	RG59B/U	RG174/U	RG62A/U	Length
795-2500-25	795-2510-25	795-2516-25	795-2521-25	12"
795-2501-25	795-2511-25	795-2517-25	795-2522-25	24"
795-2502-25	795-2512-25	795-2518-25	795-2523-25	36"
795-2503-25	795-2513-25	795-2519-25	795-2524-25	48"
795-2504-25	795-2514-25	795-2520-25	795-2525-25	60"
795-2505-25	795-2515-25			72"
795-2506-25				120"
795-2507-25				180"

1st END — Crimp BNC male. Plated brass body. Gold plated brass center contact. Black PVC boot, 50 OHM impedance.

CABLE — RG58C/U (50 OHM), RG59 B/U (75 OHM), RG174/U (50 OHM), RG62A/U (93 OHM).

2nd END — Same as first.

BNC MALE/FEMALE



RG58C/U	RG59B/U	Length
795-2536-25	795-2556-25	12"
795-2537-25		24"
795-2538-25		36"
795-2539-25		48"
795-2540-25		60"

1st END — Crimp BNC male. Plated brass body. Gold plated brass center contact. Black insulated flexible boot. 50 OHMS impedance.

2nd END — Crimp BNC female. Plated brass body. Gold plated beryllium copper center contact. Black insulated flexible boot.

CABLE — RG58C/U.

BNC FEMALE/FEMALE



RG58C/U	Length
795-2541-25	12"
795-2542-25	24"
795-2543-25	36"
795-2544-25	48"
795-2545-25	60"

1st END — Crimp BNC female. Plated brass body. Gold plated beryllium copper center contact. Black insulated flexible boot.

CABLE — RG58C/U

2nd END — Same as 1st end.

BNC MALE, ONE END



RG58C/U	Length
795-2634-25	60"

1st END — Crimp BNC male. Plated brass body. Gold plated brass center contact. Black insulated flexible boot. 50 OHM impedance.

CABLE — RG58C/U, black

RIGHT ANGLE BNC MALE/MALE



RG58C/U	Length
795-2530-25	12"
795-2531-25	24"
795-2532-25	36"
795-2533-25	48"
795-2534-25	60"

1st END — Crimp BNC male, right angle. Plated brass body. Gold plated brass center contact. Black PVC boot. 50 OHM impedance.

CABLE — RG58C/U

2nd END — Same as 1st end.

UHF MALE/BNC MALE



RG58C/U	Length
795-2546-25	18"
795-2547-25	24"
795-2548-25	36"
795-2549-25	48"
795-2550-25	60"

1st END — Crimp UHF male. Plated brass body. Gold plated brass center contact. Black insulated flexible boot. Non-constant impedance.

2nd END — Crimp BNC male. Plated brass body. Gold plated brass center contact. Black insulated flexible boot. 50 OHM impedance.

CABLE — RG58C/U

UHF MALE/MALE



RG58C/U	Length
795-2551-25	18"
795-2552-25	24"
795-2553-25	36"
795-2554-25	48"
795-2555-25	60"

1st END — Crimp UHF male. Plated brass body. Gold plated brass center contact. Black insulated flexible boot. Non-constant impedance.

CABLE — RG58C/U

2nd END — Same as 1st end.

DOUBLE BANANA PLUG/BNC MALE



RG58C/U	Length
795-2600-25	18"
795-2601-25	24"
795-2602-25	36"
795-2603-25	48"
795-2604-25	60"

1st END — Double banana plug. Nickel plate brass body. Nickel plated beryllium copper spring. Black polyethylene insulation.

CABLE — RG58C/U

2nd END — Crimp BNC male. Plated brass body. Gold plated brass center contact. Black insulated flexible boot. 50 OHM impedance.

CABLE ASSEMBLIES

BNC MALE/MALE



Shielded Mic.	RG58C/U	RG59B/U	RG62A/U	Length
795-5220-25	795-2560-25	795-5200-25	795-5210-25	18"
795-5221-25	795-2561-25	795-5201-25	795-5211-25	24"
795-5222-25	795-2562-25	795-5202-25	795-5212-25	30"
795-5223-25	795-2563-25	795-5203-25	795-5213-25	36"
795-5224-25	795-2564-25	795-5204-25	795-5214-25	48"
795-5225-25	795-2565-25	795-5205-25	795-5215-25	60"

1st END — BNC male. Plated brass body. Gold plated brass center contact.

CABLE — Shielded Mic. 50 OHMS; RG58C/U, 50 OHMS; RG59B/U, 75 OHMS; RG62A/U, 93 OHMS.

2nd END — Same as 1st end.

TNC MALE/TNC MALE



RG58C/U	Length
795-5299-25	12"
795-5285-25	18"
795-5286-25	24"
795-5287-25	36"
795-5288-25	48"
795-5289-25	60"

1st END — TNC male. Plated brass body. Gold plated brass center contact. 50 OHM impedance.

CABLE — RG58C/U

2nd END — Same as 1st end.

BNC MALE/FEMALE



RG58C/U	Length
795-3031-25	12"
795-3032-25	24"
795-3033-25	36"
795-3034-25	48"
795-3035-25	60"

1st END — BNC male. Plated brass body. Gold plated brass center contact. 50 OHM impedance.

CABLE — RG58C/U.

2nd END — BNC female. Plated brass body. Gold plated beryllium copper center contact. 50 OHM impedance.

BNC MALE ONE END ONLY



RG58C/U	RG59B/U	Length
795-5230-25	795-5235-25	12"
795-5231-25	795-5236-25	24"
795-5232-25	795-5237-25	36"
795-5233-25	795-5238-25	48"
795-5234-25	795-5239-25	60"

1st END — BNC male. Plated brass body. Gold plated brass center contact. 50 OHM impedance.

CABLE — RG58C/U.

BNC FEMALE/FEMALE



RG58C/U	Length
795-3021-25	12"
795-3022-25	24"
795-3023-25	36"
795-3024-25	48"
795-3025-25	60"

1st END — BNC female. Plated brass body. Gold Plated beryllium copper contact. 50 OHM impedance.

CABLE — RG58C/U.

2nd END — Same as 1st end.

SMA MALE/BNC MALE



RG316/U	Length
795-5295-25	24"
795-5296-25	48"
795-5297-25	60"

1st END — Crimp SMA male. Passivated steel shell. Gold plated center contact.

2nd END — BNC male. Plated brass body. Gold plated brass center contact.

CABLE — RG316/U.

BNC MALE/TNC MALE




RG58C/U	Length
795-5245-25	12"
795-5246-25	24"
795-5247-25	36"
795-5248-25	48"
795-5249-25	60"

1st END — BNC male. Plated brass body. Gold plated brass center contact. 50 OHM impedance.

2nd END — TNC male. Plated brass body. Gold plated brass center contact. 50 OHM impedance.

CABLE — RG58C/U.

BNC MALE TO RIGHT ANGLE BNC MALE

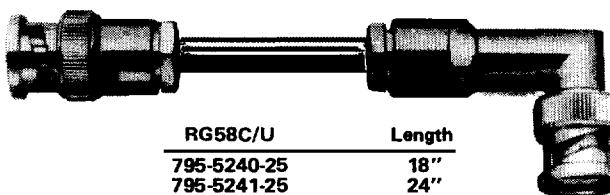

RG58C/U	Length
795-5240-25	18"
795-5241-25	24"
795-5242-25	36"
795-5243-25	48"
795-5244-25	60"


1st END — BNC male. Plated brass body. Gold plated brass center contact. 50 OHM impedance.

2nd END — Right angle BNC male. Plated brass body. Gold plated brass center contact. 50 OHM impedance.

CABLE — RG58C/U.

CABLE ASSEMBLIES

BNC MALE TO TYPE "N" MALE

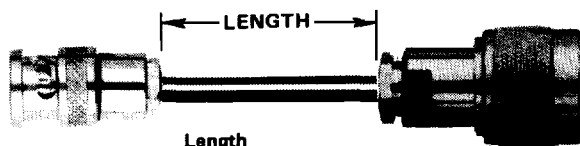


	Length
795-5250-25	24"
795-5251-25	36"
795-5252-25	48"

1st END — BNC male, plated brass body. Gold plated brass plated center contact.

CABLE — Shielded coaxial, RG58C/U.

2nd END — Type "N" male, plated brass body. Gold plated brass center contact.

TYPE "N" MALE EACH END

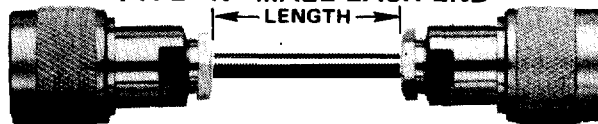


RG58C/U	RG142B/U	Length
795-5265-25	795-5270-25	24"
795-5266-25	795-5271-25	36"
795-5267-25	795-5272-25	48"
795-5268-25	795-5273-25	60"

1st END — Type "N" male, plated brass body. Gold plated brass center contact.

CABLE — Shielded coax, RG58C/U or RG142B/U.
2nd END — Same as 1st end.

TYPE "N" MALE EACH END

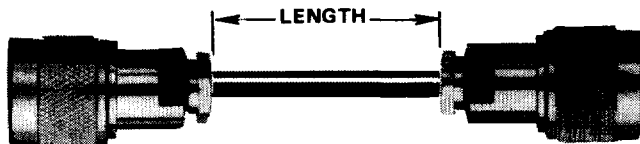


RG213/U	RG214/U	Length
795-5255-25	795-5260-25	18"
795-5256-25	795-5261-25	24"
795-5257-25	795-5262-25	36"
795-5258-25	795-5263-25	48"
795-5259-25	795-5264-25	60"

1st END — Type "N" male, plated brass body. Gold plated brass center contact.

CABLE — Shielded coax, RG213/U or RG214/U

2nd END — Same as 1st end.

TYPE "N" MALE TO "N" FEMALE

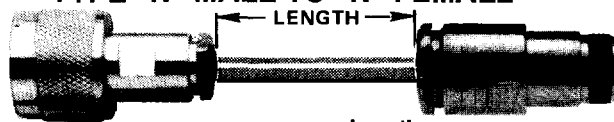

	Length
795-5280-25	18"
795-5281-25	24"
795-5282-25	36"
795-5283-25	48"
795-5284-25	60"

1st END — Type "N" male, plated brass body. Gold plated brass center contact.

Cable — RG214/U
2nd END — BNC female. Plated brass body. Gold plated beryllium copper center contact.

MICROWAVE CABLE ASSEMBLIES

SPECIFICATIONS

Connectors: Gold Plated Center Conductor. Stainless Steel Shells
Cable: RG174/U Coaxial Cable — 50 Ohm .100 O.D. .45 dB/FT. @ 1.0 GHz Max. Loss Temperature 85°C (185°F) Max.

RG316/U Coaxial Cable — 50 Ohm .098 O.D. .56 dB/FT. @ 3 GHz Max. Temperature 200°C (392°F) Max.

RG142B/U Coaxial Cable — 50 Ohm .195 O.D. 67 dB/FT. @ 12.4 GHz Temperature 200°C (392°F) Max.

SMA MALE BOTH ENDS



RG174/U	RG316/U	RG142B/U	LENGTH
795-5140-25	795-5143-25	795-5146-25	24"
795-5141-25	795-5144-25	795-5147-25	48"
795-5142-25	795-5145-25	795-5148-25	60"

SMA MALE TO SMA FEMALE




RG174/U	RG316/U	RG142B/U	LENGTH
795-5160-25	795-5163-25	795-5166-25	24"
795-5161-25	795-5164-25	795-5167-25	48"
795-5162-25	795-5165-25	795-5168-25	60"

RIGHT ANGLE SMA MALE BOTH ENDS



RG174/U	RG316/U	RG142B/U	LENGTH
795-5150-25	795-5153-25	795-5156-25	24"
795-5151-25	795-5154-25	795-5157-25	48"
795-5152-25	795-5155-25	795-5158-25	60"

SMA MALE TO RIGHT ANGLE SMA MALE

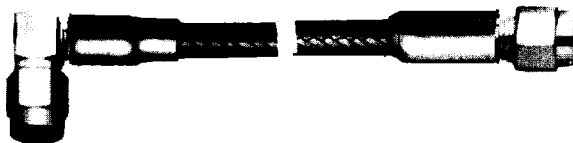

RG174/U	RG316/U	RG142B/U	LENGTH
795-5170-25	795-5173-25	795-5176-25	24"
795-5171-25	795-5174-25	795-5177-25	48"
795-5172-25	795-5175-25	795-5178-25	60"

SMA MALE TO TYPE "N" MALE




RG142B/U	LENGTH
795-5180-25	12"
795-5181-25	24"
795-5182-25	36"
795-5183-25	48"
795-5184-25	60"

MULTIMETER TEST LEADS

MULTIMETER TEST LEAD

795-2690-XX-25
795-2691-XX-25
795-2692-XX-25
795-2693-XX-25

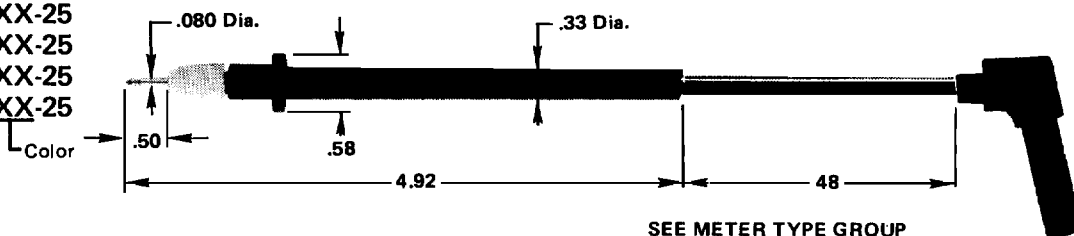


SEE METER TYPE GROUP
AT BOTTOM OF PAGE

1st END — Nylon insulated miniature test probe. Nickel plated brass tip.

WIRE — #18 AWG, tinned, PVC insulated.

PART NO.	COLOR	TYPE	2ND END DESCRIPTION
795-2691-10-25	BLACK	I	SHEATHED BANANA JACK. NICKEL PLATED BRASS.
795-2691-12-25	RED		
795-2692-10-25	BLACK	II	SHEATHED BANANA PLUG. NICKEL PLATED BRASS BODY. NICKEL PLATED BERYLLIUM COPPER SPRING.
795-2692-12-25	RED		
795-2690-10-25	BLACK	III	SHEATHED BANANA PLUG. NICKEL PLATED BRASS BODY. NICKEL PLATED BERYLLIUM COPPER SPRING.
795-2690-12-25	RED	IV	
795-2693-10-25	BLACK	IV	SHEATHED BANANA PLUG. NICKEL PLATED BRASS BODY. NICKEL PLATED BERYLLIUM COPPER SPRING.
795-2693-12-25	RED		

MULTIMETER TEST LEAD, EXTENDABLE TIP PROBE

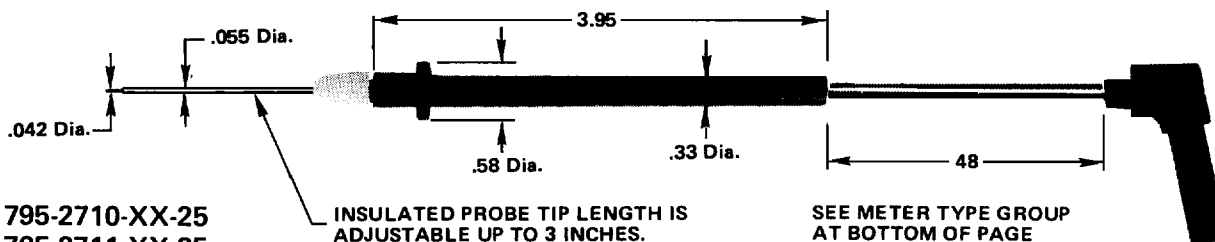

SEE METER TYPE GROUP
AT BOTTOM OF PAGE

795-2710-XX-25
795-2711-XX-25
795-2712-XX-25
795-2713-XX-25

Color

1st END — Nylon insulated miniature test probe with extendable tip. Tip is Kynar insulated stainless steel.

WIRE — #18 AWG, tinned, PVC insulated.


PART NO.	COLOR	TYPE	2ND END DESCRIPTION
795-2711-10-25	BLACK	I	POLYPROPYLENE SHEATHED BANANA JACK. NICKEL PLATED BRASS.
795-2711-12-25	RED		
795-2712-10-25	BLACK	II	POLYPROPYLENE SHEATHED BANANA PLUG. NICKEL PLATED BRASS BODY. NICKEL PLATED BERYLLIUM COPPER SPRING.
795-2712-12-25	RED		
795-2710-10-25	BLACK	III	POLYPROPYLENE SHEATHED BANANA PLUG. NICKEL PLATED BRASS BODY. NICKEL PLATED BERYLLIUM COPPER SPRING.
795-2710-12-25	RED	IV	
795-2713-10-25	BLACK	IV	POLYPROPYLENE SHEATHED BANANA PLUG. NICKEL PLATED BRASS BODY. NICKEL PLATED BERYLLIUM COPPER SPRING.
795-2713-12-25	RED		

TYPE	INSTRUMENTS GROUPED BY COMPATIBLE TEST LEAD TYPE
I	Simpson Model Nos.: 260 series, 7, 270-5, 360-3, 460-5, 461, 461-2, 461-2R, 462, 463, 464-3, 467, 467E, 467dB, 470 and 474.
II	Triplett Model Nos.: 60 Type 2, 60-A, 60AC, 60NA Type 2, 64, 630 Type 4 and 630A Type 4.
III	Beckman Model Nos.: 3000, 3010, 3010UL, 3020, 3020B, 3030, Tech 300, Tech 310, Tech 310UL, Tech 320B, Tech 330 (shipped before August 1, 1983; Serial Numbers: 0XXXXXXX, 1XXXXXXX, 2XXXXXXX, 8XXXXXXX, 9XXXXXXX and 301XXXXX thru 307XXXXX). Most Amprobe Models
IV	Beckman Model Nos.: 3000, 3010, 3020, 3020B, 3030, Tech 300, Tech 310, Tech 320B, Tech 330 (shipped after August 1, 1983; Serial Numbers 308XXXXX thru 312XXXXX, 4XXXXXXX and 5XXXXXXX) 310B, 310T, 320, 350, 360, 4410, HD10, HD110, HD110T, HD130, HD140, DM40, DM45 and DM50. Fluke Model Nos.: 8025A, 25, 27, 73, 75, 77, 8020B, 8021B, 8022B, 8024B, 8026B, 8050A, 8060A, 8062A and 8840A. Most B&K Models

MULTIMETER TEST LEADS

MULTIMETER TEST LEAD KIT

795-2740-25
795-2741-25
795-2742-25
795-2743-25

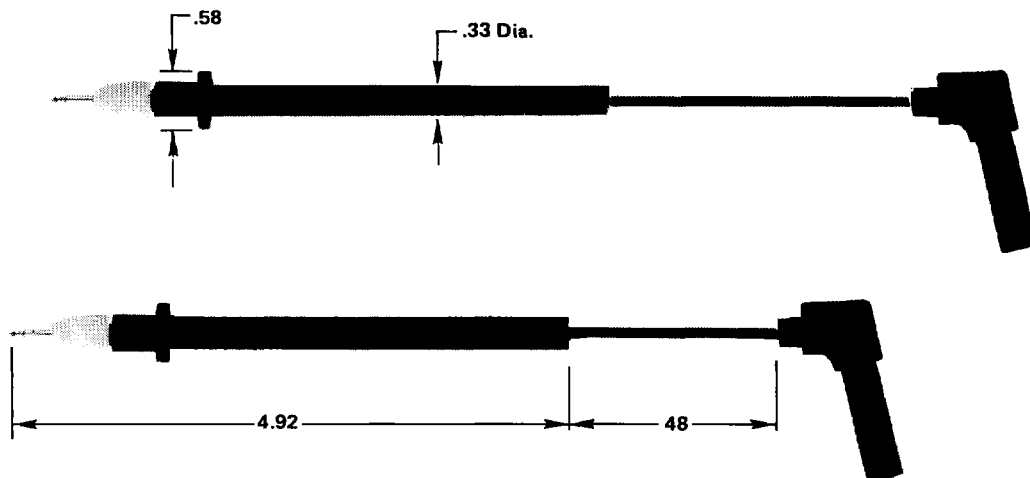

EACH KIT CONSISTS OF A PAIR OF TEST LEADS, ONE BLACK AND ONE RED.

SEE BOTTOM OF PAGE 26.01
FOR METER TYPE GROUP

1st END — Nylon insulated miniature test probe. Nickel plated brass tip.


WIRE — #18 AWG, tinned, PVC insulated.

PART NO.	TYPE	DESCRIPTION
795-2740-25	I	POLYPROPYLENE SHEATHED BANANA JACK. NICKEL PLATED BRASS.
795-2741-25	II	
795-2742-25	III	POLYPROPYLENE SHEATHED BANANA PLUG. NICKEL PLATED BRASS BODY. NICKEL PLATED BERYLLIUM COPPER SPRING.
795-2743-25	IV	

MULTIMETER TEST LEAD WITH SAFETY-HOOK

795-2730-XX-25
795-2731-XX-25
795-2732-XX-25
795-2733-XX-25

Color

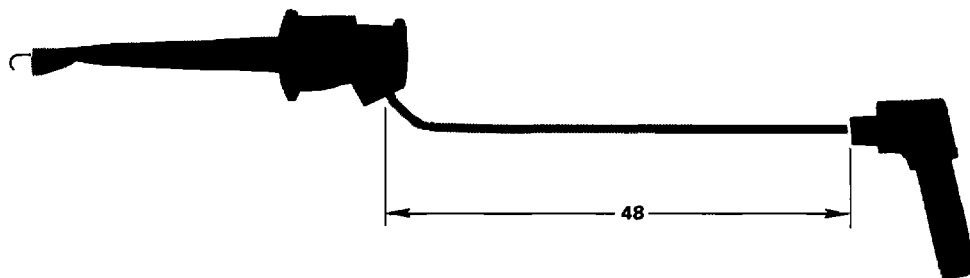

SEE BOTTOM OF PAGE 26.01
FOR METER TYPE GROUP

1st END — Safety hook. Gold plated beryllium copper contact. Lexan insulation.

WIRE — #18 AWG, tinned, PVC insulation.

PART NO.	COLOR	TYPE	2nd END DESCRIPTION
795-2730-10-25	BLACK	I	POLYPROPYLENE SHEATHED BANANA JACK. NICKEL PLATED BRASS.
795-2730-12-25	RED		
795-2731-10-25	BLACK	II	POLYPROPYLENE SHEATHED BANANA JACK. NICKEL PLATED BRASS.
795-2731-12-25	RED		
795-2732-10-25	BLACK	III	POLYPROPYLENE SHEATHED BANANA PLUG. NICKEL PLATED BRASS BODY. NICKEL PLATED BERYLLIUM COPPER SPRING.
795-2732-12-25	RED		
795-2733-10-25	BLACK	IV	POLYPROPYLENE SHEATHED BANANA PLUG. NICKEL PLATED BRASS BODY. NICKEL PLATED BERYLLIUM COPPER SPRING.
795-2733-12-25	RED		