

Banana Plugs



APPLICATION ● Test Equipment ● Power Supplies


Uninsulated Rivet Type

SPECIFICATIONS

Plug Body: Brass per QQ-B-626D
Plug Spring: Beryllium copper per QQ-C-533
Finish: Silver
Panel Thickness: Up to .156" (4mm)

RATINGS

Current: 15 amps
Contact Resistance: 0.010 ohms maximum

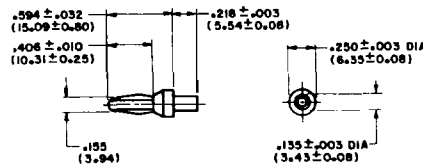

For Standard Banana Jack: .166" (4.23mm) Diameter

FEATURES:

- Shorter spring adapts to standard jack or special size jack
- Ideal for limited space applications

SILVER PLATING

PART NO.

108-0754-001


Uninsulated Panel Mount Threaded Stud

SPECIFICATIONS

Plug Body: Brass per QQ-B-626D
Plug Spring: Nickel silver per QQ-C-585
Finish: Nickel
Panel Thickness: Up to .25" (6.35mm) .625" (16mm)
Hardware: Nickel plated nut, stamped tin plated solder terminal (unassembled)

RATINGS

Current: 15 amps
Contact Resistance: 0.010 ohms maximum

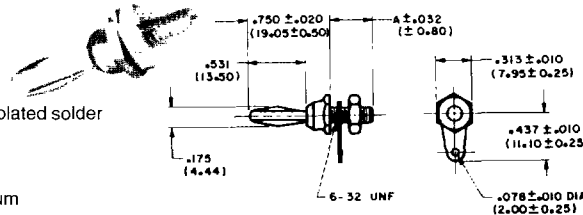

For Standard Banana Jack: .166" (4.23mm) Diameter

FEATURES:

- Two stud lengths adapt to different panel sizes
- Pierced hole for up to 14 gauge wire

NICKEL PLATING

PART NO.

STUD LENGTH "A"

108-0750-001 .375" (9.50mm)

108-0750-002 .750" (19.05mm)

Uninsulated Panel Mount Screw Type, Nickel Silver Spring


SPECIFICATIONS

Plug Body: Brass per QQ-B-626D
Plug Spring: Nickel silver per QQ-C-585
Finish: Silver
Panel Thickness: Up to .125" (3.2mm)

Hardware: Nickel plated screw, stamped tin plated solder terminal (unassembled)

RATINGS

Current: 15 amps
Contact Resistance: 0.010 ohms maximum

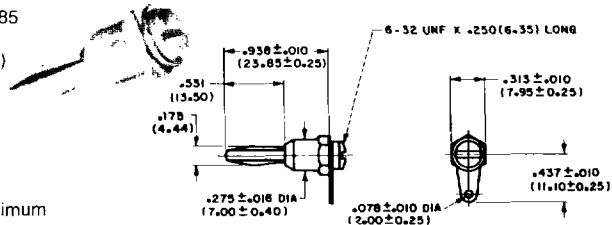

For Standard Banana Jack: .166" (4.23mm) Diameter

FEATURES:

- Rugged screw type
- Stamped tin plated solder terminal with hole for up to 14 gauge wire

NICKEL PLATING

PART NO.

108-0753-001


Uninsulated Panel Mount Screw Type, Beryllium Copper Spring

SPECIFICATIONS

Plug Body: Brass per QQ-B-626D
Plug Spring: Beryllium copper per QQ-C-533
Finish: Nickel
Panel Thickness: Up to .156" (4mm)
Hardware: Nickel plated nut, stamped tin plated solder terminal (unassembled)

RATINGS

Current: 15 amps
Contact Resistance: 0.010 ohms maximum

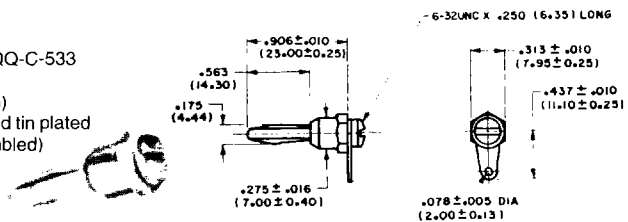

For Standard Banana Jack: .166" (4.23mm) Diameter

FEATURES:

- Rugged screw type
- Stamped tin plated solder terminal with hole for up to 14 gauge wire

NICKEL PLATING

PART NO.

108-0753-102

Insulated Solderless Tapered Handle


SPECIFICATIONS

Plug Body: Brass per QQ-B-626D
Plug Spring: Nickel silver per QQ-C-533
Finish: Nickel

Insulated Handle: Nylon 6/6 per ASTM D4066

RATINGS

Current: 15 amps
Breakdown Voltage: 3500 Vrms minimum ^
Contact Resistance: 0.010 ohms maximum

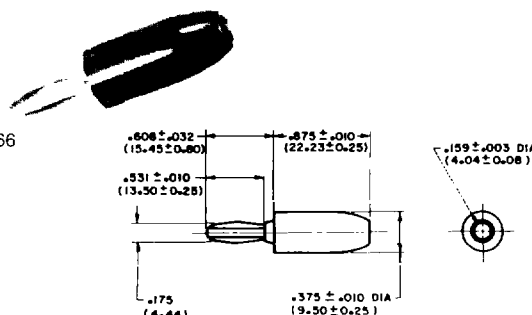

For Standard Banana Jack: .166" (4.23mm) Diameter

FEATURES:

- Fast solderless connection of up to 16 gauge wire
- Recessed plug body to limit shock hazard
- Nylon UL approved for self extinguishing

NICKEL PLATING

PART NO.	COLOR	PART NO.	COLOR
108-0301-001	White	108-0307-001	Yellow
108-0302-001	Red	108-0308-001	Brown
108-0303-001	Black	108-0310-001	Blue
108-0304-001	Green	108-0312-001	Violet
108-0306-001	Orange	108-0313-001	Gray

E.F. JOHNSON COMPANY • Component Division • 1-800-247-8256, ext. 6281

299 Johnson Avenue, P.O. Box 1249, Waseca, MN 56093-0514 Phone: (507) 835-6281 Fax: (507) 835-6287, or 1-800-247-8256, ext. 6287

* Avoid user injury due to misapplication. See safety advisory and definitions on page 1


Insulated Hex Body Solder Type Long Handle

SPECIFICATIONS

Plug Body: Brass per QQ-B-626D
Plug Spring: Nickel silver per QQ-C-585
Finish: Nickel
Insulated Handle: Nylon 6/6 per ASTM D4066

RATINGS

Current: 15 amps
Breakdown Voltage: 3500 Vrms minimum ^
Contact Resistance: 0.010 ohms maximum

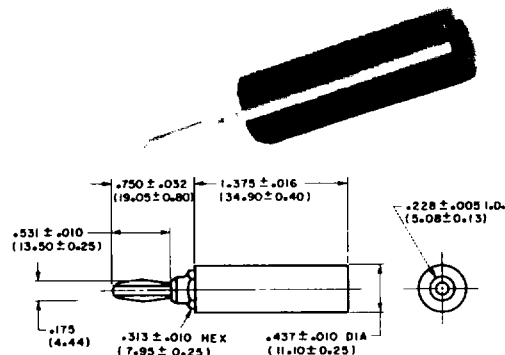

For Standard Banana Jack: .166" (4.23mm)

Diameter

FEATURES:

- Solder type terminal uses up to 16 gauge wire
- Nylon UL approved for self extinguishing

NICKEL PLATING

PART NO.	COLOR
108-0752-001	Black
108-0752-002	Red


Insulated Side Set Screw Solderless

SPECIFICATIONS

Plug Body: Brass per QQ-B-626D
Plug Spring: Nickel silver per QQ-C-585
Finish: Nickel
Insulated Handle: Nylon 6/6 per ASTM D4066

RATINGS

Current: 15 amps
Breakdown Voltage: 35 Vrms minimum ^
Contact Resistance: 0.010 ohms maximum

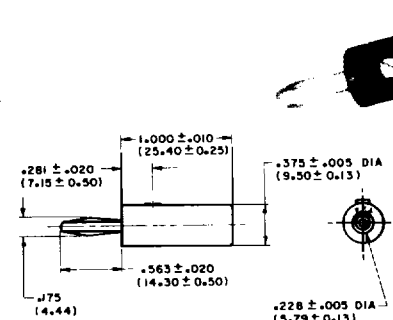

For Standard Banana Jack: .166" (4.23mm)

Diameter

For Low Voltage (50 WVDC) Applications

FEATURES:

- Fast solderless connection of up to 16 gauge wire
- Set screw for dependable connections with low voltage
- Nylon UL approved for self extinguishing

NICKEL PLATING

PART NO.	COLOR	PART NO.	COLOR
108-1701-101	White	108-1704-101	Green
108-1702-101	Red	108-1707-101	Yellow
108-1703-101	Black	108-1710-101	Blue


Insulated Hex Body Solder Stud

SPECIFICATIONS

Plug Body: Brass per QQ-B-626D
Plug Spring: Nickel silver per QQ-C-585
Finish: Nickel
Insulated Handle: Nylon 6/6 per ASTM D4066

RATINGS

Current: 15 amps
Breakdown Voltage: 3500 Vrms minimum ^
Contact Resistance: 0.010 ohms maximum

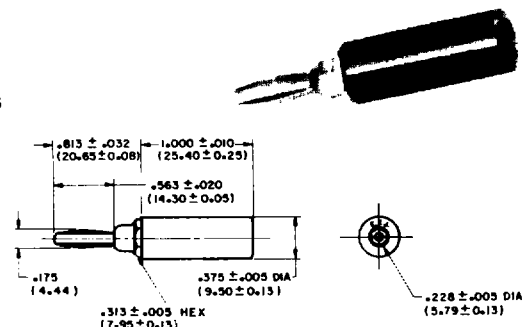

For Standard Banana Jack: .166" (4.23mm)

Diameter

FEATURES:

- Wire can be soldered to threaded stud or flared and held by stud for solderless connection
- Solder stud accepts up to 16 gauge wire
- Nylon UL approved for self extinguishing

NICKEL PLATING

PART NO.	COLOR	PART NO.	COLOR
108-1761-101	White	108-1764-101	Green
108-1762-101	Red	108-1767-101	Yellow
108-1763-101	Black	108-1770-101	Blue


Insulated Round Body Solder Stud

SPECIFICATIONS

Plug Body: Brass per QQ-B-626D
Plug Spring: Nickel silver per QQ-C-585
Finish: Nickel
Insulated Handle: Nylon 6/6 per ASTM D4066

RATINGS

Current: 15 amps
Breakdown Voltage: 3500 Vrms minimum ^
Contact Resistance: 0.010 ohms maximum

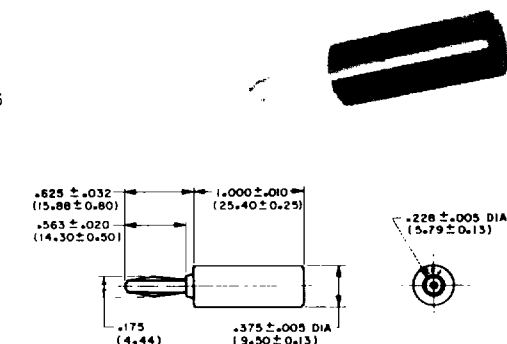

For Standard Banana Jack: .166" (4.23mm)

Diameter

FEATURES:

- Wire can be soldered to threaded stud or flared and held by stud for solderless connection
- Solder stud accepts up to 16 gauge wire
- Nylon UL approved for self extinguishing

NICKEL PLATING

PART NO.	COLOR	PART NO.	COLOR
108-1721-101	White	108-1724-101	Green
108-1722-101	Red	108-1727-101	Yellow
108-1723-101	Black	108-1730-101	Blue

Banana Plugs



APPLICATION ● Test Equipment ● Power Supplies

Insulated Round Body Solderless

SPECIFICATIONS

Plug Body: Brass per QQ-B-626D

Plug Spring: Nickel silver per QQ-C-585

Finish: Nickel


Insulated Handle: Nylon 6/6 per ASTM D4066

RATINGS

Current: 15 amps

Breakdown Voltage: 3500 Vrms minimum ^

Contact Resistance: 0.010 ohms maximum

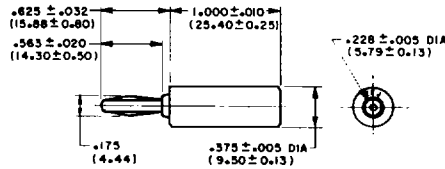

For Standard Banana Jack: .166" (4.23mm)

Diameter

FEATURES:

- Wire locked in place by screwing down handle
- Accepts up to 16 gauge wire
- Nylon UL approved for self extinguishing

NICKEL PLATING

PART NO.	COLOR	PART NO.	COLOR
108-1721-103	White	108-1724-103	Green
108-1722-103	Red	108-1727-103	Yellow
108-1723-103	Black	108-1730-103	Blue

Insulated Stacking Single Type

SPECIFICATIONS

Plug Body: Brass per QQ-B-626D

Plug Spring: Silver per QQ-C-585

Finish: Nickel


Insulated Handle: Nylon 6/6 per ASTM D4066

RATINGS

Current: 15 amps

Breakdown Voltage: 3500 Vrms minimum ^

Contact Resistance: 0.010 ohms maximum

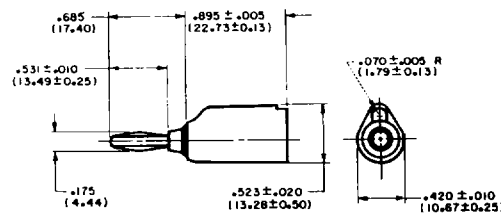

For Standard Banana Jack: .166" (4.23mm)

Diameter

FEATURES:

- Built in strain relief for long life
- Solder stud accepts up to 16 gauge wire
- Accepts standard banana plug from rear
- Nylon UL approved for self extinguishing

NICKEL PLATING

PART NO.	COLOR	PART NO.	COLOR
108-1081-001	White	108-1084-001	Green
108-1082-001	Red	108-1087-001	Yellow
108-1083-001	Black	108-1090-001	Blue

For assembly tools see page 12.

Insulated Stacking Dual Type

SPECIFICATIONS

Plug Body: Brass per QQ-B-626D

Plug Spring: Nickel silver per QQ-C-586

Finish: Nickel



Insulated Handle: Nylon 6/6 per ASTM D4066

RATINGS

Current: 15 amps

Breakdown Voltage: 3500 Vrms minimum ^

Contact Resistance: 0.010 ohms maximum

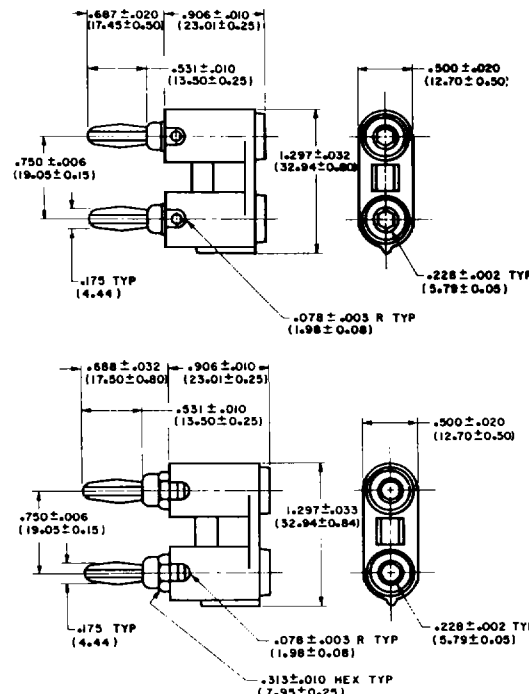

For Standard Banana Jack: .166" (4.23mm)

Diameter

FEATURES:

- Accepts standard banana plug from rear
- Built-in strain relief for long life
- Nylon UL approved for self extinguishing

NICKEL PLATING

SET SCREW (Accepts wire sizes up to 14 gauge)	
PART NO.	COLOR
108-0252-001	Red
108-0253-001	Black
SOLDERLESS WIRE WRAP (Accepts wire sizes up to 16 gauge)	
PART NO.	COLOR
108-0202-001	Red
108-0203-001	Black

E.F. JOHNSON COMPANY • Component Division • 1-800-247-8256, ext. 6281

299 Johnson Avenue, P.O. Box 1249, Waseca, MN 56093-0514 Phone: (507) 835-6281 Fax: (507) 835-6287, or 1-800-247-8256, ext. 6287

* Avoid user injury due to misapplication. See safety advisory and definitions on page 1