


MODEL 726 250 kHz – 24 MHz TTL Oscillator

14 Pin DIP Package
External Input allows output to be gated "On" or "Off."
Generic Equivalent of MIL-PRF-55310/17

Frequency Range	Input Current @ 5.25 V mA	Rise & Fall Time (.8 & 2.0 V) ns	Duty Cycle @ 1.4 V	Unit Loads (max.)
250.0 kHz to 12.0 MHz	40	15	45 to 55	10 TTL
>12.0 MHz to 24.0 MHz	40	15	40 to 60	10 TTL

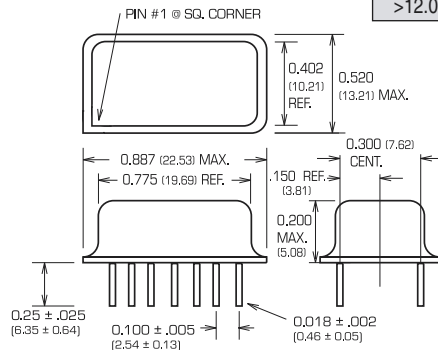


PIN CONNECTIONS

7 – GND
8 – Output
9 – Enable
14 – VCC
All Others N/C

MODEL 741 1 Hz – 80 MHz TTL Oscillator

14-Pin DIP
Most Popular Pin-out
Generic Equivalent of MIL-PRF-55310/16

Frequency Range	Input Current @ 5.25 V mA	Rise & Fall Time (.8 & 2.0 V) ns	Duty Cycle @ 1.4 V	Unit Loads (max.)
1.0 Hz to 12.0 MHz	30	15	45 to 55	10 TTL
>12.0 MHz to 24.0 MHz	30	5	40 to 60	10 TTL
>24.0 MHz to 80.0 MHz	40	5	40 to 60	6 TTL

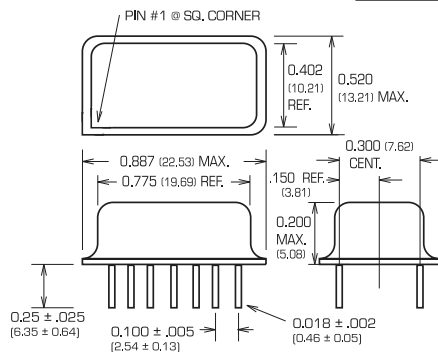

PIN CONNECTIONS

7 – GND/Case
8 – Output
14 – VCC
All Others N/C