

4-Leiter-Filter


4-Line Filters

Anlagen und Systeme B84131

- Für 3-Phasen-Systeme
- Metallgehäuse
- Flachstecker / Schraubanschlüsse

Bemessungsspannung U_R : 440/250 V~,
50/60 Hz

Klimakategorie: 25/085/21

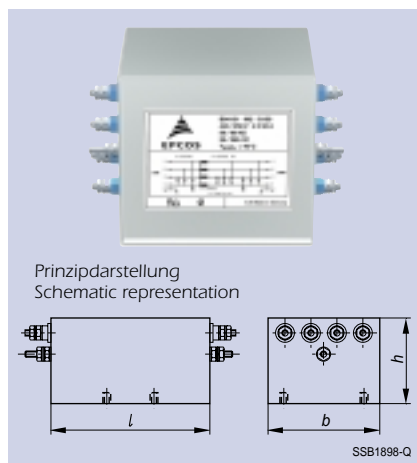

Installations and systems B84131

- For 3-phase systems
- Metal case
- Tab connectors / screw terminals

Rated voltage V_R : 440/250 V~,
50/60 Hz

Climatic category: 25/085/21


I_R A	I_{Abl} I_{leak} mA	Maße Dimensions l x b x h (mm)	Anschlüsse Terminals	Bestellnummer Ordering code	Approbationen Approvals
6	< 3,5	135 x 62 x 46	Flachstecker / Tab connector	B84131-A6-A1	
16	< 3,5	149 x 104 x 50		B84131-M3-A116	x x x
25	< 3,5	149 x 104 x 80	Gewinde / Thread M6	B84131-M1-G125	in Vorb./pending
35	< 3,5	149 x 104 x 80		B84131-M1-G135	x x x
35	< 3,5	149 x 104 x 80	Gewinde / Thread 10-32 UNF	B84131-M1-H135	x x x
50	< 3,5	141 x 131 x 122	Gewinde / Thread M6	B84131-M2-G150	x x
63	< 3,5	141 x 131 x 122		B84131-M2-G163	x x
80	< 3,5	220 x 150 x 150	Gewinde / Thread M10	B84131-M4-G180	
125	< 3,5	220 x 150 x 150		B84131-M4-G225	

Anlagen und Systeme B84108

- Für 3-Phasen-Systeme
- Metallgehäuse
- Flachstecker

Bemessungsspannung U_R : 440/250 V~,
50/60 Hz

Klimakategorie: 25/085/21

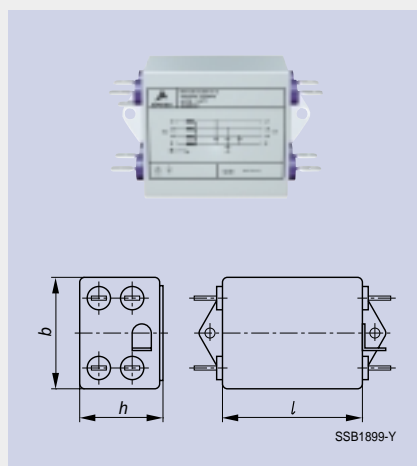

Installations and systems B84108

- For 3-phase systems
- Metal case
- Tab connectors

Rated voltage V_R : 440/250 V~,
50/60 Hz

Climatic category: 25/085/21

I_R A	I_{Abl} I_{leak} mA	Maße Dimensions l x b x h (mm)	Bestellnummer Ordering code	Approbationen Approvals
10	< 3,5	63,5 x 50,8 x 38	B84108-S1004-A110	x
20	< 3,5	63,5 x 50,8 x 38	B84108-S1004-A120	