

IS201-63

IS201X63

OPTICALLY COUPLED ISOLATOR PHOTOTRANSISTOR OUTPUT



APPROVALS

- UL recognised, File No. E91231
- 'X' SPECIFICATION APPROVALS
- VDE 0884 in 3 available lead forms : -
 - STD
 - G form
 - SMD approved to CECC 00802
- Certified to EN60950 by the following Test Bodies :-
 - Nemko - Certificate No. P96101299
 - Fimko - Registration No. 190469-01..22
 - Semko - Reference No. 9620076 01
 - Demko - Reference No. 305567

DESCRIPTION

The IS201-63 optically coupled isolator consists of an infrared light emitting diode and a NPN silicon photo transistor in a standard 6 pin dual in line plastic package.


FEATURES

- Options :-
 - 10mm lead spread - add G after part no.
 - Surface mount - add SM after part no.
 - Tape&reel - add SMT&R after part no.
- High BV_{CEO} (70V min)
- High Isolation Voltage (3.75kV_{RMS})
- All electrical parameters 100% tested
- Custom electrical selections available



APPLICATIONS

- DC motor controllers
- Industrial systems controllers
- Measuring instruments
- Signal transmission between systems of different potentials and impedances

OPTIONSM SURFACE MOUNT



OPTIONG

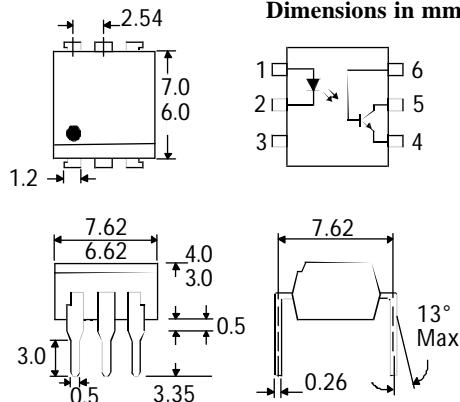

ABSOLUTE MAXIMUM RATINGS (25°C unless otherwise specified)

Storage Temperature	-55°C to + 150°C
Operating Temperature	-55°C to + 100°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	260°C

INPUT DIODE

Forward Current	60mA
Reverse Voltage	6V
Power Dissipation	105mW

OUTPUT TRANSISTOR

Collector-emitter Voltage BV_{CEO}	70V
Collector-base Voltage BV_{CBO}	70V
Emitter-collector Voltage BV_{ECO}	6V
Power Dissipation	160mW

POWER DISSIPATION

Total Power Dissipation	200mW
(derate linearly 2.67mW/°C above 25°C)	

ISOCOM COMPONENTS LTD

Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, Cleveland, TS25 1YD
Tel: (01429) 863609 Fax :(01429) 863581

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F) Reverse Voltage (V_R) Reverse Current (I_R)	6	1.2	1.65	V V μA	$I_F = 60\text{mA}$ $I_R = 10\mu\text{A}$ $V_R = 6\text{V}$
Output	Collector-emitter Breakdown (BV_{CEO}) (note 2) Collector-base Breakdown (BV_{CBO}) Emitter-collector Breakdown (BV_{ECO}) Collector-emitter Dark Current (I_{CEO})	70 70 6		50	V V nA	$I_C = 1\text{mA}$ $I_C = 100\mu\text{A}$ $I_E = 100\mu\text{A}$ $V_{CE} = 10\text{V}$
Coupled	Current Transfer Ratio (CTR) Collector-emitter Saturation Voltage $V_{CE(SAT)}$ Input to Output Isolation Voltage V_{ISO} Input-output Isolation Resistance R_{ISO} Turn-on Time t_{on} Turn-off Time t_{off}	75 10 3750 5×10^{10}		0.4	% % V V_{RMS} Ω	10mA I_F , 10V V_{CE} 1mA I_F , 10V V_{CE} 10mA I_F , 2mA I_C See note 1 $V_{IO} = 500\text{V}$ (note 1) $V_{CE} = 5\text{V}$, $I_F = 2\text{mA}$, $R_L = 75\Omega$ (FIG 1)

Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.

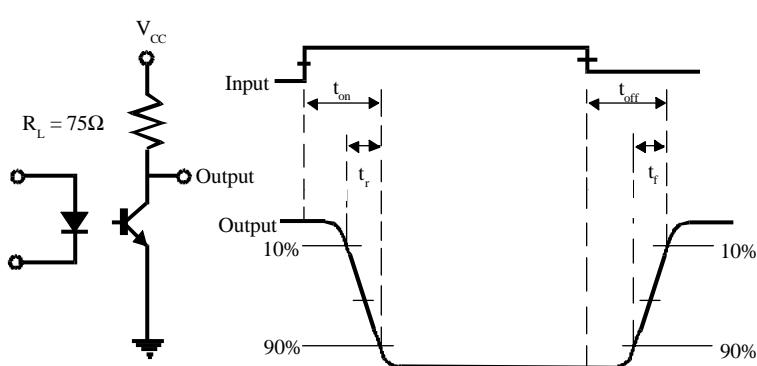
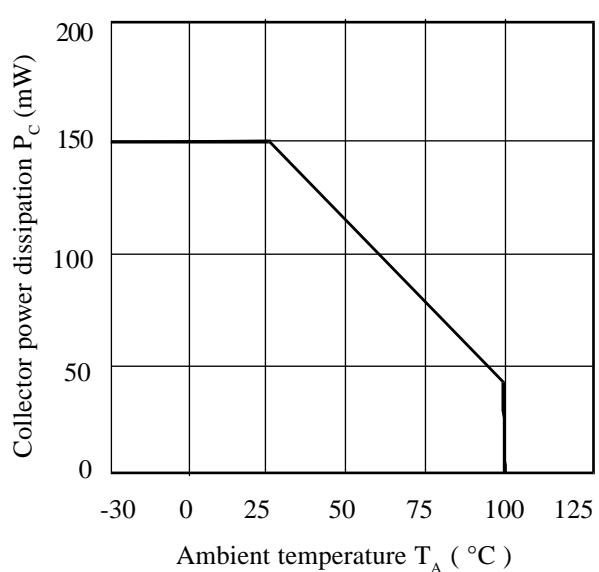
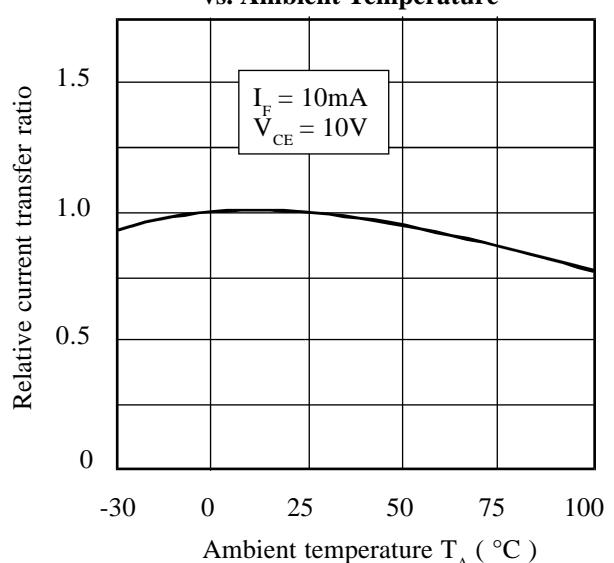
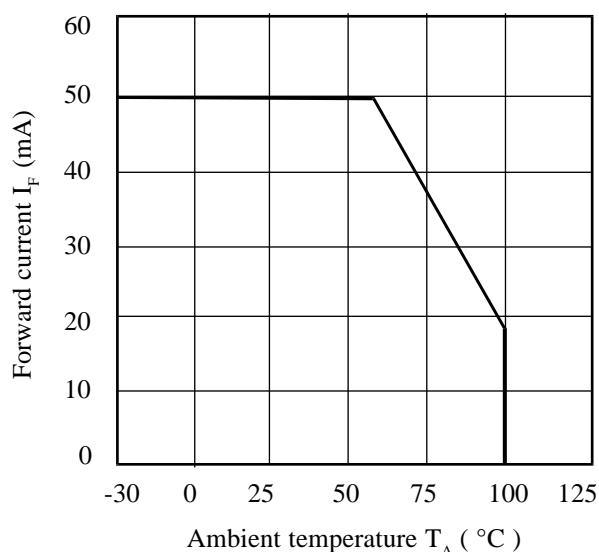
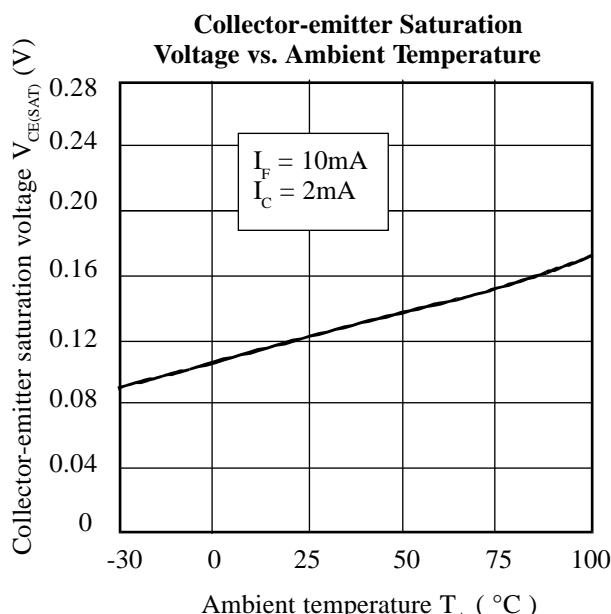
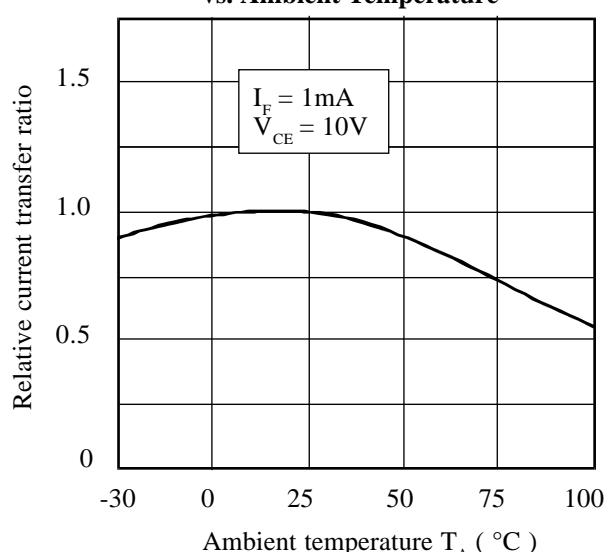


FIG 1

Collector Power Dissipation vs. Ambient Temperature**Relative Current Transfer Ratio vs. Ambient Temperature****Forward Current vs. Ambient Temperature****Relative Current Transfer Ratio vs. Ambient Temperature****Relative Current Transfer Ratio vs. Forward Current**