

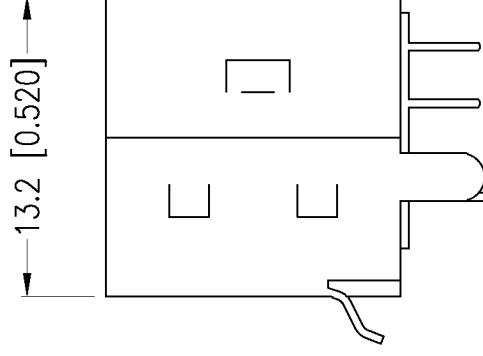


GROUND TAB

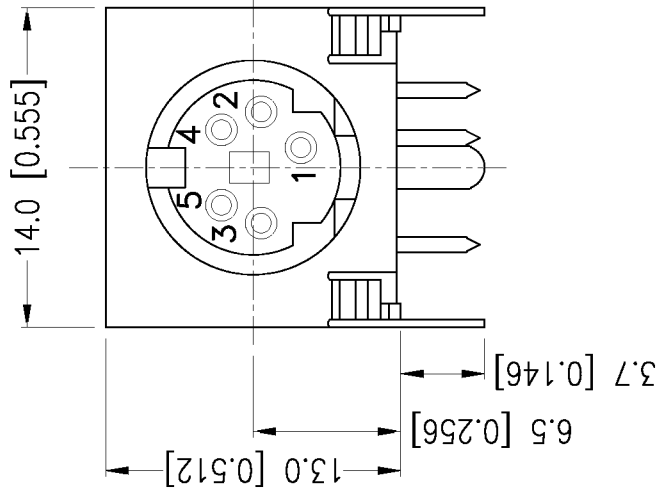

FOOTPRINT (BOTTOM VIEW)

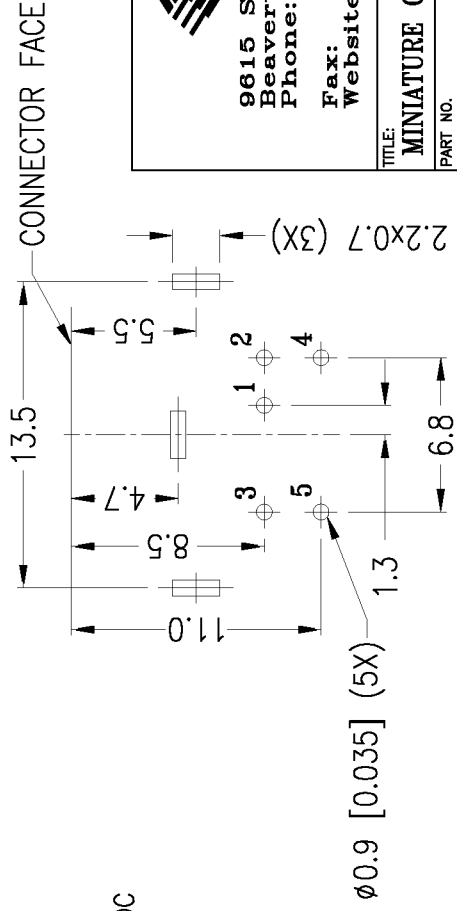

SPECIFICATIONS:

RATING: 100V AC 1A MAX OR
12V DC 2A MAX
INSULATION RESISTANCE:
50 MOHM MIN AT 250V DC
DIELECTRIC STRENGTH:
250V AC, 1 MINUTE
CONTACT RESISTANCE:
30 MOHM MAX
INSERTION FORCE:
4.5KG MAX
WITHDRAWAL FORCE:
0.9KG~3KG



9615 SW Allen, Suite 103
Beaverton, OR 97005
Phone: (503) 643-4898
Fax: (503) 643-6129
Website: www.cuistack.com

TITLE: MINIATURE CIRCULAR CON.-FULLY SHIELDED		
PART NO.	MD-50SG	UNITS: MM [INCHES]
DRAWN BY:	APPROVED BY:	SCALE: 3X