



GILBERT ENGINEERING CO., INC.

5310 WEST CAMELBACK, GLENDALE, ARIZONA 85301-7597 USA
TEL: 602-245-1050/800-528-5567 FAX: 602-931-0684/800-344-6358

CABLE SPLICE (NON-INTEGRAL SLEEVE)

CABLE SPLICE CONNECTOR


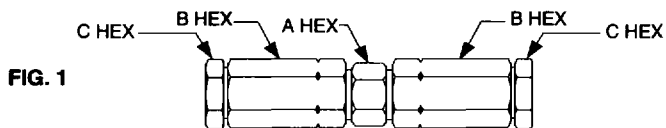


FIG. 1

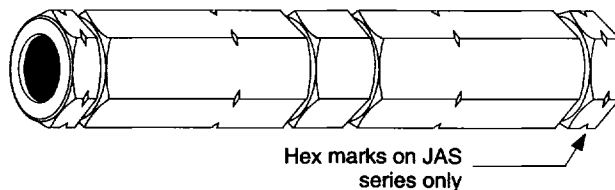

Hex marks on JAS series only

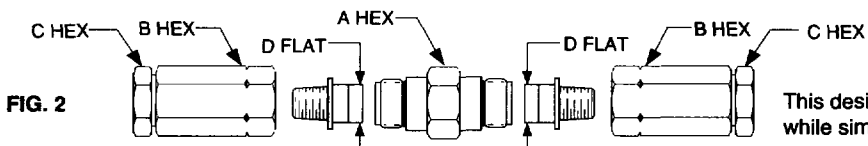


FIG. 2

This design provides for seizing of the center conductor while simultaneously seizing the outer conductor.

PART NUMBER	FIG.	CENTER COND. ①	CABLE O.D. ①	DIELECTRIC O.D. ①	DIMENSION - (INCH)			
					A	B	C	D
GP-412-SP-A	1	.080	.412	.360	13/16	13/16	13/16	-
GP-412-SP-DU	1	.092	.412	.360	15/16	13/16	13/16	-
GP-500-SP-A	1	.100	.500	.450	15/16	15/16	13/16	-
GP-500-SP-DU	1	.109	.500	.450	1-1/8	1-1/4	13/16	-
GP-750-SP-A	1	.148	.750	.686	1-1/8	1-1/4	1-1/4	-
GP-750-SP-DU	1	.167	.750	.686	1-3/8	1-3/8	1-1/4	-
GP-412-SP-JA	2	.080	.460	.350	13/16	13/16	13/16	.500
GP-500-SP-JA	2	.100	.555	.444	15/16	15/16	15/16	.562
GP-750-SP-JA	2	.148	.790	.675	1-1/8	1-1/8	1-1/8	.875
GP-412-SP-JAS	2	.080	.482	.373	13/16	13/16	13/16	.500
GP-500-SP-JAS	2	.100	.571	.462	15/16	15/16	15/16	.562
GP-750-SP-JAS	2	.148	.816	.692	1-1/8	1-1/8	1-1/8	.875
GP-4920-SP	2	.080	.480	.360	13/16	7/8	7/8	.500
GP-4930-SP	2	.114	.650	.500	1-1/8	1-1/4	1-1/8	.875
GP-6020-SP	2	.080	.650	.500	1	1-1/8	1-1/8	.562
GP-6030-SP	2	.114	.870	.720	1-1/8	1-3/8	1-3/8	.870

① NOMINAL DIMENSIONS