




RF Coax Connectors

SMT | QuickGrip[®] Connectors (Continued)Inter-Series Cable
Assemblies (Continued)

MCX Straight Plug

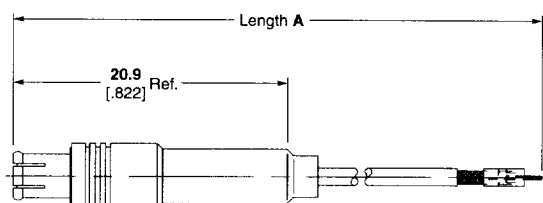


Cable	Assembly Length (A)	M/A-COM Model No.	Part No.
Omni-Flex 100	100 [4]	9970-4100-06	1330400-1
	200 [8]	9970-4200-06	1330400-2
	305 [12]	9970-4305-06	1330400-3
Omni-Flex 200	100 [4]	9980-4100-06	1330400-4
	200 [8]	9980-4200-06	1330400-5
	305 [12]	9980-4305-06	1330400-6

Note:

1. Cable length tolerances: Length 'A' mm [In], Tolerance mm [In],
50 to 100 [3.94], ± 3 [$\pm .12$], 101 to 500 [3.98 to 19.69], ± 5 [$\pm .20$],
Over 500 [19.69], ± 10 [$\pm .39$]

MCX Bulkhead Jack

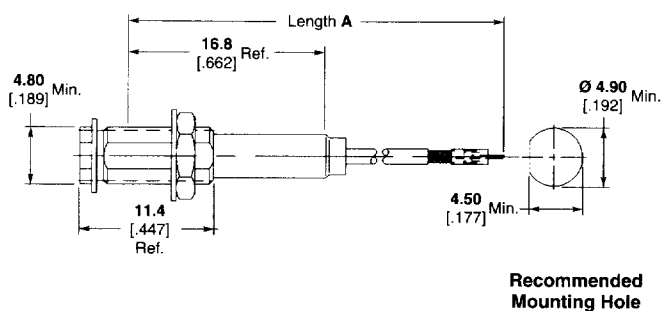


Cable	Assembly Length (A)	M/A-COM Model No.	Part No.
Omni-Flex 100	100 [4]	9970-4100-07	1408051-1
	200 [8]	9970-4200-07	1408051-2
	305 [12]	9970-4305-07	1408051-3
Omni-Flex 200	100 [4]	9980-4100-07	1408051-4
	200 [8]	9980-4200-07	1408051-5
	305 [12]	9980-4305-07	1408051-6

Note:

1. Cable length tolerances: Length 'A' mm [In], Tolerance mm [In],
50 to 100 [3.94], ± 3 [$\pm .12$], 101 to 500 [3.98 to 19.69], ± 5 [$\pm .20$],
Over 500 [19.69], ± 10 [$\pm .39$]


MCX Right Angle Plug

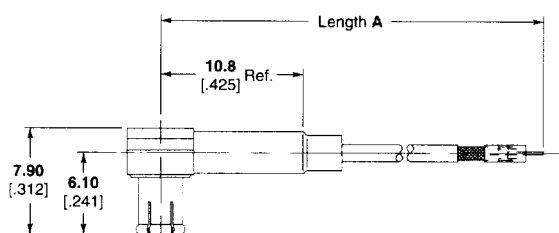

Cable	Assembly Length (A)	M/A-COM Model No.	Part No.
Omni-Flex 100	100 [4]	9970-4100-08	1330401-1
	200 [8]	9970-4200-08	1330401-2
	305 [12]	9970-4305-08	1330401-3
Omni-Flex 200	100 [4]	9980-4100-08	1330401-4
	200 [8]	9980-4200-08	1330401-5
	305 [12]	9980-4305-08	1330401-6

Note:

1. Cable length tolerances: Length 'A' mm [In], Tolerance mm [In],
50 to 100 [3.94], ± 3 [$\pm .12$], 101 to 500 [3.98 to 19.69], ± 5 [$\pm .20$],
Over 500 [19.69], ± 10 [$\pm .39$]

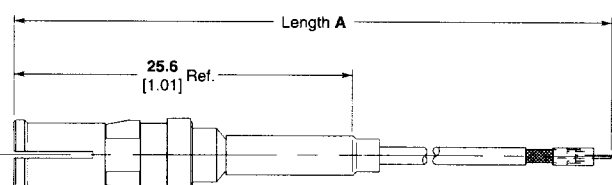50 Ohm D-sub Coaxial
Receptacle

Cable	Assembly Length (A)	M/A-COM Model No.	Part No.
Omni-Flex 100	100 [4]	9970-4100-09	1408052-1
	200 [8]	9970-4200-09	1408052-2
	305 [12]	9970-4305-09	1408052-3
Omni-Flex 200	100 [4]	9980-4100-09	1408052-4
	200 [8]	9980-4200-09	1408052-5
	305 [12]	9980-4305-09	1408052-6

Note:

1. Cable length tolerances: Length 'A' mm [In], Tolerance mm [In],
50 to 100 [3.94], ± 3 [$\pm .12$], 101 to 500 [3.98 to 19.69], ± 5 [$\pm .20$],
Over 500 [19.69], ± 10 [$\pm .39$]