


**Figure 8**

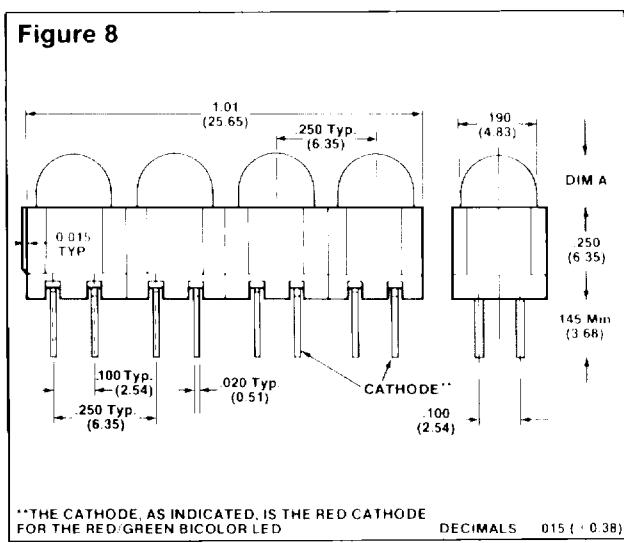

### T-1 3/4 (5mm) multiple

PART NO.	COLOR	VF	DIM A		
			mcd	mA	in. (mm)
MV60538.MP8	RED	1.7	2.0	20	0.140 (3.56)
MV63538.MP8	YLW	2.1	18.0	20	0.140 (3.56)
MV64538.MP8	GRN	2.2	26.0	20	0.140 (3.56)
MV67538.MP8	WHT	2.1	14.0	20	0.140 (3.56)
MV60539.MP8	RED	1.7	3.2	20	0.195 (4.95)
MV63539.MP8	YLW	2.1	20.0	20	0.195 (4.95)
MV64539.MP8	GRN	2.2	28.0	20	0.195 (4.95)
MV67539.MP8	WHT	2.1	15.0	20	0.195 (4.95)

### LOW CURRENT (2mA)

HLMP47009.MP8	WHT	1.8	2.0	2	0.195 (4.95)
HLMP47199.MP8	YLW	1.9	2.0	2	0.195 (4.95)
HLMP47409.MP8	GRN	1.9	3.0	2	0.195 (4.95)

### ULTRA BRIGHT

MV33509.MP8	YLW*	2.2	150.0	20	0.195 (4.95)
MV34509.MP8	GRN*	2.2	150.0	20	0.195 (4.95)
MV37509.MP8	WHT	2.2	150.0	20	0.195 (4.95)

### INTEGRAL RESISTOR

MR30509.MP8	WHT	5.0	2.0	13	0.195 (4.95)
MR30519.MP8	WHT	12.0	2.0	13	0.195 (4.95)
MR33509.MP8	YLW	5.0	4.0	10	0.195 (4.95)
MR33519.MP8	YLW	12.0	4.0	13	0.195 (4.95)
MR34509.MP8	GRN	5.0	4.0	12	0.195 (4.95)
MR34519.MP8	GRN	12.0	4.0	13	0.195 (4.95)
MR37509.MP8	WHT	5.0	4.0	10	0.195 (4.95)
MR37519.MP8	WHT	12.0	4.0	13	0.195 (4.95)

### BICOLOR

MV54919.MP8	G	2.3	6.0	20	0.195 (4.95)
-------------	---	-----	-----	----	--------------

NOTE: 1. Multiples of four is our standard configuration

Options: To obtain units in multiples of two add a "2" suffix to the part number i.e. MV64539.MP8-2. To obtain units in multiples of three add a "3" suffix

2. Custom color combinations are available

All electrical values are typical

\*Clear lens