

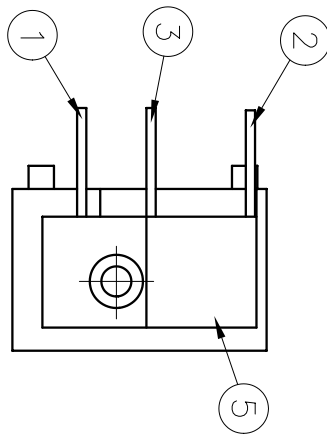
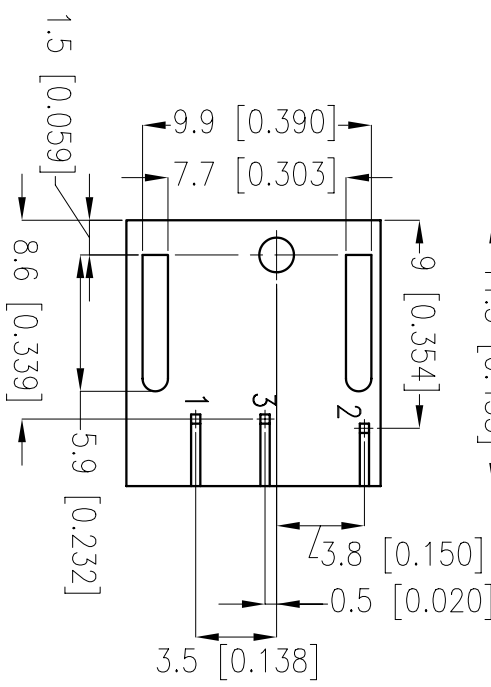
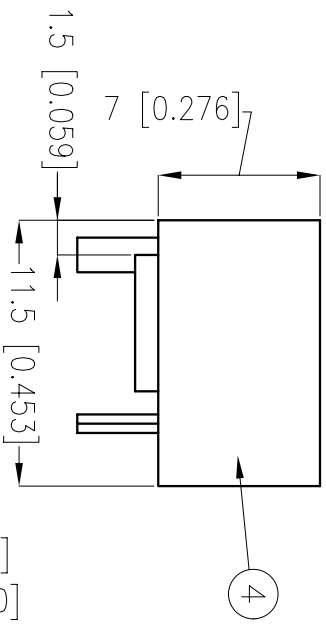
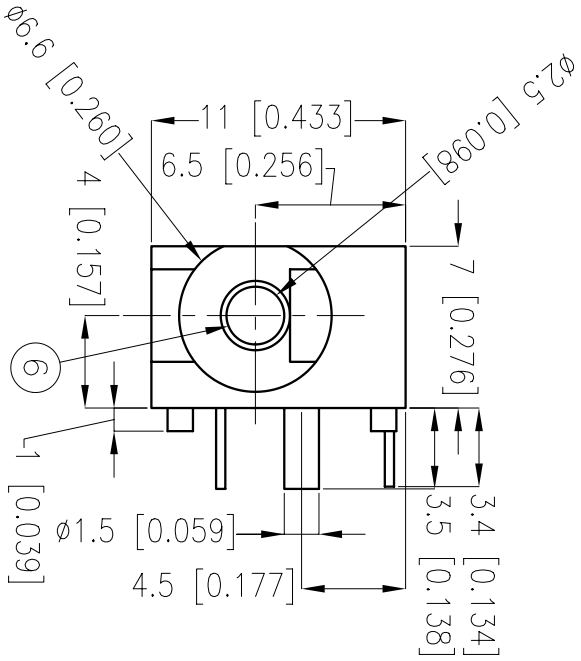


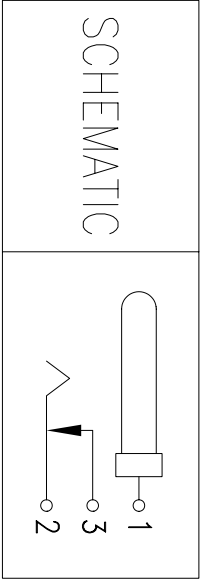

SPECIFICATIONS:
 RATING: 12V DC @ 1A
 CONTACT RESISTANCE:
 30m OHMS MAX
 INSULATION RESISTANCE:
 100M OHMS MIN @ 500V DC
 WITHSTAND VOLTAGE:
 500V AC FOR 1 MINUTE
 LIFE: 5,000 CYCLES

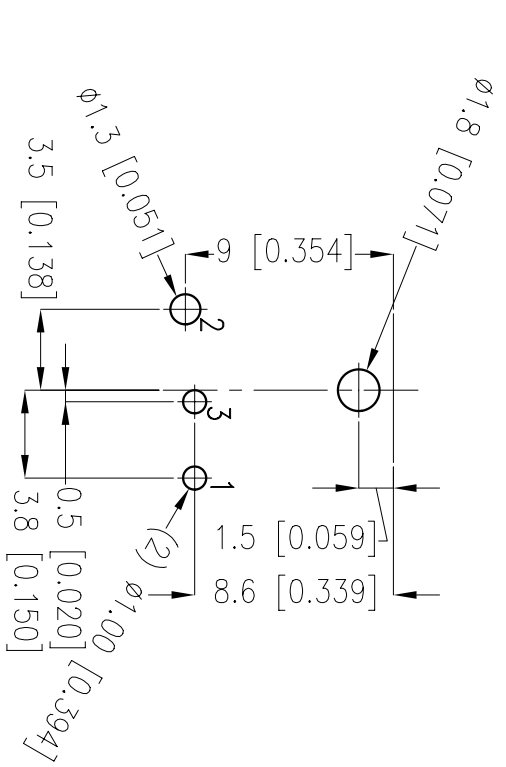

6	PIN(Ø2.5)	COPPER	1	NICKEL PLATED
5	COVER	PBT	1	BLACK COLOR
4	HOUSING	PBT	1	BLACK COLOR
3	BREAK TERMINAL	0.4T BRASS	1	SILVER PLATED
2	SLEEVE SPRING	0.2T TiCuR1-M-EH	1	SILVER PLATED
1	PIN TERMINAL	0.4T BRASS	1	SILVER PLATED
NO.	DESCRIPTION	MATERIAL	QTY	FINISH

cui STACK
 9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-275-4899
 Fax: (503) 643-6129
 Website: www.cuistack.com

TITLE: DC POWER JACK

PART NO. PJ-012B **UNITS:** MM [INCHES]

DRAWN BY: Todd R. White **APPROVED BY:** **SCALE:** 3X

PC FILE NAME: PJ-012B.DWG

COPYRIGHT 1997 BY CUI STACK, INC.