



Number of contacts

9-37

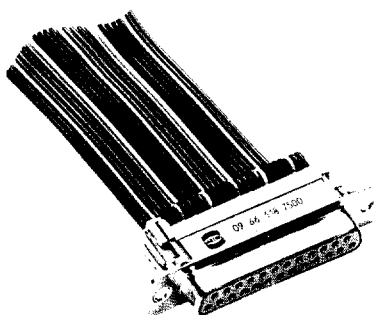

Insulation displacement termination

Identification

No. of contacts

Part No.

Performance Levels

Explanations page 6

Other performance levels on request

Performance Level

3

Performance Level

2

Male connector

– insulation displacement termination

pitch 1.27 mm

tinned metal shell

with dimples

9

09 66 128 7700

09 66 128 6700

15

09 66 228 7700

09 66 228 6700

25

09 66 328 7700

09 66 328 6700

37

09 66 428 7700

09 66 428 6700

Female connector

– insulation displacement termination

pitch 1.27 mm

tinned metal shell

9

09 66 118 7500

09 66 118 6500

15

09 66 218 7500

09 66 218 6500

25

09 66 318 7500

09 66 318 6500

37

09 66 418 7500

09 66 418 6500

Strain relief clamp

corrosion resistant steel

for male and female connectors

9

09 66 108 0000

09 66 108 0000

15

09 66 208 0000

09 66 208 0000

25

09 66 308 0000

09 66 308 0000

37


09 66 408 0000

09 66 408 0000

Dimensions

Dimensions in mm


Male connector



Dimples

	a _{±0.76}	b	c _{±0.76}	d _{max}
9	31.19	25	12.93	18.73
15	39.52	33.3	12.93	27.26
25	53.42	47	12.93	40.78
37	69.7	63.5	12.93	57.44

Female connector

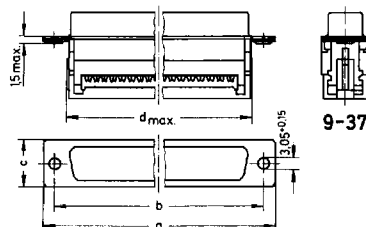

9-37

Specified conductors

stranded wires AWG 28/7
AWG 26/7

solid wires AWG 30/1
AWG 28/1

Strain relief clamp

