



2 5 JACKS

GENERAL SPECIFICATIONS:

MECHANICAL:

INSERTION / EXTRACTION FORCE .3Kg - 2Kg.

LIFE TEST - 5000 CYCLES.

ELECTRICAL:

CONTACT RESISTANCE: (DCR .1A)

INITIAL TEST: 30 mΩ


AFTER TEST: 60 mΩ

INSULATION RESISTANCE: > 100 MΩ @ 500 VDC @ 90 - 95% RH, 40°C.

WITHSTANDING VOLTAGE: 500V/ AC FOR ONE MINUTE.






RATED VOLTAGE: DC 16 VOLTS., 20mA - 0.3A.

OPERATING TEMP: -25° - +80°C ± 2°C.

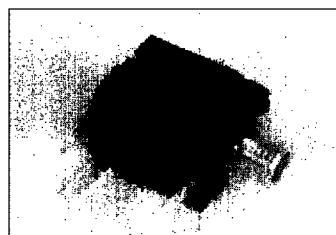




2002-00

RECOMMENDED
PCB LAYOUT
(BOTTOM VIEW)

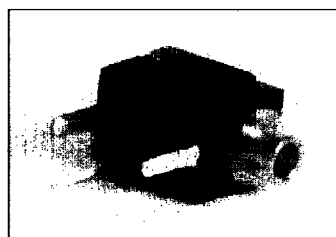

2002-01


RECOMMENDED
PCB LAYOUT
(BOTTOM VIEW)

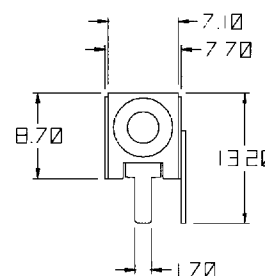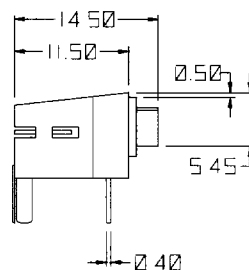

ELECTRONICS




PHONE (253) 851-8005
FAX (253) 851-8090

2.5 JACKS

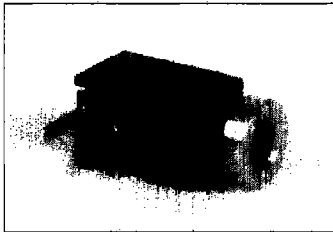




2004-10

RECOMMENDED
PCB LAYOUT
(BOTTOM VIEW)

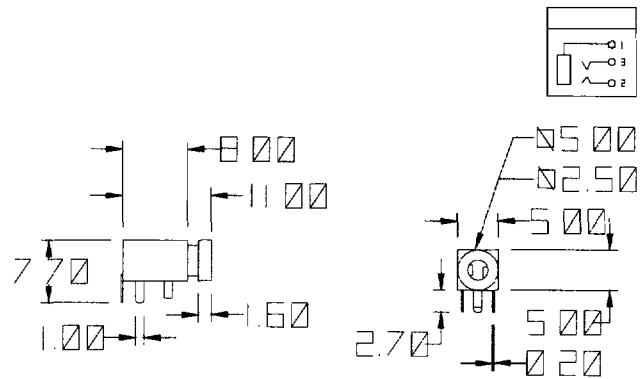




2052-xx

RECOMMENDED
PCB LAYOUT
(BOTTOM VIEW)

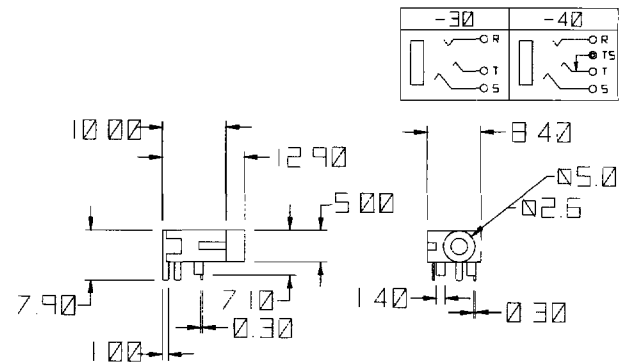
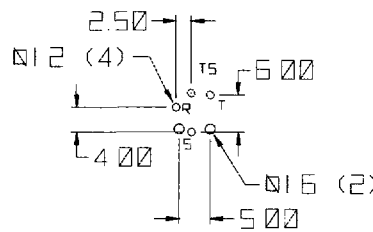


2053-10

RECOMMENDED
PCB LAYOUT
(BOTTOM VIEW)

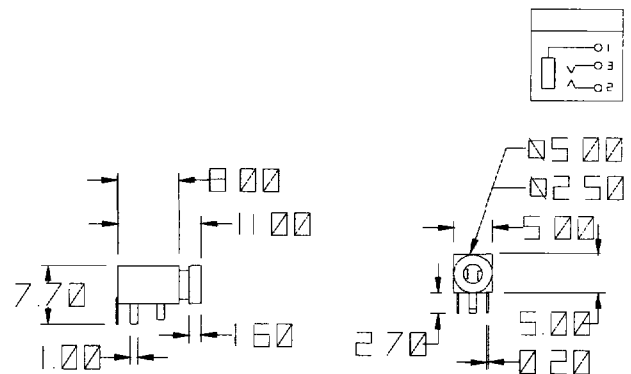


2051-10

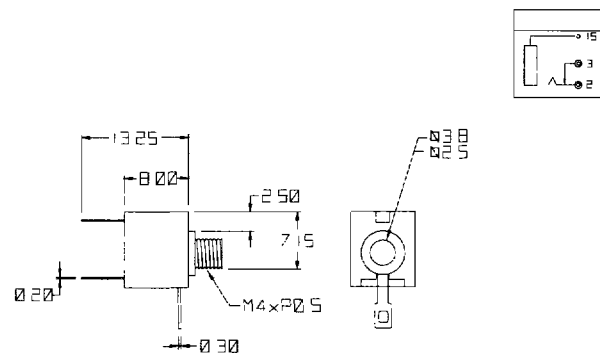






ELECTRONICS

PHONE (253) 851-8005
FAX (253) 851-8090

2.5 JACKS







2051-xx



2205-xx

SURFACE MOUNT TYPE



ELECTRONICS

PHONE (253) 851-8005
FAX (253) 851-8090