



Ribbon Series Connector, IDC Flat Cable, Male

Materials

Contact:

Phosphor Bronze

Insulator:

Polyester, Glass-filled

UL 94V-0, Black

Shell:

Steel Strip

Finishes


Contact:

Code A - Au Flash over
50 uinches Ni undercoat

Code B - 30 uinches Au
50 uinches Ni undercoat

Notes:

Consult our factory
specialists for your
specific design needs.

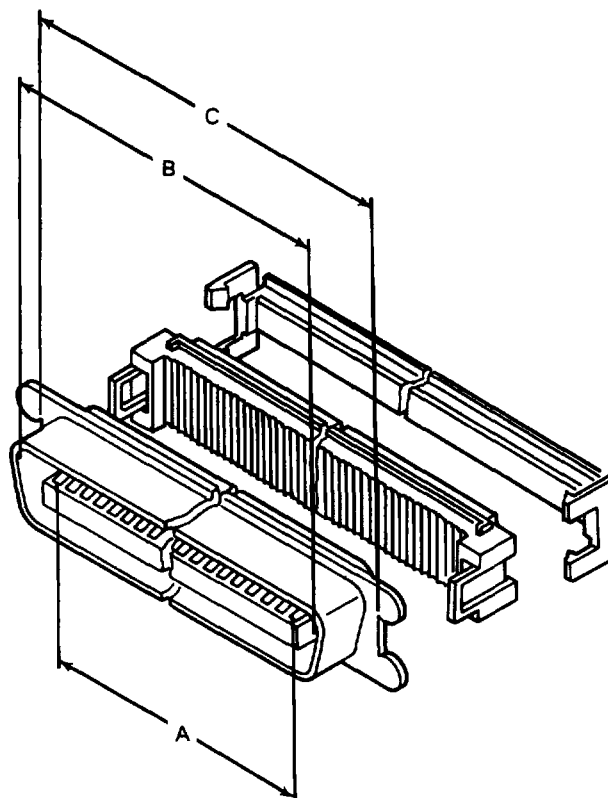

CONTACT POSITION	PLATING CODE	PART NUMBER		DIMENSION			
		WITHOUT S.R.	WITH S.R.	A	B	C	D
24	A	330-023-100	330-023-110	1.910	1.590	1.430	.940
	B	330-023-200	330-023-310	[48.60]	[40.40]	[36.30]	[23.76]
36	A	330-033-100	330-033-110	2.430	2.100	1.940	1.450
	B	330-033-200	330-033-310	[61.60]	[53.40]	[49.20]	[36.72]
50	A	330-053-100	330-053-110	3.010	2.690	2.550	2.040
	B	330-053-200	330-053-310	[76.40]	[68.20]	[64.80]	[51.84]