


0.187" (4.75mm) Crimp-On Quick Disconnect Receptacles w/Strain Relief

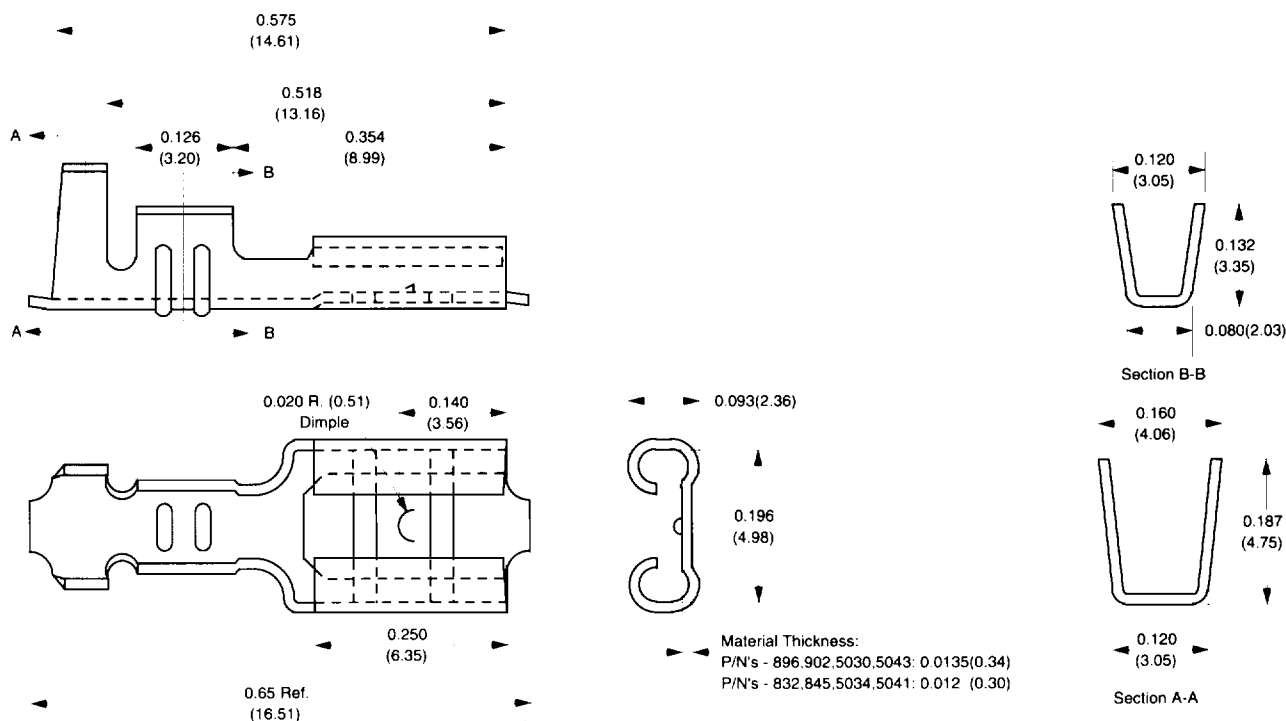

B

Detail	Loose Part Number	Finish Code	Format	Application Size	Wire Range	Insulation Diameter	Applicator System
B	896	-6	Loose Piece	0.187" x 0.020" (4.75mm x 0.51mm)	#20 Awg-14 Awg	0.075"-0.145" (1.91mm x 3.68mm)	N/A
B	5030	-9	Reeled	0.187" x 0.020" (4.75mm x 0.51mm)	#20 Awg-14 Awg	0.075"-0.145" (1.91mm x 3.68mm)	Model 4000
B	5030	-11	Reeled	0.187" x 0.020" (4.75mm x 0.51mm)	#20 Awg-14 Awg	0.075"-0.145" (1.91mm x 3.68mm)	Model 4000
B	902	-6	Loose Piece	0.187" x 0.032" (4.75mm x 0.81mm)	#20 Awg-14 Awg	0.075"-0.145" (1.91mm x 3.68mm)	N/A
B	5043	-9	Reeled	0.187" x 0.032" (4.75mm x 0.81mm)	#20 Awg-14 Awg	0.075"-0.145" (1.91mm x 3.68mm)	Model 4000
B	5043	-11	Reeled	0.187" x 0.032" (4.75mm x 0.81mm)	#20 Awg-14 Awg	0.075"-0.145" (1.91mm x 3.68mm)	Model 4000

0.205" (5.21mm) Crimp-On Quick Disconnect Receptacles w/Strain Relief

Detail	Loose Part Number	Finish Code	Format	Application Size	Wire Range	Insulation Diameter	Applicator System
B	832	-6	Loose Piece	0.205" x 0.020" (5.21mm x 0.51mm)	#22 Awg-#18 Awg	0.075"-0.120" (1.91mm x 3.05mm)	N/A
B	5034	-9	Reeled	0.205" x 0.020" (5.21mm x 0.51mm)	#22 Awg-#18 Awg	0.075"-0.120" (1.91mm x 3.05mm)	Model 4000
B	5034	-11	Reeled	0.205" x 0.020" (5.21mm x 0.51mm)	#22 Awg-#18 Awg	0.075"-0.120" (1.91mm x 3.05mm)	Model 4000
B	845	-6	Loose Piece	0.205" x 0.032" (5.21mm x 0.81mm)	#22 Awg-#18 Awg	0.075"-0.120" (1.91mm x 3.05mm)	N/A
B	5041	-9	Reeled	0.205" x 0.032" (5.21mm x 0.81mm)	#22 Awg-#18 Awg	0.075"-0.120" (1.91mm x 3.05mm)	Model 4000
B	5041	-11	Reeled	0.205" x 0.032" (5.21mm x 0.81mm)	#22 Awg-#18 Awg	0.075"-0.120" (1.91mm x 3.05mm)	Model 4000